

SmartReader Plus 4

Product Specifications

Type: Four-Channel Pressure, Temperature & RH

GENERAL SPECIFICATIONS


Size:	107 mm x 74 mm x 22 mm (4.2" x 2.9" x 0.9")
Weight:	110 grams (3.75 ounces)
Case Material:	Noryl® plastic
Battery:	3.6 volt Lithium
Resolution:	12-bit (1 part in 4096)
Mounting:	Magnetic backing or locking eyel et
Clock Accuracy:	+/- 2 seconds per day
Sampling Methods:	Continuous (First-in, First-out)*, Stop When Full (Fill-then-stop) *Not available with sample rates faster than eight seconds
Operating Limits:	-40 to 70°C (-40 to 158°F) and 0 to 95% RH (non-condensing) IBM PC or 100% compatible with at least one free serial port,
PC Requirements:	2 MB of RAM memory, and 2 MB of hard disk space
Software Requirements:	TrendReader® Standard 2 (compatible with Windows® 2000, and XP)

Memory Size:	32KB (capable of storing up to 21,500 readings)
(2 memory sizes available)	128KB (capable of storing up to 87,000 readings)
Sampling Rates:	User selectable rates from 25 per second to once every eight hours (BP-101 battery pack or PS-201 power supply required for sampling rates faster than eight seconds)
Number of Channels:	Four (one internal temperature sensor for ambient temperature, one for pressure, and two for the optional remote relative humidity and temperature probe [model E-H-020A])

SENSOR SPECIFICATIONS

Temperature Sensor (internal)	NTC Thermistor - 10,000 Ohm @ 25° C (77°F)
Range:	-40 to 70° C (-40 to 158°F)
Accuracy:	+/- 0.2° C over the range of 0 to 70° C (+/- 0.3° F over the range of 32 to 158° F)
Resolution:	0.03° C (0.05° F) @ 25° C; better than 0.07° C (0.12° F) between -25 and 70° C (-13° and 158° F); better than 0.13° C (0.23° F) between -40 and -25° C (-40° F and -13° F)
Pressure Sensor Ranges	Resolution
0 to 10" WC (2.5 kPa) Gauge	0.006"
0 to 5 psi (30 kPa) Gauge	0.003 psi (0.02 kPa)
0 to 30 psi (200 kPa) Absolute	0.015 psi (0.1 kPa)
0 to 30 psi (200 kPa) Gauge	0.015 psi (0.1 kPa)
0 to 100 psi (700 kPa) Absolute	0.05 psi (0.34 kPa)
0 to 100 psi (700 kPa) Gauge	0.05 psi (0.34 kPa)
0 to 150 psi (1000 kPa) Gauge	0.05 psi (0.34 kPa)
Calibrated Accuracy	
+/- 0.5% of full scale @ 25° C (77°F)	

The SmartReader Plus 4 data logger provides easy monitoring and troubleshooting of pneumatic control systems. The unit is completely self-contained with a 1/4" quick-release pressure fitting to allow a fast and trouble-free connection. As an added bonus, the SmartReader Plus 4 also monitors temperature and relative humidity.

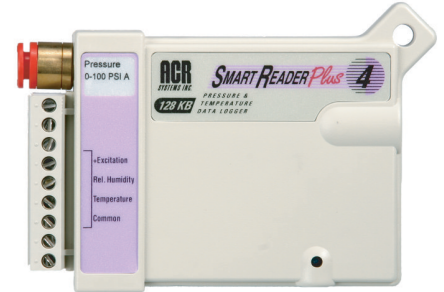

WARRANTY

Internal Battery:	10 Years
Data Logger:	3 Years

APPLICATIONS

Performance tracking of pneumatically controlled valves; verifying thermostat and humidistats; monitoring sensitive shipments, etc.

Model#:	Cat #:
SRP-004-010	01-0090
SRP-004-010-128K	01-0120
SRP-004-5G	01-0091
SRP-004-5G-12 8K	01-0115
SRP-004-30G	01-0093
SRP-004-30G-12 8K	01-0117
SRP-004-30A	01-0092
SRP-004-30A-12 8K	01-0116
SRP-004-100G	01-0095
SRP-004-100G-12 8K	01-0119
SRP-004-100A	01-0094
SRP-004-100A-12 8K	01-0118
SRP-004-150G	01-0097
SRP-004-150G-12 8K	01-0139