

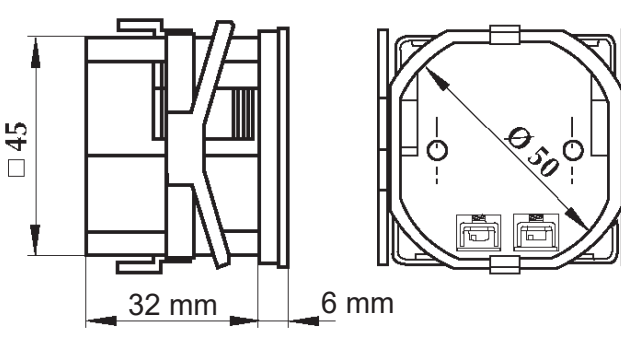
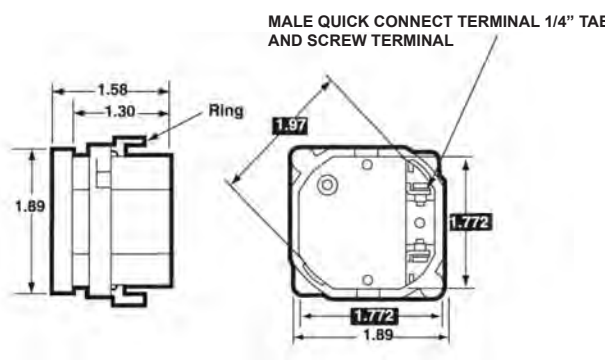
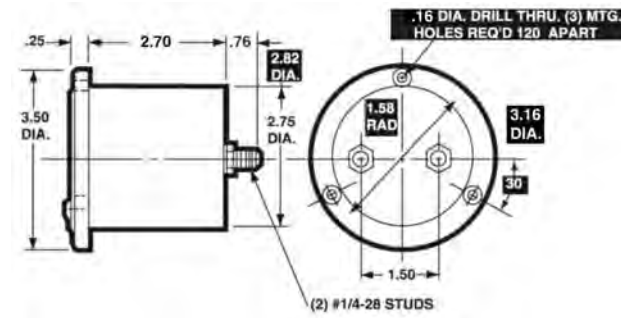
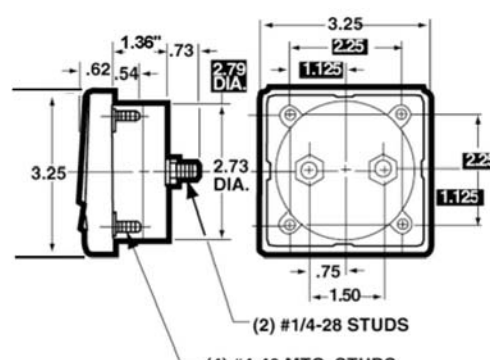
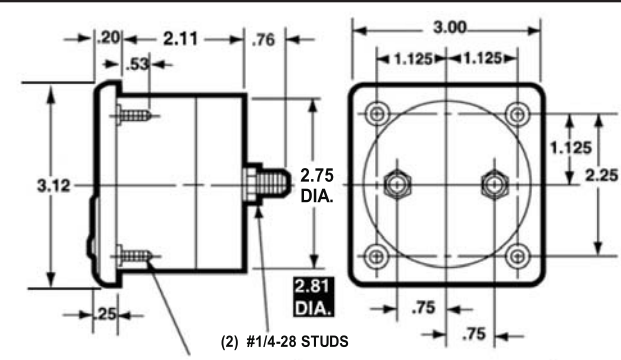
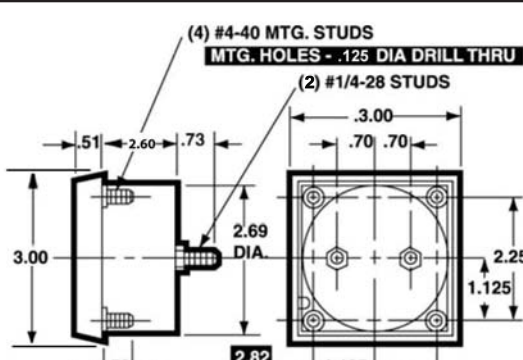
Elapsed Time Meters

- Record “on” time of electrical equipment
- Choice of AC or DC Models
- No reset capability means virtually tamper proof
- 2 sizes and 6 different case styles

Model 112ET	Model 1357ET / Wide-Vue
 Model 112ET is a rectangular meter with a white face and black casing. It features a digital display showing '000001.1' and is labeled 'ELAPSED TIME' and 'model 112'. CE 	 Model 1357ET / Wide-Vue is a rectangular meter with a white face and black casing. It features a digital display showing '000000.0' and is labeled 'ELAPSED TIME', 'FULL HOURS', 'TENTHS', '120 VOLTS', and '60 HERTZ'.
Model 55ET / Round	Model 109ET
 Model 55ET / Round is a round meter with a white face and black casing. It features a digital display showing '00:00:00.0' and is labeled 'ELAPSED TIME', 'HOURS', '120 VOLTS', and '60 HERTZ'.	 Model 109ET is a rectangular meter with a white face and black casing. It features a digital display showing '000000.0' and is labeled 'ELAPSED TIME' and 'model 109'. CE 
Model 2153ET / Century	Model 57ET / Rectangular
 Model 2153ET / Century is a rectangular meter with a white face and black casing. It features a digital display showing '00:00:00.0' and is labeled 'ELAPSED TIME', 'FULL HOURS', 'TENTHS', '120 VOLTS', and '60 HERTZ'.	 Model 57ET / Rectangular is a rectangular meter with a white face and black casing. It features a digital display showing '00:00:00.0' and is labeled 'ELAPSED TIME', 'HOURS', '120 VOLTS', and '60 HERTZ'.

Elapsed Time Meters

Dimensions

1 - 1/2" Model 109ET  Units in mm	1 - 1/2" Model 112ET  MALE QUICK CONNECT TERMINAL 1/4" TAB AND SCREW TERMINAL Ring 1.58 1.30 1.89 1.772 1.772 1.97 1 = Panel Meter Cut-out Dimensions
3 - 1/2" Model 55ET  .16 DIA. DRILL THRU. (3) MTG. HOLES REQ'D 120° APART 3.50 DIA. 2.70 .76 2.82 DIA. 2.75 DIA. 3.16 DIA. 1.58 RAD 1.50 (2) #1/4-28 STUDS	3 - 1/2" Model 1357ET  3.25 1.36 .73 2.79 DIA. 2.73 DIA. 2.25 1.125 1.125 2.25 1.50 (2) #1/4-28 STUDS (4) #4-40 MTG. STUDS MTG. HOLES - .125 DIA. DRILL THRU
3 - 1/2" Model 57ET  3.12 2.11 .76 2.75 DIA. 2.81 DIA. 3.00 1.125 1.125 2.25 1.125 .75 .75 (2) #1/4-28 STUDS (4) #4-40 MTG. STUDS MTG. HOLES - .125 DIA. DRILL THRU	3 - 1/2" Model 2153ET  (4) #4-40 MTG. STUDS MTG. HOLES - .125 DIA DRILL THRU (2) #1/4-28 STUDS 3.00 .70 .70 2.25 1.125 2.25 1.125 2.25 2.69 DIA. 2.82 DIA. 1.125 2.25 (4) #4-40 MTG. STUDS MTG. HOLES - .125 DIA DRILL THRU

Specifications

Accuracy	Models 109ET & 112ET: $\leq .01\%$ / 24 hrs
	Models 55ET, 57ET, 1357ET & 2153 ET: Synchronous with AC Power
Movement	Synchronous clock motor
Overload (1 sec.)	10 times F.S.
Maximum Indication	See ordering information
Power Consumption	Models 109ET, 112ET: .5 watts
	All other models: 2.5 watts
Case	Models 55ET, 57ET, 2153ET: high density plastic
	Models 109ET, 112ET, 1357ET: high density black acrylic
Operating Temperature	-4°F to +149°F (-20°C to +65°C)
Net Weight	Models 112ET, 109ET: 2.5 oz. (0.07kg)
	Models 55ET, 57ET: 12.5 oz. (0.35kg)
	Models 1357ET, 2153ET: 13 oz. (0.37kg)

Ordering Information

Operating Voltage	Maximum Indication (hours)	Power Consumption	Accuracy	Model Size	Model No	Catalog No.
10-80 DCV	999,999.9	.5 watt	$\leq .01\%$ / 24 hrs	1 - 1/2"	109ET	03618
120 VAC	99,999.99	.5 watt	$\leq .01\%$ / 24 hrs		112ET	03622
120 VAC 60 Hz	99,999.9	2.5 watts	synchronous	3 - 1/2"	55ET	03580
	99,999.9	2.5 watts	synchronous		57ET	03590
	99,999.9	2.5 watts	synchronous		1357ET	03595
	99,999.9	2.5 watts	synchronous		2153ET	17720
240 VAC 60 Hz	99,999.9	2.5 watts	synchronous	3 - 1/2"	55ET	03600
	99,999.9	2.5 watts	synchronous		57ET	03610
	99,999.9	2.5 watts	synchronous		1357ET	03615
	99,999.9	2.5 watts	synchronous		2153ET	17721