

NEW



Investigate power characteristics and analyze the causes of problems

Exceptional ease of use and international standard-compliant reliability








Maintain and manage power supplies and analyze problems more easily and reliably than ever before

POWER QUALITY ANALYZER PQ3198 and PQ3100

The critical importance of electrical power in today's society necessitates daily maintenance and management to ensure that problems don't occur. When they do, for example due to an equipment failure or abrupt surge in demand, engineers face the need to analyze the cause quickly. The POWER QUALITY ANALYZER PQ3198 and PQ3100 provide robust support for field personnel who need to analyze power characteristics in the form of measurement capabilities that reliably captures the full range of power anomalies and exceptional ease of use throughout the entire user experience, from connecting the instrument to recording data.








Analyze equipment power problems

Capture the full range of power supply anomalies, including momentary interruptions, voltage drops, and frequency fluctuations, while recording trends to help investigate the causes of unexpected equipment malfunctions and sudden stoppages.





Record quality data for power systems

Record fluctuations in voltage, current, power, harmonics, and flicker when connecting a highly variable system such as a renewable energy source or EV charging station to the grid. Easily analyze the data with the included PQ ONE software.





Measure AC/DC power

Use AC/DC auto-zero current sensors to measure DC current accurately over extended periods of time. Since the sensors are powered by the instrument, there's no need to set up a separate power supply.



Troubleshoot power supplies and verify power quality

PQ3198



Class A compliance under international standards

Basic voltage measurement accuracy of ±0.1%

High-voltage, wideband performance

measurement

measurement parameters



Applications



Investigate power supply anomalies

Investigate the causes of equipment failures and malfunctions, including issues that are difficult to identify, such as when a device causes a properly-functioning piece of equipment that is connected to the same power outlet to experience a voltage drop.



Verify the quality of power from a solar power system

Check fluctuations in the output voltage of a power conditioner in a solar power system along with flicker and transient voltages. You can also measure fluctuations in the frequency of the grid interconnection and fluctuations in the harmonic voltage and current components of the system's output.



Verify the quality of power supplied by an EV rapid charger

Since the PQ3198's fourth voltage channel is isolated from its first three voltage channels, the instrument can measure power and efficiency across two separate circuits. For example, you can verify the quality of the input (AC) and output (DC) of an EV rapid charger while simultaneously measuring power and efficiency between input and output.



High-precision, wideband, broad-dynamic-range measurement

The PQ3198 delivers the high-end specifications and high reliability needed to capture the full range of power anomalies and analyze the underlying data with a high degree of precision.

International standard IEC 61000-4-30 Ed. 2 Class A compliant



The PQ3198 complies with the IEC 61000-4-30 Ed. 2 Class A standard. As a result, it can perform standard-mandated measurement tasks such as gapless, continuous calculation; detection of events such as swells, dips, and interruptions; and time synchronization using GPS (optional).

Basic measurement accuracy (50/60 Hz)

Voltage	±0.1% of nominal voltage
Current	±0.1% rdg. ±0.1% f.s. + current sensor accuracy
Power	±0.2% rdg. ±0.1% f.s. + current sensor accuracy
Frequency	200ms: ±0.02Hz / 10s: ±0.003Hz

Thanks to basic measurement accuracy that is among the best of any instrument in the industry, the PQ3198 offers high-precision measurement without the need to switch voltage ranges.


Class A

Part of the IEC 61000-4-30 international standard, Class A defines power quality parameters, accuracy, and standard compliance to facilitate the comparison and discussion of measurement results. from different instruments.

High-voltage, wideband performance


The PQ3198 can measure transient voltages of up to 6000 V lasting as little as 0.5 μs (2 MS/s). It can also measure high-order harmonic components from 2 kHz to 80 kHz. As inverters enter into widespread use, malfunctions and failures in that frequency band are becoming more common.

Voltage measurement range

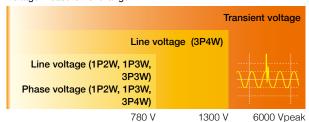

The PQ3198 can measure voltages of all magnitudes using a single range

Voltage frequency band

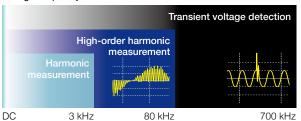

The PQ3198's wideband capability extends from DC voltages to 700 kHz.

Two-circuit measurement

Since the PQ3198's fourth voltage channel is isolated from its first three voltage channels, the instrument can measure power and efficiency across two separate circuits.

Applications

- Simultaneous measurement/monitoring of the primary (AC) and secondary (DC) sides of an EV rapid charger
- Simultaneous measurement/monitoring of the primary (DC) and secondary (AC) sides of a solar power system
- · Simultaneous measurement of the primary (DC) and secondary (AC) sides of a DC/AC (3-phase) inverter
- Simultaneous measurement of the primary and secondary sides of a UPS
- Simultaneous measurement of power supply (AC) and control (DC) circuits
- Simultaneous measurement of a 3-phase line and a ground line
- · Simultaneous measurement of a neutral line to detect ground

*For DC measurement, an AC/DC Auto-Zero Current Sensor is required



400 Hz line measurement


In addition to 50/60 Hz, the PQ3198 can measure a line frequency of 400 Hz.






Simple inverter measurement

The PQ3198 can measure the secondary side of inverters with a fundamental frequency of 40 to 70 Hz and a carrier frequency of up to 20 kHz. It can also measure the efficiency of DC/3-phase inverters.

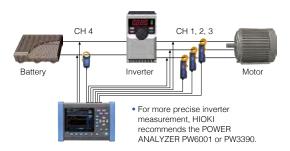

GPS time synchronization

The GPS OPTION PW9005 can be used to correct the instrument's internal time to UTC standard time. This capability eliminates any time difference between instruments to allow analysis that preserves the simultaneity of phenomena measured with multiple instruments.







Measurement functionality and data recording capabilities that ensure you'll capture the full picture with a single measurement

Capture power anomalies reliably with simple settings

The PQ3198 and PQ3100 can measure all parameters at once, including power, harmonics, and anomaly waveforms. The instruments also provide simple setup functionality for automatically configuring recording parameters for popular applications.


Extensive event parameters

Simple, one-touch setup

Capture power supply anomalies reliably


Transient voltages

Capture phenomena characterized by precipitous voltage changes and high peak values caused by lightning or circuit breaker or relay contact issues or tripping.




Voltage swells

Capture phenomena characterized by a momentary rise in voltage, for example due to lightning or power line switching.



Voltage dips

Capture phenomena characterized by a short-duration drop in voltage when a large inrush current occurs, for example due to motor startup.




Interruptions

Capture phenomena characterized by a stoppage in the supply of power, for example when lightning interrupts power or when a power supply shortcircuit trips a circuit breaker.



Frequency fluctuations


Capture frequency fluctuations caused when generator operation becomes unstable due to an abrupt increase or decrease in load.



Simple, one-touch setup

Simple setup functionality for simplified configuration of recording parameters

Simply choose the preset that suits your application, and the instrument will automatically configure the recording parameters.



Capture voltage and frequency anomalies.

Augment the voltage anomaly detection preset by capturing current and harmonic anomalies as well.

Capture inrush current.

Record only time-series data.


EN 50160

Perform measurement based on the EN 50160 standard.

*1: PQ3198 only. *2: This feature is known as "Trends only" for the PQ3100.


Automatic sensor detection to avoid erroneous measurement

Simply connect current sensors, touch "Sensor" on the screen, and the instrument will automatically detect sensor types and




Inrush current

Capture phenomena characterized by a large current that flows momentarily when a device starts up upon receiving power, for example electric equipment and motors.




Harmonics

Capture phenomena characterized by distortions in voltage and current waveforms that are caused by semiconductor control devices




High-order harmonics

Capture phenomena characterized by distortions in voltage and current waveforms caused by noise components from semiconductor control devices such as those used in electronic device power supplies.




Unbalance

Observe voltage and current waveform distortion, voltage dips, and negative-phase-sequence voltage that occur when the loads connected to individual phases in a 3-phase power supply change or when unstable equipment operation increases the load on a specific phase.



Easy-to-understand display of parameters

Since you can switch the display to show all measurement parameters while measurement is underway, it's easy to check conditions. *Screenshot shows the PQ3100 display.

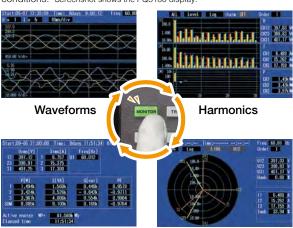

RMS values

Vectors




Simultaneously record event waveforms and trend graphs

Each time it makes a measurement, the PQ3198/PQ3100 records trend data for all parameters. When a power anomaly is detected, an event is recorded. Since the instrument records the maximum, minimum, and average values during the interval, you can rest assured that you won't miss peak values.

Extensive range of recording parameters


Example: Voltage dip

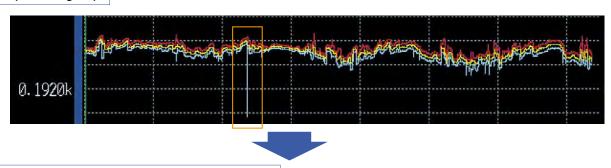

Simultaneous recording of waveforms and trend data

Event waveform

When an event occurs, the instrument records the instantaneous waveform for 0.2 seconds. Triggers can be set for all event parameters in parallel, and you can check recorded data on the display while measurement is in progress.

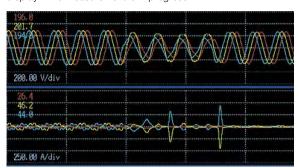

30 sec. event fluctuation trend data

When a voltage swell, dip, or inrush current event occurs, the PQ3198/PQ3100 can simultaneously record 1/2 RMS value fluctuations for 30 seconds.



List of recording parameters

PQ3198 and PQ3100

- Transient voltage
- Voltage 1/2 RMS value
- Voltage waveform peak
- Voltage DC
- Voltage RMS value (phase)
- Voltage RMS value (line)
- Swell
- Dip
- Interruption
- Instantaneous flicker value
- · Current waveform peak
- Current DC · Current RMS value
- Inrush current
- Frequency 1 wave

- Frequency 200 ms
- Frequency 10 s
- Active power
- · Active energy
- Reactive power
- Reactive energy
- Apparent power
- · Power factor/ displacement power factor
- · Voltage reversephase unbalance factor
- Voltage zero-phase unbalance factor
- Current reversephase unbalance
- · Current zero-phase unbalance factor
- Harmonic voltage

- Harmonic current
- · Harmonic power
 - Inter-harmonic voltage
 - Inter-harmonic current
 - · Harmonic voltage phase angle
 - · Harmonic current phase angle
 - Harmonic voltagecurrent phase difference
 - Voltage total
 - harmonic distortion Current total harmonic distortion
 - K factor
 - IEC flicker
 - ΔV10 flicker

PQ3198 only

- Efficiency
- High-order harmonic components
- Voltage waveform comparison

PQ3100 only

- Voltage CF
- Rapid voltage change (RVC)
- Current 1/2 RMS value
- Current CF
- Electricity cost Apparent
- energy Apparent power
 - demand amount

- · Reactive power
- demand amount
- Apparent power
- demand amount Active power
- demand value Reactive power
- demand value Apparent power
- demand value Power factor demand value

Flicker

The PQ3198/PQ3100 can simultaneously measure and record three channels of AV10 or IEC flicker.



Δ-Y, Y-Δ conversion function

When measuring a 3-phase/3-wire (3P3W3M) circuit or a 3-phase/4-wire circuit, the PQ3198/ PQ3100 can switch between phase voltage and line voltage without changing the voltage connections.



Designed to accommodate every possible application so that it's easy to use in all field settings

Clamp sensors for every application

Flexible sensors: Easy installation in confined locations

Flexible current sensors provide a convenient way to measure double- and triple-wired power supplies and in confined locations, with capacities of up to 6000 A.



No need for an external power supply

Since sensor power is supplied by the instrument, there's no need for an AC adapter when using AC/DC sensors or flexible sensors.



Auto-zero sensors: Stable measurement of DC power over extended periods of time

Auto-zero current sensors allow measurement of DC power over extended periods of time, eliminating the need to concern yourself with zero-point drift.



Wide array of ranges to accommodate all applications

Use HIOKI sensors in an array of applications to measure equipment ranging from the secondary side of CTs to high-current wiring. The CT7136 offers three ranges* (5 A/50 A/500 A), as do HIOKI's flexible sensors (50 A/500 A/5000 A). Since the effective measurement range extends to 120% of the nominal range, flexible sensors can be used to measure currents of up to 6000 A. *PQ3100 (PQ3198: 2 ranges [50 A/500 A]).



Delivering both safety and high accuracy

Exceptional safety

The PQ3100 supports CAT III (1000 V*) and CAT IV (600 V) situations, so it can safely measure service drops and distribution panels with a terminal-to-ground voltage of up to 1000 V. *PQ3100 only (PQ3198: CAT IV [600 V])



High accuracy

The PQ3198 complies with IEC 61000-4-30 Ed. 2 Class A, and the PQ3100 with IEC 61000-4-30 Class S, ensuring both instruments' ability to deliver highly reliable, high-precision measurement.

	PQ3198	PQ3100
Voltage RMS value accuracy	±0.1% of nominal voltage	±0.2% of nominal voltage
Swell/dip/interruption	±0.2% of nominal voltage	±0.3% of nominal voltage

Convenient tools

When it's hard to clip leads to terminals

In locations where it's hard to attach alligator clip-style leads to metal terminals, you can replace the tips of the voltage cords with magnetic adapters so that you can more easily detect the voltage.



Magnetic adapters are easy to affix to terminals in confined locations.

Magnetic design (diameter: 11 mm)



Magnetic adapters Red: 9804-01 Black: 9804-02

Secure the PQA to the side of a distribution panel

Use two heavy-duty magnetic straps to attach the instrument to the side or door of a distribution panel.



Magnetic straps can also be used to help keep voltage cords from coming loose.

Heavy-duty type: Z5020 Standard type: Z5004

Extensive range of interfaces

Remote control via Ethernet

Use the PQ3198/PQ3100's HTTP server function to configure and monitor the instrument from a browser. You can also download data using the instrument's FTP server function.



Email notification function*

The instrument can send emails when an event occurs or at a regular time every day. *PQ3100 only



Transfer data to a logger wirelessly*

Pair a data logger (that supports LR8410 Link) to the instrument via Bluetooth® wireless technology to transfer measured values for up to six parameters to the logger. In this way, you can use a single data logger to aggregate measurement data from multiple locations



^{*}PQ3100 only. Connection requires a serial-Bluetooth® wireless technology conversion adapter as recommended by HIOKI. Please contact your HIOKI distributor for more information.

Extended recording times supports permanent installation

Extended recording to an SD memory card

The PQ3198/PQ3100 can record time-series data and event waveforms to an SD memory card. Choose from 2 GB and 8 GB cards.

PQ3198 recording times (when using a 2 GB SD card)

Recording interval	All parameters	Power and harmonics	Power only	Event recording
1 sec.	16 hr.	23 hr.	11 days	Yes
3 sec.	2 days	3 days	34 days	Yes
15 sec.	10 days	14 days	24 weeks	Yes
30 sec.	21 days	29 days	49 weeks	Yes
1 min.	42 days	8 weeks	1 year	Yes
5 min.	30 weeks	42 weeks	1 year	Yes
10 min.	1 year	1 year	1 year	Yes
:	:	:	:	:

PQ3100 recording times (when using a 2 GB SD card)

Recording interval	Without harmonics	With harmonics	Event recording
200 ms	25 hours	No	No
1 sec.	5 days	7 hours	Yes
2 sec.	10 days	14 hours	Yes
10 sec.	53 days	2 days	Yes
1 min.	321 days	17 days	Yes
10 min.	1 year	178 days	Yes
30 min.	1 year	1 year	Yes
	:	:	:




Analyze data and generate reports with HIOKI's PQ ONE power quality analysis software

Standard accessory

Download the latest version from HIOKI's website for free. Sample data from actual instruments is also available for download

Review multiple data sets at a glance Loading measurement data

Group data from different measurement locations, times, and dates into folders and view them together.

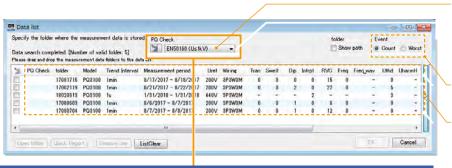


PQ Check function

Automatically check data to see if it complies with power quality standards. (Thresholds can be customized.)

Toggle the display between event counts and worst values.

Display event status and other information in the list of loaded data



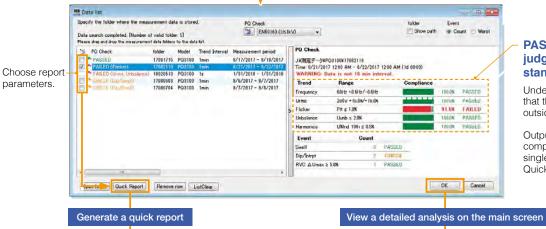


PASS/FAIL judgments for the standard

Understand at a glance that the flicker value falls outside the standard.

Output FAIL (noncompliant) data with a single click using the Quick Report function.

Simple report creation | Quick Report function

Group together trend graphs for multiple data sets and output them as a report. This feature is useful when you wish to compare dates from a repeat recording run or data from multiple locations



Detailed analysis Display a list of analytical data

Display detailed measurement data, including event statistics, an event list, and event graphs. Simply choose the parameters you need to output to the report.



See pages 13 to 15 for more information.

PQ ONE main screen Display a list of detailed information for an individual data set



Select data to load

Load a new data set or choose the most recently used data set.

Option settings

Configure options such as display parameters, language, and cache files.

Verify settings at the time of measurement

Display the status screen with information such as the instrument settings that were in effect at the time of measurement.

Report creation

Generate detailed reports with trend and event information.

CSV file conversion

Output trends and event waveforms as a CSV-format file.

Statistical values and standard values

Display statistical values and perform evaluations and analysis based on standards.

User manual and version information

Review the PQ ONE user manual and software version.

Measured value trend graph

Zoom in and out or use the cursor to display measured values.

Trend graph display interval

Set the interval for which to display trend data on the

Event statistics and ITIC curve

Display bar graphs with data such as the number of events that occurred.

Event list

Display information including the event type, time, duration, and channel.

Detailed event data

Display detailed information about the event selected in the event list.


Features shared by the PQ3198 and PQ3100

Analyze data and generate reports with PQ ONE power quality analysis software

Examples of the types of analyses that can be performed with PQ ONE

Event statistics

Display statistics about events by date or time. This feature makes it easy to discover anomalies that occur at particular times of day or on particular days of the week. In addition, you can perform ITIC (CBEMA) curve analyses (using tolerance curves), which are used by power quality management standards in the U.S.

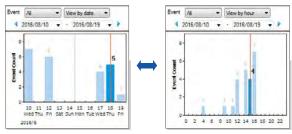


Date-based statistics

Time-based statistics

Event list


Display statistics about events by date or time of day. This feature makes it easy to discover power supply anomalies that occur at particular times of day or on particular days of the week.



Click the event statistics bar graph to display the event list.

ITIC curve


Perform ITIC (CBEMA) curve analyses (using tolerance curves), which are used by power quality management standards in the U.S. This feature lets you display the event duration and worst values for voltage swells, voltage dips, and interruptions.



Example ITIC curve screen

Trend graphs

Display voltage, current, frequency, harmonics, unbalance factor, power, energy, and other data as a time series. Set the display range as desired on the screen and output reports with the shown data. PQ ONE can generate a demand display for the PQ3198, even though that model does not include demand measurement.

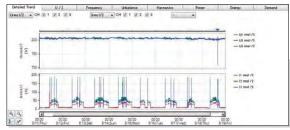


Choose the measurement parameter, channel, or max./min./avg. value.

Event details

Analyze 200 ms event waveforms, including waveforms, harmonics, vector, and numerical displays. You can also display 30 sec. event fluctuation data, transient waveforms, high-order harmonic waveforms*1, high-order harmonic frequency analysis data*1, and 11 sec. waveforms preceding events*2.


*1: PQ3198 only. *2: PQ3100 only

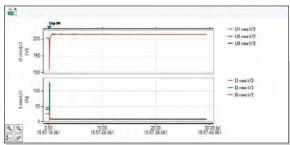

Example voltage dip screen (30 sec. event fluctuation data)

Peak level display

Display a bar graph showing peak values during the voltage harmonic or current harmonic trend display interval. You can check average peak and maximum peak measured values for the period of time selected with the cursor to the right of the graph.

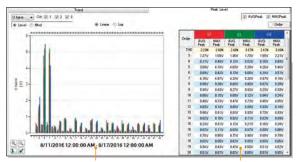


Peak level detection interval

Average peak and maximum peak details

High-order harmonics and frequency analysis display*

Display high-order harmonic event waveforms (2 to 80 kHz) and associated frequency analysis data. By displaying the frequency analysis, you can determine the frequency band in which noise is occurring. *PQ3198 only.

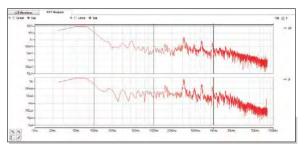

Example high-order harmonics and frequency analysis screen

Statistics display function

Display statistics for voltage, current, frequency, harmonics, flicker, and other parameters on the statistics screen. The software also reports the maximum value (and time at which it occurred), average value, minimum value (and time at which it occurred), 5% value, 50% value, and 95% value for the selected parameter.



Example frequency screen

EN 50160 judgment function

Evaluate whether data complies with the EN 50160 standard by analyzing it and generating a judgment based on voltage fluctuations during the trend interval. You can also customize the judgment criteria and parameters.



Display detailed settings and judgment results

Report creation


Automatically generate reports simply by choosing parameters. You can output reports in Microsoft Word* format, which allows you to add comments later. *Microsoft Word is a product of Microsoft Corporation. N. bertter ber

Choose report parameters

Output a report with only the

CSV conversion and PQDIF output function


Output CSV and PQDIF format files for the parameters you choose. HIOKI plans to add PQDIF input functionality in the next software update.

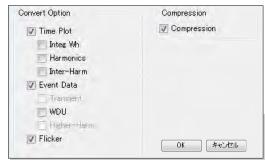

PQDIF output settings screen

Display language

Choose the display language from English, Japanese, and simplified Chinese. HIOK plans to add support for traditional Chinese, Korean, German, French, Italian, Spanish, and Turkish

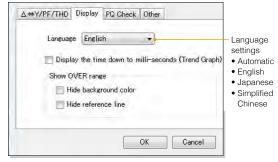

Choose "Automatic" to use the Windows language

16

Connect each measuring

Future update of the PQ3198 scheduled in order to provide compatibility.

HUB instrument to PC with LAN cable Clamp On Power Logger Memory HiLogger Power Quality Analyzer PW3365-20 LR8400

Power maintenance Power Quality **Analyzer**

PQ3100

Power management Energy Consumption

Multi-channel temperature and signal recording **Temperature** Analog Input


Simultaneously monitor all data in real-time

- Connect measuring instruments to PC with LAN cable Operation guaranteed for up to 15 units. Please contact your nearest Hioki distributor for connections exceeding 15.
- Software automatically recognizes LAN-connected measuring instrument
- Display acquired data as graphs in real-time
- Manage and save results with software
- List MAX, MIN and AVG values (Display time of MAX & MIN data)


Compatible instruments	Available iten	ns to monitor and save on PC	Number of items able to be saved	Recording time
POWER QUALITY ANALYZER PQ3100	Voltage	Instantaneous value of each		
CLAMP ON POWER LOGGER PW3365	Current	interval; MAX, MIN, AVG value		When memory size of acquired data reaches to
CLAMP ON POWER LOGGER PW3360	Power	of each interval	Save up to 512 items *Maximum 32 items when	64MB, data will be separated automatically [Continuous measurement]
MEMORY HILOGGER LR8400, LR8401, LR8402		I and a second second second	simultaneously displaying graphs	When storage capacity falls below 512MB,
WIRELESS LOGGING STATION LR8410	Temperature Analog Input	Instantaneous value of each interval	Simulation of the state of the	measurement will stop


Get results from the job site in real-time

Present data from multiple sources as a graph or list together in real-time




- 1. Monitor display (Max 512 items) Display each measured data in real-time
- 2. Graph display (Max 32 items) Display selected data as graphs
- 3. List display (Max 32 items) Display selected data in list





	LEBACO TO	HETE LEASED+17011	IT) FW336-15
1100000	24.83°C	3.625 my	\$KDAY
135417	74.83 °C	3.3805 m/s	96.12.9
19,54.16	24.83 °C	2485 m/.	91.69 9
19/54/11	24.76 °C	0.2545 mV	96.174
19,5434	24.72 °C	2111 eV	BESTY
133413	24.65°C	21275 m/s	9624V
135612	JAST*C	5008 will	96.15V
125411	\$457°C	-EXTENS	MITTY
195430	24,64%	-52875 mV	HL2116
19.5409	ZARI YC	-E.SES-W	95.00 V
195408	\$4.67°C	-0.17K rest	M-12V
135487	24.71 10	-0.581 m/c	36.21 V
103400	24.66°C	-0.064 mil	W-12 V
79,5400	34.75.10	-0.0505 m/V	9623 V
999	2000	~0.5305 wrs	94.39 V
135400	34.7910	stattes.	96.36 V
155402	24.81°C	-6.628 mir	96.63 V
195401	damino.	-0.4595 mV	84.35 V
12:54:00	24.615	-0.8525 mW	90.43 V
min	23.7910	-0.465 mg	\$4.50 V
SMM.	3421%	-0.439 mix	94.43 V
9.99	ZAID °C	-0.903 e-0"	95.25 V
1939-90	pintre	49.4723 HW	96.53%
155535	2434°C	-0.4935 mW	MEN
121254	285	-6.57 mg	98.42V
12:52:33	24.85°C	-0.3283 mV	90.48 V
18:53:52	74.B °C	-0.785 mil	96.61%
195901	24.86°C	4.8125 mV	96,17 V

Display and acquire saved data




CSV output

Export all 512 items at one time and edit it with Microsoft Excel

When memory size of acquired data reaches to 64MB, data will be separated automatically [Continuous measurement]

When storage capacity falls below 512MB, measurement of GENNECT Cross is stopped



Data statistics

See AVG, MAX and MIN values for each saved item at a glance. Times for MAX and MIN data also provided for quick analysis.

Instrument	Comment	Ave		Max			Min	
LR8402=170118751	CHI_I	32.0929563269879	*C	2018-06-12 13:36:47	84.09	,c	2018-06-12 13:54:38	24.53
LR8402*170118751	CH1_2	-0.0415694288913755	mV	2018-06-12 13:44:55	4.222	mV	2018-06-12 13:32:24	-5,6673
LR8402#170118751	CH1_3	-0.0216332596786165	πV	2018-06-12 13:44:55	7.805	mV	2018-06-12 13:32:24	-8.7265
PW3360-11#121101517	U1_Ins(U1_Ins(RM5 volta	96.162674874092	٧	2018-06-12 13:29:05	99.01E-00	٧	2018-06-12 13:46:33	93.94E+0
PW3360-11#121101517	II_Ins(II_Ins(RMS current	24.5272859541126	A	2018-06-12 13:30:22	30.34E+00	А	2018-06-12 13:32:21	12.92E+0
PW5360-11#121101517	P1_ins(P1_ins(Active pow	1.40251639344263	W	2018-06-12 13:27:38	1.108E+00	kW	2018-06-12 13:57:25	2.785E+00

Download GENNECT Cross for Windows

HIOKI website > Technical Support > Drivers, Firmware, Software

Model No. (Order code)

PQ3100 Search

Enter the model number of any one of the compatible Hioki measuring instruments in the search field to download the software to get started!

Interfaces

PQ3198 top



Voltage input terminals (4 channels; channels 1/2/3 and channel 4 are isolated from each other)


terminals (4 channels)

PQ3100 top



terminals (4 channels)

Shared features: Side

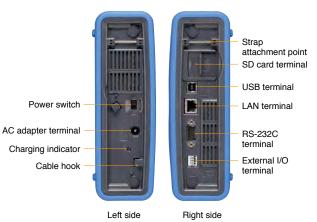

Simple comparison chart

PQ3198 features

The PQ3198 offers an extensive range of event parameters. This model is ideal for use in troubleshootingrelated measurement since it can capture a variety of power supply anomalies. Additionally, it can measure power and efficiency across two circuits carrying different voltages (3-phase and DC, etc.).

PQ3100 features

The PQ3100 offers the QUICK SET function, which makes it easy to generate reliable measurements. Additionally, it can record 11 sec. event waveforms, yielding extended waveforms when anomalies occur. It can also be used in applications such as load rejection testing of solar power systems.

Model		PQ3198	PQ3100			
IEC 61000-4-3	0 standard compliance	Class A	Class S			
Fundamental fi	requency	DC/50 Hz/60 Hz/400 Hz	DC/50 Hz/60 Hz			
Measurement I	ines	1-phase/2-wire, 1-phase/3-wire, 3-phase/3-wire, or 3-phase/4-wire + CH 4				
		Transient, swell, dip, interruption, fred	quency fluctuation, inrush current, THD			
Event parameters	Events that can be measured to capture anomalies	RMS values Voltage/current waveform peak Voltage waveform comparison Harmonics Unbalance factor Power	Rapid voltage change (RVC)			
	Transient voltage	2 MS/s 6 kV	200 kS/s 2.2 kV			
	Efficiency	CH 4 power calculation Efficiency calculation	N/A			
	High-order harmonics	2 kHz to 80 kHz	N/A			
		Power 2-circuit measurement	N/A			
	Power		ver, power factor, displacement power factor, reactive energy			
Measurement parameters	Voltage		alculation), RMS value, waveform peak, DC p-phase), frequency (1-wave/200 ms/10 sec.)			
	Current	Inrush current (half-wave), RMS value, waveform peak, DC value, unbalance (reverse-phase/zero-phase), K factor				
	Harmonics		rent/power, phase angle (voltage/current), al harmonic distortion (voltage/current)			
	Flicker	Pst, Plt, ΔV10 (3-channel s	imultaneous measurement)			
	Inter-harmonics	0.5th order to 49.5th	order, voltage/current			
	Maximum number of recordable events	9999 events ×	366 day repeat			
	Waveform acquired at time of event	200) ms			
Event measurement	Waveform acquired before event	2 waveforms	Max. 1 sec.			
	Waveform acquired after event	Max. 1 sec. (for 5 successive events)	Max. 10 sec.			
	Event statistics processing	N/A	Display of count for each event type and each day			
	CH 1/2/3 and CH 4 isolation	Yes	N/A			
Voltage measurement	Measurement accuracy	High accuracy: ±0.1% rdg.	±0.2% rdg.			
	Maximum rated terminal- to-ground voltage	600 V (CAT IV)	1000 V (CAT III) 600 V (CAT IV)			
Current measurement	Measurement of 4 single-phase circuits	Yes	Yes			
easurernefil	Sensor power supply	Yes	Yes			
Time-series	1 year recording	Yes	Yes			
measurement	Recording interval times	1 sec. to 2 hours	200 ms/600 ms/1 sec. to 2 hours			
Setup assistan	ce	Simplified setup function	QUICK SET (navigation-style assistance from connecting the instrument to the start of recording)			
Battery operati	on	3 hours	8 hours			

Specifications

The following specifications apply when the PQ3198/PQ3100 is set to a measurement frequency of 50/60 Hz. For more detailed specifications, including for when the PQ3198 is set to 400 Hz, please download the user manual from the HIOKI website.

Basic specifications	PQ3198			PQ3100
Number of channels	Voltage: 4 / Current: 4			
Input terminal type Connections		-phase/2-wire -phase/3-wire	tors (HIOKI PL 14) 3-phase/3-wire/2 3-phase/3-wire/3 PQ3100 only 3-phase/4-wire	
nput resistance	Voltage inputs: 4 MΩ / Current inputs: 100 kΩ	phaso, wire, i voluncier i	Voltage inputs: 5 MΩ / Curre	ent inputs: 200 kΩ
Maximum input voltage	Voltage inputs: 1000 V AC, ±600 V DC, 6000 \	/peak	Voltage inputs: 1000 V AC/D	OC, 2200 Vpeak
Maximum rated terminal- o-ground voltage	600 V AC (CAT IV) with an expected transient		overvoltage of 8000 V	/ AC (CAT IV) with an expected transient
Sampling frequency A/D converter resolution	Parameters other than transient voltage: 200 k MHz Parameters other than transient voltage: 16 bit		200 kHz for all parameters 16 bits	
AyD converter resolution	bits	s, transient voltage. 12	TO DIES	
Display range	Voltage: 0.48 V to 780 V / Current: 0.5% to 130 Power: 0.0% to 130% of range Parameters other than above: 0% to 130% of r		Voltage: 2 V to 1300 V / Curr	rent: 0.4% to 130% of range
Effective measurement ranges	Voltage: 10 V to 780 V AC, peak of ±2200 V / Current: 1% to 120% of range, peak of ±400% Power: 0.15% to 130% of range (When voltage and current both fall within the eff	1 V to 600 V DC of range	Current: 5% to 120% of range Power: 5% to 120% of range	
Accuracy specificat	ons			
Accuracy guarantee	Accuracy guarantee duration: 1 year / Post-ad		tee duration: 1 year / Accurac	cy guarantee temperature and humidity
conditions Temperature coefficient	range: 23°C ±5°C, 80% RH or less / Warm-up 0.03% f.s./°C (DC measurement, add ±0.05%		0.1% f.s./°C	
Common-mode voltage	0.03% f.s./°C (DC measurement, and ±0.05% Within 0.2% f.s. (600 Vrms AC, 50 Hz/60 Hz, b	· /		AC, 50 Hz/60 Hz, between voltage input and
effects	enclosure)		enclosure)	
External magnetic field effects	Voltage: Within ±3 V Current: Within 1.5% f.s. (400 Arms/m AC, in 5	0 Hz/60 Hz magnetic field)	Within 1.5% f.s. (400 Arms/n	n AC, in 50 Hz/60 Hz magnetic field)
Measurement paran	neters			
Measurement parameters	Transient voltage Voltage 1/2 RMS value Voltage waveform peak Voltage DC Voltage RMS value (phase) Voltage RMS value (line) Swell Dip Interruption Instantaneous flicker value Current wavefor Current WMS v. Current WS v. Current wavefor Current poc Current poc Current wavefor Current poc Current poc Current wavefor Current wavefor Current poc Current wavefor Current poc Cu	Apparent pov Power factor/ Voltage rever ave Voltage zero- ms Current rever sec. Current zero- Harmonic vol Harmonic cui	wer displacement power factor see-phase unbalance factor phase unbalance factor se-phase unbalance factor phase unbalance factor phase unbalance factor tage rrent	Inter-harmonic voltage Inter-harmonic current Harmonic voltage phase angle Harmonic current phase angle Harmonic voltage-current phase difference Voltage total harmonic distortion Current total harmonic distortion K factor IEC flicker AV10 flicker
	Efficiency High-order harmonic components Voltage waveform comparison		Voltage CF Rapid voltage change (RVC Current 1/2 RMS value Current CF Electricity cost Apparent energy Active power demand amou	Active power demand value Reactive power demand value Apparent power demand value Power factor demand value
Measurement speci				
Transient voltage (Tran)	Detected based on waveform after the fundam	nental wave component has		<u>'</u>
	Measurement range: ±6.000 kVpeak Measurement band: 5 kHz (-3 dB) to 700 kHz Measurement accuracy: ±5.0% rdg. ±1.0% f.s	(-3 dB) s.	Measurement range: ±2.200 Measurement band: 5 kHz (- Measurement accuracy: ±5.	-3 dB) to 40 kHz (-3 dB)
Voltage 1/2 RMS value (Urms1/2), current 1/2 RMS value (Irms1/2)	Voltage 1/2 RMS value: Calculated as the RMS waveform that has been overlapped every half Current 1/2 RMS value: Calculated as the RMS Measurement accuracy	f-wave.	Calculated as the RMS value overlapped every half-wave. Measurement accuracy	e for 1 sampled waveform that has been .
	Voltage: ±0.2% of the nominal voltage (for inpression ±0.2% rdg. ±0.08% f.s. (for input other Current: ±0.3% rdg. ±0.5% f.s. + current sens	er than above) or accuracy	Voltage: ±0.3% of the nomin ±0.2% rdg. ±0.1%	nal voltage (for input of 10 V to 660 V) f.s. (for input other than above) f.s. + current sensor accuracy
Swell (Swell), dip (Dip), interruption (Intrpt)	Detected when the voltage 1/2 RMS value exc Measurement accuracy: Same as voltage 1/2 Fluctuation data: Voltage and current 1/2 RMS	RMS value		
Rapid voltage change (RVC)	None		the threshold; however, if the greater than the swell thresh rather than as an RVC. Measurement accuracy: Sar ΔUss: Absolute difference b RNS values immediat average of voltage 1/2 ΔUmax: Absolute maximum values during the er RMS values immedi	verage of voltage 1/2 RMS values exceeds e average is less than the dip threshold or lold, the event is detected as a dip (or swell) me as voltage 1/2 RMS value letween the 1-sec. average of voltage 1/2 tely before the event and the first 1-sec. 2 RMS values after the event [V] difference between all voltage 1/2 RMS vent and the 1-sec. average of voltage 1/2 iately before the event [V] d current 1/2 RMS value data is saved.
Inrush current (Inrush)	Same as current 1/2 RMS value. Inrush curren setting is exceeded in the positive direction. Measurement accuracy: Same as current 1/2 Fluctuation data: Current 1/2 RMS Value data		current waveform every half- setting is exceeded in the po Measurement accuracy: ±0.	MS value for data obtained by sampling the -wave. Inrush current is detected when the ositive direction. 3% rdg. ±0.3% f.s. + current sensor
			value data	are saved.
Voltage RMS value (Urms), current RMS value (Irms)	Measured using a 200 ms aggregate. Measurement accuracy Voltage: ±0.1% of the nominal voltage (for inp	nan above)	±0.1% rdg. ±0.1%	ggregate. nal voltage (for input of 10 V to 660 V) f.s. (for input other than above) f.s. + current sensor accuracy
Voltage DC value (Udc), current DC value (Idc)	Average of 200 ms aggregate values (calculat Measurement accuracy Voltage: ±0.3% rdg, ±0.08% f.s.		Average of 200 ms aggrega Measurement accuracy Voltage: ±0.3% rdg. ±0.1%	te values
	Current: ±0.5% rdg. ±0.08% f.s. + current sens	or accuracy		r.s. f.s. + current sensor accuracy

Measurement specifications		PQ3198		PQ3100
Voltage waveform peak				imum points in sampled data within 200 ms aggregate
(Upk), current waveform peak (lpk)	Measurement rang Voltage: ±1200.0 \		Measurement rang Voltage: ±2200.0	
podit (ipit)	Current: 400% curr	ent range	Current: 400% cur	rent range
	Measurement accu	racy nominal voltage (for input of 10% to 150% of the	Measurement acc	uracy nominal voltage (for input of 10% to 150% of the
	nominal v	oltage)	nominal v	roltage)
		r input other than above) or input of at least 50% f.s.)	2% f.s. (fo	or input other than above) for input of at least 50% f.s.)
		r input other than above)		or input other than above)
Voltage waveform comparison	Measurement meth	nod: A judgment area is automatically generated based on the previous 200 ms aggregate	None	
Companson		waveform and compared with the judgment		
		waveform to trigger events. Waveform judgment is performed for one 200 ms aggregate at a time.		
	Comparison windo	w width: 10 waves (for 50 Hz input) or 12 waves (for		
	Number of window	60 Hz input)		
	Number of window	points: 4096 points synchronized with harmonic calculations		
Voltage CF value (Ucf), current CF value (Icf)	None		Calculated from th value.	e voltage RMS value and voltage waveform peak
Frequency 1 wave		reciprocal of the cumulative time of the whole cycles th		duration of a single wave on voltage CH 1.
(Freq_wav) Frequency 200 ms		uracy: ±0.200 Hz or less reciprocal of the cumulative time of the whole cycles the	nat occur during 200) ms on voltage CH 1
(Freq)		uracy: ±.0.020 Hz or less	iat occur during zot	on voltage on i.
Frequency 10 sec. (Freq10s)		reciprocal of the cumulative time of the whole cycles the		
(Fleq los)	Measurement accu	uracy: ±0.003 Hz or less (45 Hz or more) ±0.010 Hz or less (less than 45 Hz)	Measurement acc	uracy: ±0.010 Hz or less
Active power (P),	Active power	Measured every 200 ms.	Active power	Measured every 200 ms.
apparent power (S), reactive power (Q)	Apparent power	Calculated from the voltage RMS value and the current RMS value.	Apparent power	RMS value calculation: Calculated from the voltage RMS value and the current RMS value.
. Sastive power (Q)		San San Fried Value.		Fundamental wave calculation: Calculated from the
				fundamental wave active power and the fundamental wave reactive power.
	Reactive power	Calculated from the apparent power S and the active	Reactive power	RMS value calculation: Calculated from the apparent
		power P.		power S and the active power P. Fundamental wave calculation: Calculated from the
	[L.	fundamental wave voltage and current.
	Measurement accu Active power	uracy DC: ±0.5% rdg. ±0.5% f.s. + current sensor	Measurement acc Active power	uracy DC: ±0.5% rdg. ±0.5% f.s. + current sensor
	Active power	accuracy (CH 4 only)	Active power	accuracy (CH 4 only)
		AC: ±0.2% rdg. ±0.1% f.s. + current sensor accuracy		AC: ±0.2% rdg. ±0.1% f.s. + current sensor accuracy
		Power factor effects: 1.0% rdg. or less (for input from		Power factor effects: 1.0% rdg. or less (for input from
	Apparent pauser	40 Hz to 70 Hz with a power factor of 0.5)	Ammarant maurant	40 Hz to 70 Hz with a power factor of 0.5)
		±1 dgt. relative to calculation from measured values During RMS value calculation: ±1 dgt. relative to	Reactive power	±1 dgt. relative to calculation from measured values During RMS value calculation: ±1 dgt. relative to
		calculation from measured values		calculation from measured values
				During fundamental wave calculation: For fundamental frequencies of 45 Hz to 66 Hz
				±0.3% rdg. ±0.1% f.s. + current sensor
				specifications (reactive factor = 1) Reactive factor effects: 1.0% rdg. or less (for input
				from 40 Hz to 70 Hz with a power factor of 0.5)
Efficiency (Eff)	Measurement meth	nod e ratio of the active power values for the channel pair.	None	
		curacy: ±0.1 dgt. relative to calculation from		
Active energy (WP+,		d from the start of recording.	Measurement accu	
WP-), reactive energy (WQ_LAG, WQ_LEAD),		alculated separately from the active power for onsumption and regeneration.		ctive power measurement accuracy ±10 dgt. Reactive power measurement accuracy ±10 dgt.
apparent energy (WS)		Integrated separately from the reactive power for lag		: Apparent power measurement accuracy ±10 dgt.
		and lead. : Integrated from the apparent power. *PQ3100 only		*PQ3100 only accuracy: ±10 ppm
Energy cost (Ecost)	None	. Integrated from the apparent power. FQ3100 only		tiplying active energy (consumption) (WP+) by the
Lifergy Cost (LCost)	None		electricity unit cos	t (/kWh).
			Measurement acc values	uracy: ±1 dgt. relative to calculation from measured
Power factor (PF),		er factor (DPF): Calculated from the fundamental wave	active power and	reactive power.
displacement power factor (DPF)		ulated from the apparent power S and the active power er factor measurement accuracy	er P.	
.actor (Di i)	For input with a v	oltage of 100 V or greater and current of 10% of the ra		
	When displacem	ent power factor = 1: $\pm 0.05\%$ rdg.; when $0.8 \le$ displace $-\cos(\varphi + 0.2865)/\cos(\varphi)) \times 100\%$ rdg. $+50$ dgt. (reference)	cement power factor	r < 1: ±1.50% rdg.; when 0 < displacement power Φ represents the 1st-order display value for the
	harmonic voltage	e-current phase difference	once value), where	Tropresents the 1st order display value for the
Domand amount	Add the current s	sensor phase accuracy to each. PQ3100		
Demand amount	PQ3198 Can be calculated	PQ3100 Energy is measured during each interval. (Value	ae are recorded but	not displayed)
	using PQ ONE.	Measurement accuracy		
		Active power demand amount (Dem_WP+, D		
		Apparent power demand amount (Dem_WS):	Apparent power m	D): Reactive power measurement accuracy ±10 dgt. easurement accuracy ±10 dgt.
		Cumulative time accuracy: ±10 ppm ±1 sec.	(23°C)	
Demand value	Can be calculated using PQ ONE.	Active power demand value (Dem_P+, Dem_P- power demand value (Dem_S)), reactive power de	emand value (Dem_Q_LAG, Dem_Q_LEAD), apparent
	Going I & OINE.	Average power values are measured during ea		
		Measurement accuracy: ±1 dgt. relative to calc		
Power factor demand value measurement	N/A	Calculated from the active power demand value (Dem_Q_LAG).	e (consumption) (De	em_P+) and the reactive power demand value (lag)
specifications		Measurement accuracy: ±1 dgt. relative to calc	ulation from measu	red values
(Dem_PF)	Valtage	factor reverse phase websters () (0) (1)	nboodt = 1	otor // humbo)
Unbalance factor		factor, reverse-phase unbalance factor (Uunb), zero- (3P3W2M, 3P3W3M) and 3-phase/4-wire circuits, calo		
	phases.	(3. 2.72m, 3. 3.73m) and 5 phaso,4-wire circuits, can		
	Measurement accu	<u> </u>	Defined accuracy:	
		factor, reverse-phase current unbalance factor (lunb) (3P3W2M, 3P3W3M) and 3-phase/4-wire circuits, calc		
	phases.	(or orrein, or orrown) and o-phase/4-wire circuits, can	Jaiatou using the lu	maamental carrent component for each of the a
	•			

Measurement specifications	PQ3198	PQ3100
Harmonic voltage	Measurement accuracy	Measurement accuracy
(Uharm), harmonic current (Iharm)	Voltage 0th order: ±0.3% rdg. ±0.08% f.s.	Voltage Oth order: Same as voltage DC value
,	1st order: ±5% rdg. 2nd to 50th order: ±5% rdg. (for input of at least 1% of the nominal input voltage)	1st order: Same as voltage RMS value
	Measurement accuracy	Measurement accuracy
	Current Oth order: ±0.5% rdg. ±0.5% f.s. + current sensor accuracy	Current Oth order: Same as current DC value
	1st to 20th order: ±0.5% rdg. ±0.2% f.s. + current sensor accuracy 21st to 50th order: ±1.0% rdg. ±0.3% f.s. + current sensor accuracy	1st to 20th order: ±0.5% rdg. ±0.2% f.s. + current sensor accuracy 21st to 30th order: ±1.0% rdg. ±0.3% f.s. + current sensor accuracy
	2 1st to solir order. ±1.0 % rag. ±0.5 % i.s. + current sensor accuracy	31st to 40th order: ±2.0% rdg. ±0.3% f.s. + current sensor accuracy
Harmonic power	Displays the harmonic power for each channel as well as the sum of valu	41st to 50th order: ±3.0% rdg. ±0.3% f.s. + current sensor accuracy
(Pharm)	Measurement accuracy	
	Oth order: ±0.5% rdg. ±0.5% f.s. + current sensor accuracy 1st to 20th order: ±0.5% rdg. ±0.2% f.s. + current sensor accuracy	31st to 40th order: ±2.0% rdg. ±0.3% f.s. + current sensor accuracy 41st to 50th order: ±3.0% rdg. ±0.3% f.s. + current sensor accuracy
Hammania mbasa amala	21st to 30th order: ±1.0% rdg. ±0.3% f.s. + current sensor accuracy	(light-sea)
Harmonic phase angle Harmonic voltage-	Harmonic voltage phase angle (Uphase), harmonic current phase angle Measurement accuracy 1st order: ±1° 4th to 50th order: ±(0)	(Ipnase) 0.05° × k + 2°) (k: Harmonic order)
current phase difference (Pphase)		
Inter-harmonic voltage	Adds and displays the inter-harmonic component between whole numbe	er-order harmonic components following harmonic analysis, from the 0.5th
(Uiharm), inter-harmonic current (liharm)	to the 49.5th order.	
Current (iinami)	Measurement accuracy Inter-harmonic voltage (defined for harmonic input with a nominal input	Measurement accuracy Inter-harmonic voltage (defined for harmonic input with a nominal input
	voltage of at least 100 V) Harmonic input of 1% of the nominal input voltage or greater: ±5.0% rdg.	voltage of 100 V to 440 V) Harmonic input of 1% of the nominal input voltage or greater: ±10.0% rdg.
	Harmonic input of less than 1% of the nominal input voltage: ±0.05%	Harmonic input of less than 1% of the nominal input voltage: ±0.05%
	of the nominal input voltage Inter-harmonic current: Accuracy not defined	of the nominal input voltage Inter-harmonic current: Accuracy not defined
Voltage total harmonic	THD-F: Total harmonic distortion relative to wave	
distortion (Uthd), current total harmonic	THD-F: Total harmonic distortion relative to fundamental wave THD-R: Total harmonic distortion relative to total harmonics, including fundamental wave	ndamental wave
distortion (Ithd)	THD-R: Total harmonic distortion relative to total harmonics, including fun Measurement accuracy: 0.5%	ndamental wave
	Defined for input as follows for a nominal input voltage of 100 V to 440 Voltage 1st order: 100% of nominal input voltage / 5th and 7th orders	
	Current 1st order: 100% of current range / 5th and 7th orders: 1% of	
High-order harmonic voltage component	PQ3198	PQ3100
(UharmH), high-order	Measurement method Calculated using the true RMS method and the waveform obtained by eli	
harmonic current component (IharmH)	waves (for a 50 Hz fundamental wave) or 12 waves (for a 60 Hz fundame Sampling frequency: 200 kHz	ntal wave).
	Display parameters High-order harmonic voltage component value: Voltage RMS value for	the waveform obtained by eliminating the fundamental
	wave component	
	High-order harmonic current component value: Current RMS value for t wave component	the waveform obtained by eliminating the fundamental
	High-order harmonic voltage maximum value: Maximum RMS value for fundamental wave component for the interval extending from event IN t	
	High-order harmonic current maximum value: Maximum RMS value for	the current waveform obtained by eliminating the
	fundamental wave component for the interval extending from event IN t High-order harmonic voltage component interval: Interval extending fro	
	event OUT High-order harmonic current component interval: Interval extending fro	m high-order harmonic current component event IN to
	event OUT	g
	Measurement band: 2 kHz to 80 kHz (-3 dB) Measurement accuracy	
	High-order harmonic voltage component: ±10% rdg. ±0.1% f.s. (define High-order harmonic current component: ±10% rdg. ±0.2% f.s. (define	
	Saved waveforms Event waveform, high-order harmonic waveform (8000 points of data or	ver 40 ms starting after the first 200 ms aggregate to
	exceed the threshold)	voi 40 ms starting after the first 200 ms aggregate to
K factor (zoom factor) (KF)	Calculated using the harmonic current RMS values for the 2nd to 50th ord	ders.
Instantaneous flicker value measurement (Pinst)	Measurement method As per IEC 61000-4-15	
IEC flicker (Pst-Plt)	Pst is calculated after measuring continuously for 10 min., while Plt is cal Measurement accuracy: Pst: ±5% rdg. (defined as Class F1 [PQ3198]	
ΔV10 flicker (dV10)	Values calculated using the flicker visibility function curve are converted	
,	ΔV10 1-minute values, 1-hour average value, 1-hour maximum value, 1-ho Measurement accuracy: ±2% rdg. ±0.01 V (with a fundamental wave of 1	ur 4th largest value, overall maximum value (during measurement interval)
	Vrms], and a fluctuation frequency of 10 Hz)	
RMS value frequency	Alarm: Set from 0.00 to 9.99 V to generate contact output if the threshold Frequency Voltage Current Power	Frequency Voltage Current Power
characteristics	40 Hz to 70 Hz Defined by RMS value Defined by RMS value Defined by RMS value	40 Hz to 70 Hz Defined by RMS value Defined by RMS value Defined by active power
	70 Hz to 360 Hz ±1% rdg. ±0.2% f.s. ±1% rdg. ±0.5% f.s. ±1% rdg. ±0.5% f.s.	70 Hz to 1 kHz ±3% rdg. ±0.2% f.s. ±3% rdg. ±0.2% f.s. ±3% rdg. ±0.2% f.s.
	360 Hz to 440 Hz Defined by RMS value Defined by RMS value Defined by RMS value	1 kHz to 10 kHz ±10% rdg. ±0.2% f.s. ±10% rdg. ±0.2% f.s. ±10% rdg. ±0.2% f.s.
	440 Hz to 5 kHz ±5% rdg. ±0.2% f.s. ±5% rdg. ±0.5% f.s. ±5% rdg. ±1% f.s. 5 kHz to 20 kHz ±5% rdg. ±0.2% f.s. ±5% rdg. ±0.5% f.s. ±5% rdg. ±1% f.s.	40 kHz -3 dB -3 dB
	20 kHz to 50 kHz ±20% rdg. ±0.4% f.s. ±20% rdg. ±0.5% f.s.	
	80 kHz -3 dB -3 dB	
Measurement settin	gs	
Current sensor and	See current sensor specifications.	
current range	·	
Power range VT ratio, CT ratio	Determined automatically based on the current range being used. 0.01 to 9999.99	
Nominal input voltage	50 V to 780 V in 1 V increments	50 V to 800 V in 1 V increments
Frequency	50 Hz / 60 Hz / 400 Hz	50 Hz / 60 Hz
Selection of calculation method	Urms: Phase voltage / Line voltage Power factor: PF / DPF	Urms: Phase voltage / Line voltage PF/Q/S: RMS value calculation / Fundamental wave calculation
ouiou	THD: THD-F / THD-R	THD: THD-F / THD-R
	Harmonics: All levels / All content percentages / Content percentages for U and P, levels for I	Harmonics: All levels / All content percentages / Content percentages for U and P, levels for I
Energy cost	N/A	Unit cost: 0.00000 to 99999.9 (per kwh) / Currency unit: 3 alphanumeric characters
Flicker Filter	Pst, Plt / ΔV10 Select Pst or Plt for flicker.	Pst, Plt / ΔV10 / Off

	PQ3198	PQ3100
Recording interval	1/3/15/30 sec., 1/5/10/15/30 min., 1/2 hr., 150 (50 Hz)/180 (60 Hz)/1200 (400 Hz) cycle	200/600 ms, 1/2/5/10/15/30 sec., 1/2/5/10/15/30 min., 1/2 hr., 150/180 cycle
	166 (66 1.2), 166 (66 1.2), 1266 (166 1.2) 6366	*When set to 200/600 ms, harmonic data saving (except total harmonic
		distortion and K factor), event recording, and copy key operation during recording are not available.
Saving of screenshots	Off/On The display screen is saved as a BMP file for each recording interval. Mir	n interval: 5 min
Folder/file names	Not user-configurable	Set to either automatic or user-specified (5 single-byte characters).
Event specifications	· ·	,
Event detection method	The detection method for measured values for each event is noted in the	measurement specifications.
	External events: Events are detected by detecting a signal input to the EV Manual events: Events are detected based on operation of the MANUAL	/ENT IN terminal. EVENT key.
Synchronized saving of events	an event occurs.	Event waveforms: A 200 ms instantaneous waveform is recorded when an event occurs.
	Transient waveform: Instantaneous waveforms are recorded for 2 ms before the transient voltage waveform detection	Transient waveform: Instantaneous waveforms are recorded for 1 ms before the transient voltage waveform detection
	point and for 2 ms after the detection point. Fluctuation data: RMS value fluctuation data is recorded every half-wave	point and 2 ms after the detection point.
	for the equivalent of 0.5 sec. before the event occurs	for the equivalent of 0.5 sec. before the event occurs
	and 29.5 sec. after the event occurs. High-order harmonic waveform: A 40 ms instantaneous waveform is	and 29.5 sec. after the event occurs.
	recorded when a high-order harmonic event occurs.	
Event settings		
Event hysteresis	0% to 100%	
Timer event count	Off, 1/5/10/30 min., 1/2 hr.	Off, 1/2/5/10/15/30 min., 1/2 hr.
Waveforms before	Events are generated at the selected interval. 2 waves	Events are generated at the selected interval. Off (0 sec.) / 200 ms / 1 sec.
events	2 waves	The time for which to record instantaneous waveforms before events occur can be set.
Waveforms after events	Successive events: Off/1/2/3/4/5 The set number of events is repeated each time an event occurs.	Off (0 sec.)/200 ms/400 ms/1 sec./5 sec./10 sec. The time for which to record instantaneous waveforms after events occ
	The set number of events is repeated each time an event occurs.	can be set.
Other functionality		
Copying of screenshots	13 3	at: Compressed BMP
Removal of SD card while recording data	Not supported	A messages is displayed if the user pressed the F key on the FILE screen while recording with a recording interval of 2 sec. or greater; the SD card can be removed once message is reviewed.
Automatic detection of	When selected on the settings screen, connected sensors that support the	e HIOKI PL 14 connector are automatically detected.
current sensors Processing in the event	If the instrument is equipped with a BATTERY PACK Z1003 with a remain	ing charge, the instrument will switch automatically to hattery nower and
of a power outage	continue recording. If no charged BATTERY PACK Z1003 is installed, me start recording again when power is restored. However, integrated values	asurement will stop (settings will be preserved), and the instrument will
Interfaces		
SD memory card	Compatible cards: Z4001, Z4003	
LAN	Remote operation via an Internet browser Manual downloading of data via the FTP server function	Remote operation via an Internet browser Manual downloading of data via the FTP server function Automatic transmission of data via the FTP client function
		Email notifications
USB	USB 2.0 (Full Speed, High Speed), Mass Storage Class	Email notifications
USB RS-232C	USB 2.0 (Full Speed, High Speed), Mass Storage Class Synchronization of clock with GPS (when using GPS BOX PW9005)	Email notifications Acquisition of measurement and settings data via communications commands LR8410 Link support
	Synchronization of clock with GPS (when using GPS BOX PW9005) 4 screwless terminals External event input, external start/stop, external event output (non-	Acquisition of measurement and settings data via communications commands
RS-232C External control	Synchronization of clock with GPS (when using GPS BOX PW9005) 4 screwless terminals External event input, external start/stop, external event output (non-isolated), ΔV10 alarm	Acquisition of measurement and settings data via communications commands LR8410 Link support 4 screwless terminals
RS-232C External control General specificatio	Synchronization of clock with GPS (when using GPS BOX PW9005) 4 screwless terminals External event input, external start/stop, external event output (non-isolated), ΔV10 alarm	Acquisition of measurement and settings data via communications commands LR8410 Link support 4 screwless terminals External event input, external event output (isolated), ΔV10 alarm
RS-232C External control General specificatio Operating location	Synchronization of clock with GPS (when using GPS BOX PW9005) 4 screwless terminals External event input, external start/stop, external event output (non-isolated), ΔV10 alarm ns Indoor use, Pollution Level 2, elevations of up to 3000 m (Measurement category is reduced to CAT III [600 V] at elevations in excess of 2000 m [6561.68 ft].)	Acquisition of measurement and settings data via communications commands LR8410 Link support 4 screwless terminals External event input, external event output (isolated), ΔV10 alarm Indoor use, Pollution Level 2, elevations of up to 3000 m (Measuremen category is reduced to CAT II [1000 V] or CAT III [600 V] at elevations excess of 2000 m [6561.68 ft].)
RS-232C External control General specificatio Operating location Operating temperature	Synchronization of clock with GPS (when using GPS BOX PW9005) 4 screwless terminals External event input, external start/stop, external event output (non-isolated), ΔV10 alarm ns Indoor use, Pollution Level 2, elevations of up to 3000 m (Measurement category is reduced to CAT III [600 V] at elevations in excess of 2000 m	Acquisition of measurement and settings data via communications commands LR8410 Link support 4 screwless terminals External event input, external event output (isolated), ΔV10 alarm Indoor use, Pollution Level 2, elevations of up to 3000 m (Measuremen category is reduced to CAT II [1000 V] or CAT III [600 V] at elevations
RS-232C External control General specificatio Operating location Operating temperature and humidity range Storage temperature	Synchronization of clock with GPS (when using GPS BOX PW9005) 4 screwless terminals External event input, external start/stop, external event output (non-isolated), ΔV10 alarm ns Indoor use, Pollution Level 2, elevations of up to 3000 m (Measurement category is reduced to CAT III [600 V] at elevations in excess of 2000 m [6561.68 ft].) 0°C to 30°C, 95% RH or less (non-condensing)	Acquisition of measurement and settings data via communications commands LR8410 Link support 4 screwless terminals External event input, external event output (isolated), ΔV10 alarm Indoor use, Pollution Level 2, elevations of up to 3000 m (Measuremen category is reduced to CAT II [1000 V] or CAT III [600 V] at elevations excess of 2000 m [6561.68 ft].)
RS-232C External control General specificatio Operating location Operating temperature and humidity range	Synchronization of clock with GPS (when using GPS BOX PW9005) 4 screwless terminals External event input, external start/stop, external event output (non-isolated), ΔV10 alarm ns Indoor use, Pollution Level 2, elevations of up to 3000 m (Measurement category is reduced to CAT III [600 V] at elevations in excess of 2000 m [6561.68 ft].) 0°C to 30°C, 95% RH or less (non-condensing) 30°C to 50°C, 80% RH or less (non-condensing)	Acquisition of measurement and settings data via communications commands LR8410 Link support 4 screwless terminals External event input, external event output (isolated), ΔV10 alarm Indoor use, Pollution Level 2, elevations of up to 3000 m (Measuremen category is reduced to CAT II [1000 V] or CAT III [600 V] at elevations excess of 2000 m [6561.68 ft].)
RS-232C External control General specificatio Operating location Operating temperature and humidity range Storage temperature and humidity range Dustproofness and waterproofness	Synchronization of clock with GPS (when using GPS BOX PW9005) 4 screwless terminals External event input, external start/stop, external event output (non-isolated), ΔV10 alarm 10 11 12 13 14 15 16 17 17 18 18 18 18 18 18 18 18	Acquisition of measurement and settings data via communications commands LR8410 Link support 4 screwless terminals External event input, external event output (isolated), ΔV10 alarm Indoor use, Pollution Level 2, elevations of up to 3000 m (Measurement category is reduced to CAT II [1000 V] or CAT III [600 V] at elevations is excess of 2000 m [6561.68 ft].)
RS-232C External control General specificatio Operating location Operating temperature and humidity range Storage temperature and humidity range Dustproofness and waterproofness Standard compliance	Synchronization of clock with GPS (when using GPS BOX PW9005) 4 screwless terminals External event input, external start/stop, external event output (non-isolated), ΔV10 alarm 10 start/stop, external event output (non-isolated), ΔV10 alarm 11 loor use, Pollution Level 2, elevations of up to 3000 m (Measurement category is reduced to CAT III [600 V] at elevations in excess of 2000 m [6561.68 ft].) 10 cto 30 cto, 95% RH or less (non-condensing) 30 cto 50 cto, 80% RH or less (non-condensing) 10 cto greater than operating temperature and humidity range 11 lp30 (EN 60529) Safety: EN 61010 EMC: EN 61326 Class A	Acquisition of measurement and settings data via communications commands LR8410 Link support 4 screwless terminals External event input, external event output (isolated), ΔV10 alarm Indoor use, Pollution Level 2, elevations of up to 3000 m (Measuremen category is reduced to CAT II [1000 V] or CAT III [600 V] at elevations excess of 2000 m [6561.68 ft].)
RS-232C External control General specificatio Operating location Operating temperature and humidity range Storage temperature and humidity range Dustproofness and waterproofness	Synchronization of clock with GPS (when using GPS BOX PW9005) 4 screwless terminals External event input, external start/stop, external event output (non-isolated), ΔV10 alarm 10 11 12 13 14 15 16 17 17 18 18 18 18 18 18 18 18	Acquisition of measurement and settings data via communications commands LR8410 Link support 4 screwless terminals External event input, external event output (isolated), ΔV10 alarm Indoor use, Pollution Level 2, elevations of up to 3000 m (Measuremen category is reduced to CAT II [1000 V] or CAT III [600 V] at elevations excess of 2000 m [6561.68 ft].)
RS-232C External control General specificatio Operating location Operating temperature and humidity range Storage temperature and humidity range Dustproofness and waterproofness Standard compliance	Synchronization of clock with GPS (when using GPS BOX PW9005) 4 screwless terminals External event input, external start/stop, external event output (non-isolated), ΔV10 alarm NS Indoor use, Pollution Level 2, elevations of up to 3000 m (Measurement category is reduced to CAT III [600 V] at elevations in excess of 2000 m [6561.68 ft].) 0°C to 30°C, 95% RH or less (non-condensing) 30°C to 50°C, 80% RH or less (non-condensing) 10°C greater than operating temperature and humidity range IP30 (EN 60529) Safety: EN 61010 EMC: EN 61326 Class A Harmonics: IEC 61000-4-7, IEC 61000-2-4 Class 3 Power quality: IEC 61000-4-30, EN 50160, IEEE 1159 Flicker: IEC 651000-4-15 AC ADAPTER Z1002 100 V to 240 V AC, 50 Hz/60 Hz; anticipated trans	Acquisition of measurement and settings data via communications commands LR8410 Link support 4 screwless terminals External event input, external event output (isolated), ΔV10 alarm Indoor use, Pollution Level 2, elevations of up to 3000 m (Measurement category is reduced to CAT II [1000 V] or CAT III [600 V] at elevations in excess of 2000 m [6561.68 ft].) -20°C to 50°C, 80% RH or less (non-condensing)
RS-232C External control General specificatio Operating location Operating temperature and humidity range Storage temperature and humidity range Dustproofness and waterproofness Standard compliance Standard compliance	Synchronization of clock with GPS (when using GPS BOX PW9005) 4 screwless terminals External event input, external start/stop, external event output (non-isolated), ΔV10 alarm ns Indoor use, Pollution Level 2, elevations of up to 3000 m (Measurement category is reduced to CAT III [600 V] at elevations in excess of 2000 m [6561.68 ft].) 0°C to 30°C, 95% RH or less (non-condensing) 30°C to 50°C, 80% RH or less (non-condensing) 10°C greater than operating temperature and humidity range IP30 (EN 60529) Safety: EN 61010 EMC: EN 61326 Class A Harmonics: IEC 61000-4-7, IEC 61000-2-4 Class 3 Power quality: IEC 61000-4-30, EN 50160, IEEE 1159 Flicker: IEC 61000-4-15	Acquisition of measurement and settings data via communications commands LR8410 Link support 4 screwless terminals External event input, external event output (isolated), ΔV10 alarm Indoor use, Pollution Level 2, elevations of up to 3000 m (Measuremen category is reduced to CAT II [1000 V] or CAT III [600 V] at elevations excess of 2000 m [6561.68 ft].) -20°C to 50°C, 80% RH or less (non-condensing)
RS-232C External control General specificatio Operating location Operating temperature and humidity range Storage temperature and humidity range Dustproofness and waterproofness Standard compliance Standard compliance Power supply	Synchronization of clock with GPS (when using GPS BOX PW9005) 4 screwless terminals External event input, external start/stop, external event output (non-isolated), ΔV10 alarm 1 Indoor use, Pollution Level 2, elevations of up to 3000 m (Measurement category is reduced to CAT III [600 V] at elevations in excess of 2000 m [6561.68 ft].) 10°C to 30°C, 95% RH or less (non-condensing) 10°C to 50°C, 80% RH or less (non-condensing) 10°C greater than operating temperature and humidity range 1P30 (EN 60529) Safety: EN 61010 EMC: EN 61326 Class A Harmonics: IEC 61000-4-7, IEC 61000-2-4 Class 3 Power quality: IEC 61000-4-30, EN 50160, IEEE 1159 Flicker: IEC 61000-4-15 AC ADAPTER Z1002 100 V to 240 V AC, 50 Hz/60 Hz; anticipated trans adapter) BATTERY PACK Z1003 Charging time: Max. 5 hr. 30 min. Continuous battery operating time: About 3 hr.	Acquisition of measurement and settings data via communications commands LR8410 Link support 4 screwless terminals External event input, external event output (isolated), ΔV10 alarm Indoor use, Pollution Level 2, elevations of up to 3000 m (Measuremen category is reduced to CAT II [1000 V] or CAT III [600 V] at elevations excess of 2000 m [6561.68 ft].) -20°C to 50°C, 80% RH or less (non-condensing) ient overvoltage: 2500 V; maximum rated power: 80 VA (including AC Continuous battery operating time: About 8 hr.
RS-232C External control General specificatio Operating location Operating temperature and humidity range Storage temperature and humidity range Dustproofness and waterproofness Standard compliance Standard compliance Power supply Internal memory Maximum recording	Synchronization of clock with GPS (when using GPS BOX PW9005) 4 screwless terminals External event input, external start/stop, external event output (non-isolated), ΔV10 alarm 1 Indoor use, Pollution Level 2, elevations of up to 3000 m (Measurement category is reduced to CAT III [600 V] at elevations in excess of 2000 m [6561.68 ft].) 10°C to 30°C, 95% RH or less (non-condensing) 30°C to 50°C, 80% RH or less (non-condensing) 10°C greater than operating temperature and humidity range 1P30 (EN 60529) Safety: EN 61010 EMC: EN 61326 Class A Harmonics: IEC 61000-4-7, IEC 61000-2-4 Class 3 Power quality: IEC 61000-4-30, EN 50160, IEEE 1159 Flicker: IEC 61000-4-15 AC ADAPTER Z1002 100 V to 240 V AC, 50 Hz/60 Hz; anticipated trans adapter) BATTERY PACK Z1003 Charging time: Max. 5 hr. 30 min.	Acquisition of measurement and settings data via communications commands LR8410 Link support 4 screwless terminals External event input, external event output (isolated), ΔV10 alarm Indoor use, Pollution Level 2, elevations of up to 3000 m (Measuremen category is reduced to CAT II [1000 V] or CAT III [600 V] at elevations excess of 2000 m [6561.68 ft].) -20°C to 50°C, 80% RH or less (non-condensing) ient overvoltage: 2500 V; maximum rated power: 80 VA (including AC
RS-232C External control General specificatio Operating location Operating temperature and humidity range Storage temperature and humidity range Dustproofness and waterproofness Standard compliance Standard compliance Power supply Internal memory Maximum recording time	Synchronization of clock with GPS (when using GPS BOX PW9005) 4 screwless terminals External event input, external start/stop, external event output (non-isolated), ΔV10 alarm NS Indoor use, Pollution Level 2, elevations of up to 3000 m (Measurement category is reduced to CAT III [600 V] at elevations in excess of 2000 m [6561.68 ft].) O°C to 30°C, 95% RH or less (non-condensing) 30°C to 50°C, 80% RH or less (non-condensing) 10°C greater than operating temperature and humidity range IP30 (EN 60529) Safety: EN 61010 EMC: EN 61326 Class A Harmonics: IEC 61000-4-7, IEC 61000-2-4 Class 3 Power quality: IEC 61000-4-30, EN 50160, IEEE 1159 Flicker: IEC 61000-4-15 AC ADAPTER Z1002 100 V to 240 V AC, 50 Hz/60 Hz; anticipated trans adapter) BATTERY PACK Z1003 Charging time: Max. 5 hr. 30 min. Continuous battery operating time: About 3 hr. N/A 1 year	Acquisition of measurement and settings data via communications commands LR8410 Link support 4 screwless terminals External event input, external event output (isolated), ΔV10 alarm Indoor use, Pollution Level 2, elevations of up to 3000 m (Measuremen category is reduced to CAT II [1000 V] or CAT III [600 V] at elevations excess of 2000 m [6561.68 ft].) -20°C to 50°C, 80% RH or less (non-condensing) ient overvoltage: 2500 V; maximum rated power: 80 VA (including AC Continuous battery operating time: About 8 hr.
RS-232C External control General specificatio Operating location Operating temperature and humidity range Storage temperature and humidity range Dustproofness and waterproofness Standard compliance Standard compliance Power supply	Synchronization of clock with GPS (when using GPS BOX PW9005) 4 screwless terminals External event input, external start/stop, external event output (non-isolated), ΔV10 alarm 1 Indoor use, Pollution Level 2, elevations of up to 3000 m (Measurement category is reduced to CAT III [600 V] at elevations in excess of 2000 m [6561.68 ft].) 10°C to 30°C, 95% RH or less (non-condensing) 10°C greater than operating temperature and humidity range 1 IP30 (EN 60529) 2 Safety: EN 61010 EMC: EN 61326 Class A Harmonics: IEC 61000-4-7, IEC 61000-2-4 Class 3 Power quality: IEC 61000-4-30, EN 50160, IEEE 1159 Flicker: IEC 61000-4-15 AC ADAPTER Z1002 100 V to 240 V AC, 50 Hz/60 Hz; anticipated transadapter) BATTERY PACK Z1003 Charging time: Max. 5 hr. 30 min. Continuous battery operating time: About 3 hr. N/A	Acquisition of measurement and settings data via communications commands LR8410 Link support 4 screwless terminals External event input, external event output (isolated), ΔV10 alarm Indoor use, Pollution Level 2, elevations of up to 3000 m (Measuremen category is reduced to CAT II [1000 V] or CAT III [600 V] at elevations excess of 2000 m [6561.68 ft].) -20°C to 50°C, 80% RH or less (non-condensing) ient overvoltage: 2500 V; maximum rated power: 80 VA (including AC Continuous battery operating time: About 8 hr.
RS-232C External control General specificatio Operating location Operating temperature and humidity range Storage temperature and humidity range Dustproofness and waterproofness Standard compliance Standard compliance Power supply Internal memory Maximum recording time Maximum number of recordable events Time functions	Synchronization of clock with GPS (when using GPS BOX PW9005) 4 screwless terminals External event input, external start/stop, external event output (non-isolated), ΔV10 alarm 1 Indoor use, Pollution Level 2, elevations of up to 3000 m (Measurement category is reduced to CAT III [600 V] at elevations in excess of 2000 m [6561.68 ft].) 10°C to 30°C, 95% RH or less (non-condensing) 10°C greater than operating temperature and humidity range 1P30 (EN 60529) Safety: EN 61010 EMC: EN 61326 Class A Harmonics: IEC 61000-4-7, IEC 61000-2-4 Class 3 Power quality: IEC 61000-4-30, EN 50160, IEEE 1159 Flicker: IEC 61000-4-15 AC ADAPTER Z1002 100 V to 240 V AC, 50 Hz/60 Hz; anticipated trans adapter) BATTERY PACK Z1003 Charging time: Max. 5 hr. 30 min. Continuous battery operating time: About 3 hr. N/A 1 year 9999 Auto-calendar, automatic leap year detection, 24-hour clock	Acquisition of measurement and settings data via communications commands LR8410 Link support 4 screwless terminals External event input, external event output (isolated), ΔV10 alarm Indoor use, Pollution Level 2, elevations of up to 3000 m (Measuremen category is reduced to CAT II [1000 V] or CAT III [600 V] at elevations excess of 2000 m [6561.68 ft].) -20°C to 50°C, 80% RH or less (non-condensing) ient overvoltage: 2500 V; maximum rated power: 80 VA (including AC Continuous battery operating time: About 8 hr. 4 MB
RS-232C External control General specificatio Operating location Operating temperature and humidity range Storage temperature and humidity range Dustproofness and waterproofness Standard compliance Standard compliance Power supply Internal memory Maximum recording time Maximum number of recordable events	Synchronization of clock with GPS (when using GPS BOX PW9005) 4 screwless terminals External event input, external start/stop, external event output (non-isolated), ΔV10 alarm 1 Indoor use, Pollution Level 2, elevations of up to 3000 m (Measurement category is reduced to CAT III [600 V] at elevations in excess of 2000 m [6561.68 ft].) 10°C to 30°C, 95% RH or less (non-condensing) 10°C to 50°C, 80% RH or less (non-condensing) 10°C greater than operating temperature and humidity range 1P30 (EN 60529) Safety: EN 61010 EMC: EN 61326 Class A Harmonics: IEC 61000-4-7, IEC 61000-2-4 Class 3 Power quality: IEC 61000-4-30, EN 50160, IEEE 1159 Flicker: IEC 61000-4-15 AC ADAPTER Z1002 100 V to 240 V AC, 50 Hz/60 Hz; anticipated trans adapter) BATTERY PACK Z1003 Charging time: Max. 5 hr. 30 min. Continuous battery operating time: About 3 hr. N/A 1 year	Acquisition of measurement and settings data via communications commands LR8410 Link support 4 screwless terminals External event input, external event output (isolated), ΔV10 alarm Indoor use, Pollution Level 2, elevations of up to 3000 m (Measuremen category is reduced to CAT II [1000 V] or CAT III [600 V] at elevations excess of 2000 m [6561.68 ft].) -20°C to 50°C, 80% RH or less (non-condensing) ient overvoltage: 2500 V; maximum rated power: 80 VA (including AC Continuous battery operating time: About 8 hr. 4 MB
RS-232C External control General specificatio Operating location Operating temperature and humidity range Storage temperature and humidity range Dustproofness and waterproofness Standard compliance Standard compliance Power supply Internal memory Maximum recording time Maximum number of recordable events Time functions	Synchronization of clock with GPS (when using GPS BOX PW9005) 4 screwless terminals External event input, external start/stop, external event output (non-isolated), ΔV10 alarm 1 Indoor use, Pollution Level 2, elevations of up to 3000 m (Measurement category is reduced to CAT III [600 V] at elevations in excess of 2000 m [6561.68 ft].) 10°C to 30°C, 95% RH or less (non-condensing) 10°C greater than operating temperature and humidity range 1P30 (EN 60529) Safety: EN 61010 EMC: EN 61326 Class A Harmonics: IEC 61000-4-7, IEC 61000-2-4 Class 3 Power quality: IEC 61000-4-30, EN 50160, IEEE 1159 Flicker: IEC 61000-4-15 AC ADAPTER Z1002 100 V to 240 V AC, 50 Hz/60 Hz; anticipated trans adapter) BATTERY PACK Z1003 Charging time: Max. 5 hr. 30 min. Continuous battery operating time: About 3 hr. N/A 1 year 9999 Auto-calendar, automatic leap year detection, 24-hour clock	Acquisition of measurement and settings data via communications commands LR8410 Link support 4 screwless terminals External event input, external event output (isolated), ΔV10 alarm Indoor use, Pollution Level 2, elevations of up to 3000 m (Measuremen category is reduced to CAT II [1000 V] or CAT III [600 V] at elevations excess of 2000 m [6561.68 ft].) -20°C to 50°C, 80% RH or less (non-condensing) ient overvoltage: 2500 V; maximum rated power: 80 VA (including AC Continuous battery operating time: About 8 hr. 4 MB
RS-232C External control General specificatio Operating location Operating temperature and humidity range Storage temperature and humidity range Dustproofness and waterproofness Standard compliance Standard compliance Power supply Internal memory Maximum recording time Maximum number of recordable events Time functions Real time accuracy	Synchronization of clock with GPS (when using GPS BOX PW9005) 4 screwless terminals External event input, external start/stop, external event output (non-isolated), ΔV10 alarm 1 Indoor use, Pollution Level 2, elevations of up to 3000 m (Measurement category is reduced to CAT III [600 V] at elevations in excess of 2000 m [6561.68 ft].) 10°C to 30°C, 95% RH or less (non-condensing) 30°C to 50°C, 80% RH or less (non-condensing) 10°C greater than operating temperature and humidity range 1P30 (EN 60529) Safety: EN 61010 EMC: EN 61326 Class A Harmonics: IEC 61000-4-7, IEC 61000-2-4 Class 3 Power quality: IEC 61000-4-30, EN 50160, IEEE 1159 Flicker: IEC 61000-4-15 AC ADAPTER Z1002 100 V to 240 V AC, 50 Hz/60 Hz; anticipated trans adapter) BATTERY PACK Z1003 Charging time: Max. 5 hr. 30 min. Continuous battery operating time: About 3 hr. N/A 1 year 9999 Auto-calendar, automatic leap year detection, 24-hour clock Within ±0.3 sec./day (with instrument powered on at 23°C ±5°C)	Acquisition of measurement and settings data via communications commands LR8410 Link support 4 screwless terminals External event input, external event output (isolated), ΔV10 alarm Indoor use, Pollution Level 2, elevations of up to 3000 m (Measuremen category is reduced to CAT II [1000 V] or CAT III [600 V] at elevations excess of 2000 m [6561.68 ft].) -20°C to 50°C, 80% RH or less (non-condensing) ient overvoltage: 2500 V; maximum rated power: 80 VA (including AC Continuous battery operating time: About 8 hr. 4 MB Within ±0.5 sec./day (with instrument powered on and within operating temperature range) an / French / Italian / Spanish / Turkish / Polish

_	_	AC CURRENT SENSOR	AC CURRENT SENSOR	AC CURRENT SENSOR				
Model		CT7126	CT7131	CT7136				
Appearance				91				
Rated measured current		60 A AC	100 A AC	600 A AC				
Measurable wire diameter		15 mm (0.5	59 in.) or less	46 mm (1.81 in.) or less				
Current range and combined amplitude accuracy (45 to 66 Hz) *Accuracy guaranteed up to 120% of range.		Current range Combined accuracy 50.000 A 0.4% rdg. + 0.112% f.s. 5.0000 A 0.4% rdg. + 0.22% f.s. 500.00 mA 0.4% rdg. + 1.3% f.s. [*2]	100.00 A 0.4% rdg. + 0.12% f.s. 50.000 A 0.4% rdg. + 0.14% f.s.	Current range Combined accuracy 500.00 A 0.4% rdg. + 0.112% f.s. 50.000 A 0.4% rdg. + 0.22% f.s. 5.0000 A 0.4% rdg. + 1.3% f.s. [*2]				
Phase accuracy (45 to 66 Hz)		Within ±2°	Within ±1°	Within ±0.5°				
Maximum allowable to 66 Hz)	e input (45	60 A continuous	130 A continuous	600 A continuous				
Maximum rated terr ground voltage	minal-to-	CAT II	CAT III (1000 V), CAT IV (600 V)					
Frequency band								
Dimensions / weight / cord length		46 mm (1.81 in.) (W) × 135 mm (5.31 2.5 m	78 mm (3.07 in.) (W) × 152 mm (5.98 in.) (H) × 42 mm (1.65 in.) (D) / 350 g / 2.5 m (8.20 ft.)					
Model		AC FLEXIBLE CURRENT SENSOR CT7044 AC FLEXIBLE CURRENT SENSOR CT7045		AC FLEXIBLE CURRENT SENSOR CT7046				
Appearance								
Rated measured current			6000 A AC					
Measurable wire dia	ameter	100 mm (3.94 in.) or less	180 mm (7.09 in.) or less	254 mm (10.00 in.) or less				
Current range and combined amplitude accuracy (45 to 66 Hz) *Accuracy guaranteed up to 120% of range.		Current range Combined amplitude accuracy 5000.0 A/500.00 A 1.6% rdg. + 0.4% f.s. 50.000 A 1.6% rdg. + 3.1% f.s.						
Phase accuracy (45	5 to 66 Hz)	Within ±1.0°						
Maximum allowable to 66 Hz)	e input (45	10,000 A continuous						
Maximum rated terr ground voltage	minal-to-	1000 V AC (CAT III), 600 V AC (CAT IV)						
Frequency band			10 Hz to 50 kHz (within ±3 dB)					
Dimensions / cord I	ength		Flexible loop cross-sectional diameter: 7.4 mm (0.29 in.) / 2.5 m (8.20 ft.)					
Weight		160 g	180 g	190 g				
Model		AC/DC AUTO-ZERO CURRENT SENSOR CT7731	AC/DC AUTO-ZERO CURRENT SENSOR CT7742					
Appearance		91	\$ \	% \				
Rated measured cu	urrent	100 A AC/DC	600 A AC/DC	2000 A AC/DC				
Measurable wire dia	ameter	33 mm (1.30 in.) or less		55 mm (2.17 in.) or less				
Current range and combined amplitude accuracy *Accuracy guaranteed up to 120% of range.	DC	Current range Combined accuracy 100.00 A 1.5% rdg. + 1.0% f.s. 50.000 A 1.5% rdg. + 1.5% f.s. [*1] 10.000 A 1.5% rdg. + 5.5% f.s. [*2]	Current range Combined accuracy 500.00 A 2.5% rdg. + 1.1% f.s. 50.000 A 2.5% rdg. + 6.5% f.s.	Current range Combined accuracy 5000.0 A 2.0% rdg. + 0.7% f.s. [*1] 2000.0 A 2.0% rdg. + 1.75% f.s. [*2] 1000.0 A 2.0% rdg. + 1.5% f.s. [*2] 500.00 A 2.0% rdg. + 2.5% f.s.				
	45 to 66 Hz	100.00 A 1.1% rdg. + 0.6% f.s. 50.000 A 1.1% rdg. + 1.1% f.s. [*1] 10.000 A 1.1% rdg. + 5.1% f.s. [*2]	500.00 A 2.1% rdg. + 0.7% f.s. 50.000 A 2.1% rdg. + 6.1% f.s.	5000.0 A [*1] I > 1800 A: 2.1% rdg. + 0.3% f.s. I ≤ 1800 A: 1.6% rdg. + 0.3% f.s. 2000.0 A 1.6% rdg. + 0.75% f.s. [*2] 1000.0 A 1.6% rdg. + 1.1% f.s. [*2] 500.00 A 1.6% rdg. + 2.1% f.s.				
Phase accuracy (45 to 66 Hz)		Within ±1.8°		Within ±2.3°				
Offset drift		Within ±0.5% f.s.	Within ±0.1% f.s.	Within ±0.1% f.s.				
Maximum allowable input (45 to 66 Hz)		100 A continuous	600 A continuous	2000 A continuous				
Maximum rated terminal-to- ground voltage		600 V AC/DC (CAT IV)	600 V AC/DC (CAT IV) 1000 V AC/DC (CAT III					
Frequency band		DC to 5 kHz (-3 dB)		T				
Dimensions / weight / cord length		58 mm (2.28 in.) (W) × 132 mm (5.20 in.) (H) × 18 mm (0.51 in.) (D) / 250 g / 2.5 m (8.20 ft.)	64 mm (2.52 in.) (W) × 160 mm (6.30 in.) (H) × 34 mm (1.34 in.) (D) / 320 g / 2.5 m (8.20 ft.)	64 mm (2.52 in.) (W) × 195 mm (7.68 in.) (H) × 34 mm (1.34 in.) (D) / 510 g / 2.5 m (8.20 ft.)				

Model	AC LEAK CURRENT SENSOR CT7116			
Appearance	Designed specifically for leak current measurement For use with insulated conductors			
Rated measured current	6 A AC			
Measurable conductor diameter	40 mm or less (insulated conductor)			
Current range and combined amplitude accuracy (45 to 66 Hz)	Current range Combined accuracy 5.0000 A 1.1% rdg. + 0.16% f.s. 500.00 mA 1.1% rdg. + 0.7% f.s. 50.000 mA 1.1% rdg. + 6.1% f.s. [*2]			
Phase accuracy (45 to 66 Hz)	Within ±3°			
Frequency band	40 Hz to 5 kHz (±3.0% rdg. ±0.1% f.s.)			
Residual current characteristics	5 mA or less (for a pair of round-trip wires carrying 100 A)			
External magnetic field effects	5 mA equivalent, max. 7.5 mA (400 A/m, 50/60 Hz)			
Dimensions / weight / cord length	74 mm (2.91 in.) (W) × 145 mm (5.71 in.) (H) × 42 mm (1.65 in.) (D) / 340 g / 2.5 m (8.20 ft.)			

Option for connecting legacy current sensor models



CONVERSION CABLE L9910

Output connector conversion: BNC → PL 14

Use by connecting to one of the following legacy sensor models:

CLAMP ON SENSOR 9694/9660/9661/9669

AC FLEXIBLE CURRENT SENSOR CT9667-01/CT9667-02/CT9667-03 *Conversion cable does not supply power to the sensor.

CLAMP ON LEAK SENSOR 9657-10/9675

Current sensor options



EXTENSION CABLE L0220-01 2 m (6.56 ft.)

EXTENSION CABLE L0220-02 5 m (16.50 ft.)

EXTENSION CABLE L0220-03 10 m (32.81 ft.)

Voltage measurement options

HIOKI provides quotations for voltage cord extensions, terminal connector conversions, and other options on a case-by-case basis. Please contact your HIOKI distributor for details.



MAGNETIC ADAPTER 9804-01 $(red \times 1)$ MAGNETIC ADAPTER 9804-02 (black × 1)

Use as a replacement for L1000-05.

GRABBER CLIP 9243





OUTLET TEST LEAD L1020 For Japan (3-prong, P/N/E), cord length of 2 m (6.56 ft.) *Please contact HIOKI for cords for use in countries other than Japan.

PATCH CORD L1021-01 (red × 1) PATCH CORD L1021-02 (black × 1) Banana branch to banana clip, red \times 1, cord length of 0.5 m (1.64 ft.), use to branch L9438s or L1000s, CAT IV (600 V)/CAT III (1000 V)

Interfaces



SD MEMORY CARD (2 GB) Z4001



SD MEMORY CARD (8 GB) Z4003



9637 9 pin to 9 pin 1.8 m (5.91 ft.) Cross cable



9642 Straight or cross Comes with conversion adapter. 5 m (16.40 ft.)

Carrying cases and waterproof boxes

About SD memory cards

Be sure to use genuine HIOKI SD memory cards with

HIOKI instruments. Use of other SD memory cards may

prevent data from being properly saved or loaded as

proper operation is not guaranteed.



CARRYING CASE C1009 Bag-style case



CARRYING CASE C1001 Soft case



CARRYING CASE C1002 Hard case



Waterproof box For outdoor installation IP65

PQ3198 options

Magnetic straps



WIRING ADAPTER PW9000

MAGNETIC STRAP Z5004

MAGNETIC STRAP Z5020

Heavy-duty type

Allows the instrument to be connected to a 3-phase/3-wire circuit with 3 voltage cords instead of 6.



WIRING ADAPTER PW9001

Allows the instrument to be connected to a 3-phase/4-wire circuit with 4 voltage cords instead



GPS BOX PW9005

Corrects the instrument's internal clock based on UTC.

Standard accessories (also available for separate purchase)



VOLTAGE CORD L1000

Comes with the PQ3198. 8 cords (black × 4; red, yellow, blue, and gray × 1 each)

8 alligator clips Cord length: 3 m (9.84 ft.)



VOLTAGE CORD L1000-05

Comes with the PQ3100. 5 cords (black, red, yellow, blue, and gray × 1 each) 5 alligator clips Cord length: 3 m (9.84 ft.)



AC ADAPTER Z1002 100 V to 240 V AC



BATTERY PACK Z1003 7.2 V, Ni-MH



Models

Product name POWER QUALITY ANALYZER PQ3198

Model (order code)	PQ3198	PQ3198-92 PQ3198-94	PQ3198-94	
	- Annual Control of the Control of t	POWER QUALITY ANALYZER PQ3198 VOLTAGE CORD L1000 Color clips Measurement guide AC ADAPTER Z1002 Spiral tubes PQ ONE (software CD) BATTERY PACK Z1003 Strap SD MEMORY CARD Z4001 USB cable User manual		
Bundle contents	_	AC CURRENT SENSOR CT7136 (x4) AC FLEXIBLE CURRENT CT7045 (x4)	SENSOR	
	_	CARRYING CASE C1009 PATCH CORD L1021-02 (x3)		

Product name POWER QUALITY ANALYZER PQ3100

Model (order code)	PQ3100	PQ3100-91	PQ3100-92	PQ3100-94	
		POWER QUALITY ANALYZER PQ3100 VOLTAGE CORD L1000-05 Color clips Measurement guide AC ADAPTER Z1002 Spiral tubes PQ ONE (software CD) BATTERY PACK Z1003 Strap USB cable User manual		•	
Bundle contents	_	AC CURRENT SENSOR CT7136 (×2)	AC CURRENT SENSOR CT7136 (×4)	AC FLEXIBLE CURRENT SENSOR CT7045 (x4)	
	-	CARRYING CASE C1009 SD MEMORY CARD Z4001			

No-metal-contact

Related products



values by time interval for parameters including voltage, current, power, frequency, and harmonics.



- Ascertain transient current when power equipment starts up.
- Simultaneously measure RMS values and maximum crest values for inrush current.