

**TRACEABLE®
GIANT-DIGITS™
ATOMIC CLOCK
WITH INDOOR
TEMPERATURE
INSTRUCTIONS**

Cat. No. 1088


Traceable® and Giant-Digits™ Atomic Clock are registered trademarks/trademarks of Cole-Parmer.

©2020 Traceable® Products. 92-1088-00 Rev. 1 041720

Traceable® Products is ISO 9001:2018 Quality-
Certified by DNV and ISO/IEC 17025:2017
accredited as a Calibration Laboratory by A2LA.

PRODUCT OVERVIEW

CLOCK

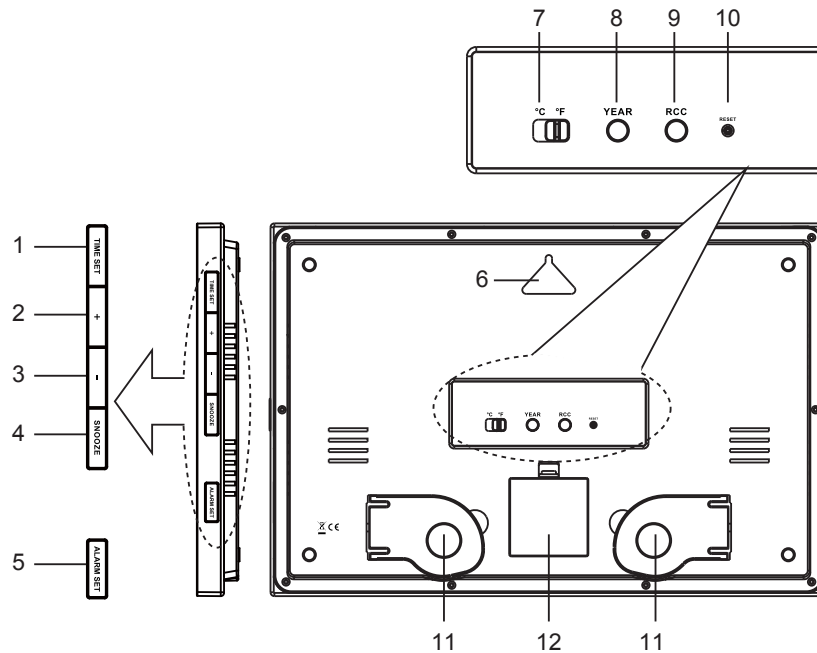


1. [TIME SET] button
2. [+] button
3. [-] button
4. [SNOOZE] button
5. [ALARM SET] button
6. Wall-mounting hole

7. < °C/°F > slide switch
8. [YEAR] button
9. [RCC] button
10. [RESET] button
11. Table stand
12. Battery door

DISPLAY


Normal time mode

1. AM/PM (12 Hour format)
2. Time
3. Low battery indicator
4. DST
5. Signal strength indicator
6. Month-Date / Year
7. Weekday
8. Temperature
9. Humidity
10. Time zone indicator

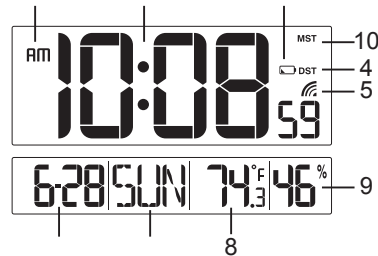

Alarm time mode

1. Alarm time
2. Alarm icon/Alarm on
3. Alarm mode indicator



GETTING STARTED

- Remove the battery door.
- Insert 4 new AA size batteries according to the “+/-” polarity mark on the battery compartment.
- Replace the battery door.
- Once the batteries are inserted, full segment of the LCD will be shown before entering the radio controlled time reception mode.
- The RC clock will automatically start scanning for the radio controlled time signal in 8 seconds.

NOTE:


If no display appears on the LCD after inserting the batteries, press the [**RESET**] button by using a metal wire. In some cases, you may not receive the signal immediately. Due to the atmospheric disturbance, the best reception often occurs during nighttime.

DAYLIGHT SAVING TIME (DST)

The clock will automatically advance the time by one hour in the spring and back an hour in the fall, provided that the DST function is not turned off. DST function is set to AUTO by default.

RECEPTION OF RADIO CONTROLLED SIGNAL

This RC clock includes a built-in receiver which picks up the signal from the WWVB station. Therefore, the clock automatically sets the time, date and weekday.




- The clock automatically carries out four periodic synchronization procedures (at 2:00 AM, 8:00 AM, 2:00 PM and 8:00 PM daily) with the RC signal to correct any deviations to the exact time.
- Once the unit synchronizes successfully to the RC signal, the signal icon “” will show up. Each synchronization process will take between 6 to 16 minutes.
- To manually start or stop the RC signal reception, press [**RCC**] button.

NOTE:

- The strength of radio-controlled time signal from the transmitter tower may be affected by geographical location or building around.
- Always place the unit away from interfering sources such as TV set, computer, etc.
- Avoid placing the unit on or next to metal plates.
- Closed areas such as airport, basement, tower block, or factory are not recommended.

SIGNAL RECEPTION INDICATOR

The signal indicator displays signal strength in 4 levels. Wave segment flashing means time signals are being received. The signal quality could be classified into 4 types:

- No signal quality
-  Weak signal quality
-  Acceptable signal quality
-  Excellent signal quality


TIME ZONE SETTING

Your clock is designed to display time for different time zones. Please refer to the **SETTING THE TIME AND CALENDAR** section to set your desired time zone in following order:

PST (Pacific) → **MST** (Mountain) → **CST** (Central) → **EST** (Eastern) → **AST** (Alaska) → **NST** (Northern)

DISABLE / ENABLE RCC SIGNAL RECEPTION

- Press and hold [**RCC**] button for 8 seconds to disable the reception.
- Press and hold [**RCC**] button for 8 seconds to enable automatic RCC reception.

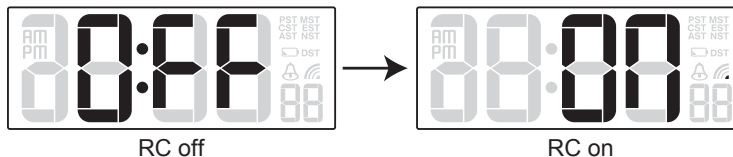

SETTING THE TIME AND CALENDAR

- In normal time mode, press and hold [**TIME SET**] button for 2 seconds until the 12/24 Hr flashes.
- Press [+/-] button to set 12/24 Hour format.
- Press [**TIME SET**] button again until Hour digit flashes and press [+/-] button to adjust its value.
- Repeat above operations to set the time and calendar in this sequence:

WWVB version:

12/24Hr>Time Zone>Hour>Minute>Second>Year>Month>Date>
+/-23 Hour offset>Language>DST auto/off

- Press [**TIME SET**] button to save the setting and return to normal time mode. Or the clock will automatically exit the setting mode after 1 minute without pressing any button.

NOTE:

- When setting second, press [+/-] button to set its value to 00.
- 7 selectable languages and setting orders: **EN**(English) → **FR**(French) → **DE**(German) → **ES**(Spanish) → **IT**(Italian) → **NL**(Dutch) → **RU**(Russian)

SETTING THE ALARM TIME

- In normal time mode, press and hold [**ALARM SET**] button for 2 seconds until Hour digit flashes.
- Press [+/-] button to set its value.
- Press [**ALARM SET**] button again to step to Minute setting. Press [+/-] button to set its value.
- Press [**ALARM SET**] button to save the setting and return to normal time mode. Or the clock will automatically exit the setting mode after 1 minute without pressing any button.

NOTE:

After pressing [+/-] button, alarm function is automatically turned on (icon “⏰” displayed).

USING THE ALARM AND SNOOZE

- In normal time mode, press [**ALARM SET**] button to enter alarm time mode. Press [**ALARM SET**] button again to turn on (icon “⏰” displayed) or turn off alarm function.

If alarm is turned on, alarm beeps at the alarm time.

Alarm beeping can be stopped by:

- Auto stop if no button is pressed during alarm sound beeping. Alarm beeping lasts for 2 minutes.
- Press [**SNOOZE**] button to stop the current alarm and enter snooze. Alarm icon will be flashing continuously. The alarm will sound again in 5 minutes. Snooze can be operated continuously in 24 hours.
- Press [**ALARM**] button to turn off alarm function.

VIEW YEAR

In normal time mode, press [**YEAR**] button to display Year for 5 seconds.


TEMPERATURE AND HUMIDITY DISPLAY

Slide the **<°C/°F>** switch to select the temperature unit °C or °F.

The temperature and humidity will display “**Hi/Lo/---**” on the conditions in the following chart:

Area	Condition	Display
Temperature	Temperature<-40°C	Lo
	Temperature>70°C	HI
Humidity	Humidity<20%	Lo
	Humidity>90%	HI
	Temperature<0°C or >60°C	---

BATTERY REPLACEMENT

When the low battery indicator “” displays, it indicates that the battery power is not enough. You should replace with 4 AA size batteries at once.

NOTE:

- If the clock is not used for a long time, please take off the batteries.
- Attention! Batteries should not be exposed to excessive heat such as sunshine, fire or the like. Please dispose of used unit or batteries in an ecologically safe manner.



SPECIFICATIONS

Radio controlled signal: WWVB

TEMPERATURE

Display range: -40°C~70°C (-40°F~158°F)

Operating range: 0°C~45°C (32°F~113°F)

Accuracy:

-5°C~-0.1°C:	+/-2°C
0°C~40°C:	+/-1°C
40.1°C~50°C:	+/-2°C
(23°F~32°F:	+/-4°F
33°F~86°F:	+/-2°F
87°F~122°F:	+/-4°F)

HUMIDITY

Display range: 20%~90%

Accuracy:

20% RH~40% RH:	+/-7% RH
41% RH~70% RH:	+/-5% RH
71% RH~90% RH:	+/-7% RH

POWER

4 x AA size 1.5V batteries (Alkaline recommended)

DIMENSION

430(L) x 288(H) x 33(D) mm