

120V AC CIRCUIT BREAKER FINDER

W/FLASHLIGHT, NCVT & GFCI RECEPTACLE TESTER

- cULus Certified (UL 1436, CSA C22.2 No. 160), CAT II 150V
- Quickly and easily identifies circuit breakers/fuses without disrupting power on energized 120V AC circuits
- Clear Visual and Audible indicators (Audible can be muted)
- NCVT in receiver tip indicates presence of AC voltage between 80-300V AC
- Flashlight in receiver operates independently of the tester functions and can be used to illuminate work area
- Transmitter tests outlet wiring configurations (indicated via Green/Red LEDs) and tests GFCIs
- Receiver powers off automatically after 5 minutes of non-use to conserve battery life



Narrower Tip
improves breaker
identification accuracy

LED Flashlight
operates independently
and illuminates work area

Transmitter
sends a signal over the conductors when
connected to an energized circuit. It also
identifies the presence of power and
indicates correct/incorrect wiring con-
ditions via illuminated Green and Red
LED's. A GFCI test light illuminates
when the GFCI Test button is pressed,
indicating the activation of the GFCI
test. The GFCIs will trip if they are
functioning properly



NOTE: Receptacle MUST be properly
grounded for the GFCI test to
work properly.

NOTE: The transmitter works on
LIVE/Energized circuits only


Receiver
powers off automatically after
five minutes of non-use to
conserve battery life

Lanyard Mount

NCVT
in receiver tip indicates presence
of AC voltage between 80-300 volts
(visual flashing red LEDs
& audible indicators)



Receiver
reads the transmitter's signal
and identifies the breaker/
finder energizing the circuit
by illuminating a flashing
green LED and emitting
beeps once it determines
the breaker/fuse
with the strongest signal.




**LED
Flashlight**

Audible Defeat
for noise
sensitive areas

On/Off toggles
between circuit breaker
finding and NCVT functions
(default circuit breaker
finding)

61-535
120V AC Circuit Breaker Finder
w/Flashlight, NCVT & GFCI
CAT II 150V | cULus Listed

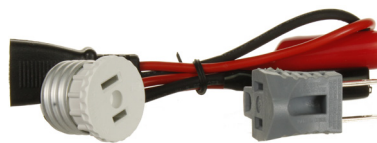

TL-532A
Test Lead & Adapter KIT (sold separately)



SCAN
to learn more

THE ELECTRICIAN'S
CHAMPION **IDEAL**



www.calcert.com

sales@calcert.com

1.888.610.7664

120V AC CIRCUIT BREAKER FINDER

W/FLASHLIGHT, NCVT & GFCI RECEPTACLE TESTER

NEW



SCAN
to learn more



61-535
Receiver

61-535
Transmitter



CIRCUIT BREAKER FINDER SELECTION GUIDE



**REPLACED BY THE ENHANCED
AND ERGONOMIC 61-535**



RECEIVER FEATURES			
Visual and Audible Indicators	✓	✓	✓
Low Battery Indication	✓	✓	✓
Auto Power Off (after no activity)	(after 5 mins.)	(after 10 mins.)	(after 10 mins.)
Battery Type	9V	9V	9V
Weight	85g (w/o battery)	85g (w/o battery)	85g (w/o battery)
Warranty	2-Year*	2-Year*	2-Year*
ACCESSORIES			
Light Socket and 3-prong to 2-prong Adapters, Alligator Clips	TL-532A	TL-532A	TL-532A

* Visit www.idealind.com for warranty details.

Specifications are subject to change without notice.



IDEAL INDUSTRIES, INC.

IDEAL INDUSTRIES, INC.
1800 S. Prairie Drive, Sycamore, IL 60178, USA / 815-895-5181 • 800-435-0705 in USA

International offices:
Australia • Canada • China • India • Mexico • UK

For complete sales office contact information, visit us at:

Form No. D-50730

1877

1.888.610.7664



www.calcert.com

sales@calcert.com