

SELECTOR SWITCHES

VOLTAGE AND CURRENT SELECTOR SWITCHES MODEL 9524xx

FEATURES

- Heavy duty switchgear style design.
- Terminals easily accessible for wiring.
- Large screws and saddle wiring clamps.
- Custom configurations available.

All models on this page
UL Recognized



APPLICATIONS

- For AMMETERS and VOLTMETERS

RATING

- Open continuous rating: 30A, 600V

INTERRUPTING RATINGS:

UL and CUL General Purpose

20A-120Vac

15A-240Vac

6A-600Vac

3A-125Vdc


1A-250Vdc



OPERATOR

It is suitable for steel panel, insulated panel, or centralized motor control clusters. A nameplate is included.

SWITCH DIMENSIONS

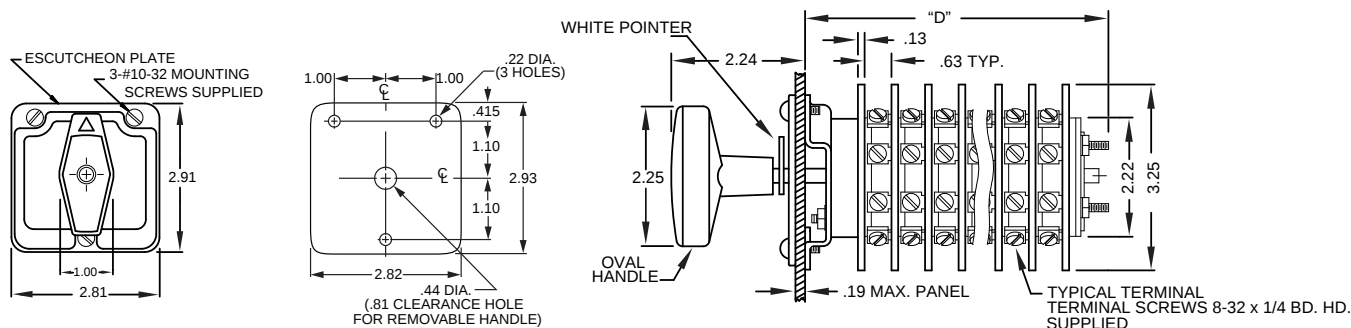

All Dimensions In Inches

MODELS AVAILABLE			
CATALOG NUMBER	FUNCTION	DECKS	DIM "D"
952403C	VOLTMETER, 3 Phase, Phase to Neutral	2	2.9
952404C	VOLTMETER, 3 Phase, Phase to Phase	2	2.9
952405C	VOLTMETER, 3 Phase, Phase to Phase and Phase to Neutral	2	2.9
952408C	AMMETER, 3 Phase, 2 Current Transformers	2	2.9
952410C	AMMETER, 3 Phase, 3 Current Transformers	2	2.9
952411C	AMMETER, 3 Current Transformers, Independent Circuits	6	5.4
952415C	AMMETER-VOLTMETER, 3 Phase, Phase to Phase, 3 Current Transformers	4	4.3

See the following pages for Schematics, Wiring Diagrams, and Contact Arrangement details.


FLEX-CORE®

SELECTOR SWITCHES

VOLTAGE AND CURRENT SELECTOR SWITCHES




MODEL 9524xx

VOLTMETER
Transfer Switch
3 Phase,
Phase to Neutral




952403C

DECK	CONTACT	POSITION			
		OFF	1	2	3
1	11		X		
				X	
					X
2	21		X		
				X	
					X







VOLTMETER
Transfer Switch
3 Phase,
Phase to Phase




952404C

DECK	CONTACT	POSITION			
		OFF	1-2	2-3	3-1
1	11		X		
				X	
					X
2	21		X		
				X	
					X






VOLTMETER
Transfer Switch
3 Phase,
Phase to Phase
and Phase to Neutral




952405C

DECK	CONTACT	POSITION						
		3-1	2-3	OFF	1	2	3	
1	11				X			
						X		
							X	
		X	X					
				X				
2	21				X			
						X		
							X	
		X	X					
				X				

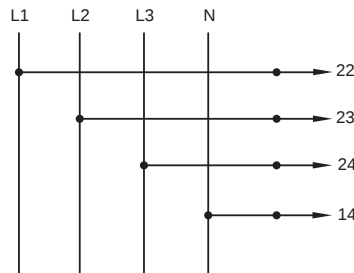




AMMETER
Transfer Switch
3 Phase,
2 Current Transformers



952408C

DECK	CONTACT	POSITION			
		OFF	1	2	3
1	11		X	X	X
			X	X	X
2	21		X	X	X
			X	X	X

☆ DENOTES MAKE BEFORE BREAK



FLEX-CORE®

SELECTOR SWITCHES


VOLTAGE AND CURRENT SELECTOR SWITCHES MODEL 9524xx

AMMETER

Transfer Switch

3 Phase,



3 Current Transformers



952410C



DECK	CONTACT	POSITION						
		OFF	☆	1	☆	2	☆	3
1	11			X	X	X		
	12							
	13							
2	21							
	22	X	X		X	X	X	X
	23	X	X	X	X	X	X	X
	24	X	X			X		

☆ DENOTES MAKE BEFORE BREAK



DECK	CONTACT	POSITION		
		1	2	3
1	11	X	X	
	12	X	X	
	13	X	X	
	14	X	X	
	15	X	X	
2	21	X	X	
	22	X	X	
	23	X	X	
	24	X	X	
	25	X	X	
3	31	X	X	
	32	X	X	
	33	X	X	
	34	X	X	
	35	X	X	
4	41	X	X	
	42	X	X	
	43	X	X	
	44	X	X	
	45	X	X	
5	51	X	X	
	52	X	X	
	53	X	X	
	54	X	X	
	55	X	X	
6	61	X	X	
	62	X	X	
	63	X	X	
	64	X	X	
	65	X	X	

☆ DENOTES MAKE BEFORE BREAK

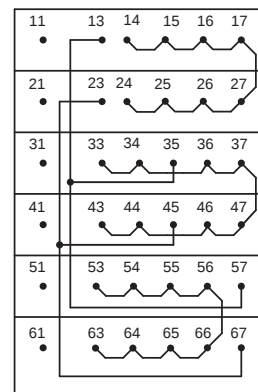


AMMETER

Transfer Switch

3 Current Transformers,

Independent Circuits



952411C

☆ DENOTES MAKE BEFORE BREAK


AMMETER-VOLTMETER

Transfer Switch

3 Phase,




Phase to Phase,

3 Current Transformers



952415C

☆ DENOTES MAKE BEFORE BREAK



FLEX-CORE®