

SELECTOR SWITCHES

VOLTAGE AND CURRENT SELECTOR SWITCHES MODEL 9524xx

FEATURES

- Heavy duty switchgear style design.
- Terminals easily accessible for wiring.
- Large screws and saddle wiring clamps.
- Custom configurations available.

All models on this page
UL Recognized



APPLICATIONS

- For AMMETERS and VOLTMETERS

RATING

- Open continuous rating: 30A, 600V

INTERRUPTING RATINGS:

UL and CUL General Purpose

20A-120Vac

15A-240Vac

6A-600Vac

3A-125Vdc


1A-250Vdc



OPERATOR

It is suitable for steel panel, insulated panel, or centralized motor control clusters. A nameplate is included.

SWITCH DIMENSIONS

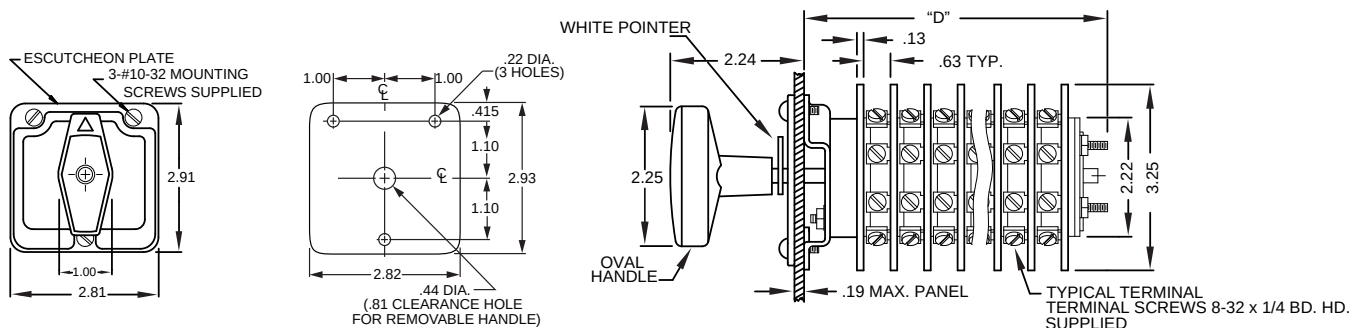

All Dimensions In Inches

MODELS AVAILABLE			
CATALOG NUMBER	FUNCTION	DECKS	DIM "D"
952403C	VOLTMETER, 3 Phase, Phase to Neutral	2	2.9
952404C	VOLTMETER, 3 Phase, Phase to Phase	2	2.9
952405C	VOLTMETER, 3 Phase, Phase to Phase and Phase to Neutral	2	2.9
952408C	AMMETER, 3 Phase, 2 Current Transformers	2	2.9
952410C	AMMETER, 3 Phase, 3 Current Transformers	2	2.9
952411C	AMMETER, 3 Current Transformers, Independent Circuits	6	5.4
952415C	AMMETER-VOLTMETER, 3 Phase, Phase to Phase, 3 Current Transformers	4	4.3

See the following pages for Schematics, Wiring Diagrams, and Contact Arrangement details.


FLEX-CORE®

SELECTOR SWITCHES

VOLTAGE AND CURRENT SELECTOR SWITCHES




MODEL 9524xx

VOLTMETER
Transfer Switch
3 Phase,
Phase to Neutral




952403C

DECK	CONTACT	POSITION			
		OFF	1	2	3
1	11		X		
				X	
					X
2	21		X		
				X	
					X







VOLTMETER
Transfer Switch
3 Phase,
Phase to Phase




952404C

DECK	CONTACT	POSITION			
		OFF	1-2	2-3	3-1
1	11		X		
				X	
					X
2	21		X		
				X	
					X






VOLTMETER
Transfer Switch
3 Phase,
Phase to Phase
and Phase to Neutral




952405C

DECK	CONTACT	POSITION						
		3-1	2-3	1-2	OFF	1	2	3
1	11					X		
							X	
								X
		X	X		X			
2	21					X		
							X	
								X
		X	X		X			

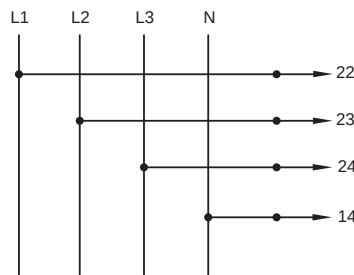




AMMETER
Transfer Switch
3 Phase,
2 Current Transformers



952408C

DECK	CONTACT	POSITION			
		OFF	1	2	3
1	11		X	X	X
			X	X	X
2	21		X	X	X
			X	X	X

☆ DENOTES MAKE BEFORE BREAK




FLEX-CORE®

SELECTOR SWITCHES

VOLTAGE AND CURRENT SELECTOR SWITCHES MODEL 9524xx



AMMETER
Transfer Switch
3 Phase,
3 Current Transformers




952410C

DECK	CONTACT	POSITION						
		OFF	☆	1	☆	2	☆	3
1	11							
	12		X	X	X			
	13				X	X		
2	21							
	22							
	23							
	24							

☆ DENOTES MAKE BEFORE BREAK





AMMETER
Transfer Switch
3 Current Transformers,
Independent Circuits




952411C

DECK	CONTACT	POSITION				
		1	☆	2	☆	3
1	11	⎓	⎓			
	⎓13		⎓			
	⎓14			⎓		
	⎓15				⎓	
	⎓16					⎓
2	21	⎓	⎓			
	⎓23		⎓			
	⎓24			⎓		
	⎓25				⎓	
	⎓26					⎓
3	31	⎓	⎓			
	⎓34		⎓			
	⎓35			⎓		
	⎓36				⎓	
	⎓37					⎓
4	41	⎓	⎓			
	⎓43		⎓			
	⎓44			⎓		
	⎓45				⎓	
	⎓46					⎓
5	51	⎓	⎓			
	⎓54		⎓			
	⎓55			⎓		
	⎓56				⎓	
	⎓57					⎓
6	61	⎓	⎓			
	⎓64		⎓			
	⎓65			⎓		
	⎓66				⎓	
	⎓67					⎓

☆ DENOTES MAKE BEFORE BREAK

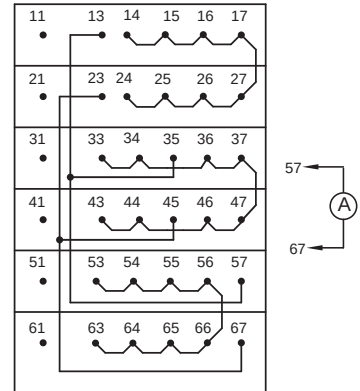



AMMETER-VOLTMETER
Transfer Switch
3 Phase,
Phase to Phase,
3 Current Transformers



952415C

DECK	CONTACT	POSITION						
		OFF	☆	1	☆	2	☆	3
1	11			X				
	12					X		
	13							X
2	21			X				
	22					X		
	23							X
3	31		X	X	X		X	
	32				X	X	X	
	33						X	X
4	41							
	42	X	X		X	X	X	X
	43	X	X	X		X	X	X
	44	X	X			X	X	X

☆ DENOTES MAKE BEFORE BREAK



FLEX-CORE®