



# Eurotherm®

## Adaptable power control expertise EPack-1PH Compact SCR Power Controllers

### Benefits

OEMs and system integrators need to be able to react quickly to customer needs while maximizing resources. End users continually need to improve operational efficiency and productivity. Eurotherm EPack™-1PH Compact SCR Power Controllers have been designed to deliver real savings, helping to reduce energy costs. Quick and easy to install, integrate and commission. Compact, with powerful and versatile features that help minimize costs whilst improving productivity and quality.

- Improved energy consumption to help reduce energy bills
- Help maximize yield with accurate and repeatable control
- Customizable options provide better value for money
- Easy to specify with reduced number of hardware variants
- Fast integration and commissioning
- Monitor efficiently with integrated measurements
- Simplified design reduces stock and spares holding

### Key features

- Native communication: Modbus® TCP and EtherNet/IP or PROFINET or EtherCAT comms for easy connection to PLC
- True power control with current limitation
- Large voltage capability from 100V to 500V adjustable in the same variant
- Measurements: current, voltage, power, impedance, energy usage and more
- SCCR 100kA with fuse




1.888.610.7664

 [www.calcort.com](http://www.calcort.com)

[sales@calcort.com](mailto:sales@calcort.com)


# Specifications

## General

Safety specification	IEC / EN60947-4-3:2014
EMC emissions specification	IEC / EN60947-4-3:2014 - Class A product
EMC immunity specification	IEC / EN60947-4-3:2014
Vibration tests	IEC / EN60947-1 annex Q category E
Shock tests	IEC / EN60947-1 annex Q category E
Approvals	
European community	EN60947-4-3:2014: Low-voltage switchgear and controlgear - Part 4-3: Contactors and motor-starters - AC semiconductor controllers and contactors for non-motor loads (identical to IEC60947-4-3:2014) Declaration of Conformity available on request.
US & Canada	UL60947-4-1 CAN/CSA C22.2 NO.60947-4-1-14 Low-Voltage Switchgear and Controlgear - Part 4-1: Contactors and Motor-Starters - Electromechanical Contactors and Motor-Starters - U.L. File N° E86160
Australia	Regulatory Compliance Mark (RCM) to Australian Communication and Media Authority Based on compliance to EN60947-4-3:2014
China	Product not listed in catalog of products subject to China Compulsory Certification (CCC)
Communication	<div> <div>EtherCAT</div> <div>  </div> </div> ODVA Declaration of Conformity EtherCAT: ETG certification for Semiconductor industry is not yet available. Waiting for SDP profile All protocols except EtherCAT: Certified to Achilles® CRT Level 1 Cybersecurity
Protection	CE: IP10 according to EN60529 (16 to 63A) or IP20 according to EN60529 (80 to 125A) UL: open type

## Condition of use

Atmosphere	Non-corrosive, non-explosive, non-conductive
Degree of pollution	Degree 2 according to IEC60947-1
Storage temperature	-25°C (-13°F) to 70°C (158°F)
Temperature & Altitude	0 to 45°C at 1000m (32°F to 113°F at 3280 Feet) 0 to 40°C at 2000m (32°F to 104°F at 6562 Feet)

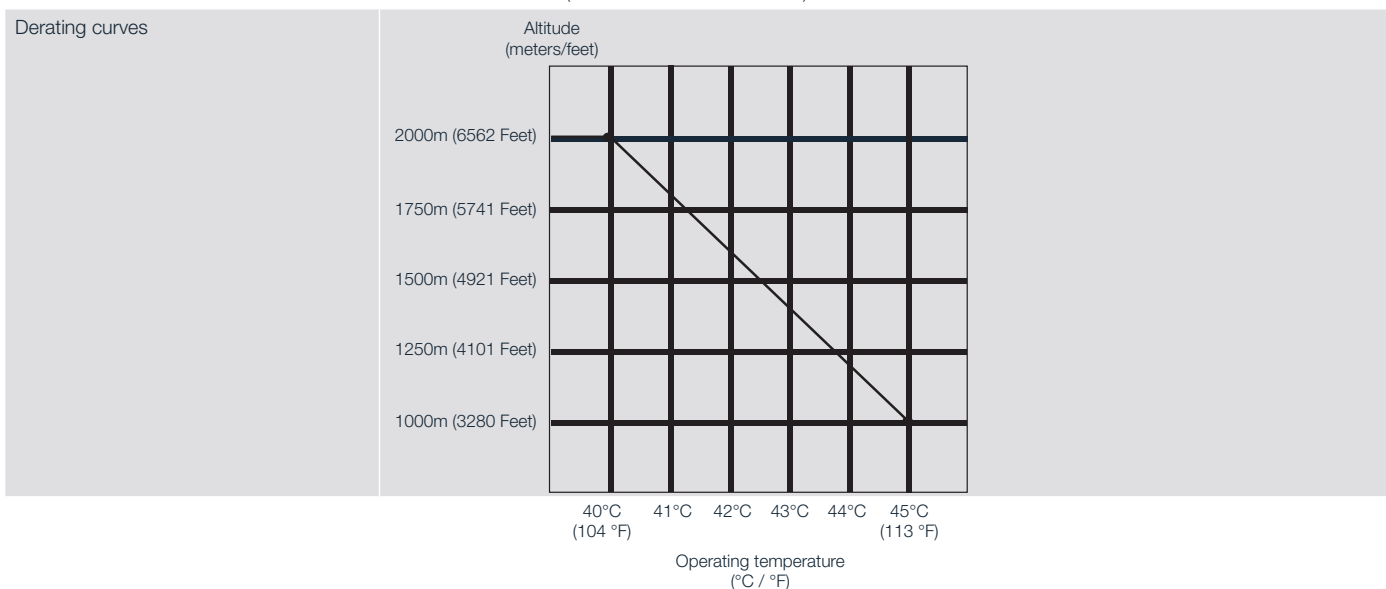

# Specifications

## Mechanical details

Unit	Height	Width	Depth	Weight
16 to 32A	129.2mm / 5.09in	51mm / 2.01in	136.2mm / 9.04in	0.8kg / 1.76lb
40 to 63A	129.2mm / 5.09in	72mm / 2.83in	173.3mm / 9.04in	0.95kg / 2.09lb
80 to 100A	197.6mm / 7.78in	80mm / 3.15in	202.1mm / 9.04in	1.8kg / 3.97lb
125A	197.6mm / 7.78in	120mm / 4.72in	202.1mm / 9.04in	2.5kg / 5.51lb

## Fuses

Current rating	Fuse holder size	Unit
≤25A without MS	10x38mm / 13/32x1-1/2in	88.5x17.5x64.5mm / 3.48x0.69x2.54in
≤25A with MS	14x51mm / 9/16x2in	110.8x26.5x76.5mm / 4.36x1.04x3.01in
32A with or without MS	14x51mm / 9/16x2in	110.8x26.5x76.5mm / 4.36x1.04x3.01in
40A with or without MS	14x51mm / 9/16x2in	110.8x26.5x76.5mm / 4.36x1.04x3.01in
50A with or without MS	22x58mm / 2-9/32in	127.5x35x76.5mm / 5.02x1.38x3.01in
63A with or without MS	27x60mm / 1-1/16x2-3/8in	149.4x40x93.5mm / 5.88x1.57x3.68in
80A with or without MS	27x60mm / 1-1/16x2-3/8in	149.4x40x93.5mm / 5.88x1.57x3.68in
100A with or without MS	27x60mm / 1-1/16x2-3/8in	149.4x40x93.5mm / 5.88x1.57x3.68in
125A with or without MS	27x60mm / 1-1/16x2-3/8in	149.4x40x93.5mm / 5.88x1.57x3.68in

## Power

Nominal current	4 to 125 amps
Nominal voltage	From 100V to 500V +10%/–15%
Accuracy	±2% of full scale from 100V to 500V +10%/–15%
Frequency	47Hz to 63Hz
Short circuit protection	By external supplemental high speed fuses
Rated conditionnal short-circuit current	100kA (coordination type 1)

## Utilization categories

AC51	Resistive or slightly inductive load (cos phi>0.8)
AC-55b	Switching of incandescent lamps
AC-56a	Transformer Primary
Heater type	Low/high temperature coefficient and non-aging/aging types: MOSI Molybdenum Silicide, Silicon Carbide, Carbon, SWIR.

## Control

Auxillary power supply	100V to 500V +10%/–15% or 24V ac/dc (±20%)
Control setpoint	Analog or Logic input or Digital Comms
Analog input signal	
Voltage	Range: 0-5V, 1-5 V, 0-10V or 2-10V Impedance: 140 kOhms typical (0-10V signal)
Current	Range: 0-20mA or 4-20mA Input resistance: 100 Ohms to allow for three units wired in series to be driven from a single controller's analogue output
Resolution	11 bits
Linearity ±0.1% of scale	±0.1% of Scale
Firing mode	Phase angle, Intelligent Half cycle, Variable Modulation Burst firing (default 16 cycles), Fix modulation period (default 2 seconds), Logic mode
Control mode	V <sup>2</sup> control, I <sup>2</sup> control, True Power control, Open loop with feedforward and Trim modes, Current limitation by threshold or by transfer V <sup>2</sup> to I <sup>2</sup> or P to I <sup>2</sup>
Configurable digital inputs	Input 1: enable by default ; Input 2: setpoint in logic mode, alarm acknowledgment, 10V supply, ...
Voltage inputs	PLC compatible inputs type 1 & 2 according to IEC 61131-2 - Active level (high): 11V<Vin<30V with 6mA<lin<30mA - Non-active level (low): -3V<Vin<5V with 2mA<lin<30mA or 5V<Vin<11V with lin<2mA
Contact closure inputs	- Current source: 10mA min; 15mA max - Open contact (non active) resistance: 800 Ohms to ∞ - Closed contact (active) resistance: 0 to 450 Ohms - Absolute Maximum ±30V or ±25mA
One alarm relay	Changeover relay 2A rms - 264V rms normally energised. (250V rms max for UL). This relay will be de-energised in case of serious alarms: short circuit thyristor, open circuit, fuse blown, missing main, chop off

# Specifications

## Communications

Connection	Dual port Ethernet - RJ45 integrated switch
Protocols	Modbus TCP, EtherNet/IP, PROFINET or EtherCAT
Speed rate	10/100 Mbps full or half duplex, except if EtherCAT option (100 Mbps full duplex only)


## Display

Technology	TFT
Size	1.4" diagonal (35.56mm)
Messages	Configuration, Monitoring and Diagnostics




## Additional functions

Standard	Counter, Logic & Math blocks, Linearization 16 points, Timer, Totalizer
Options	Energy counter, OEM security, Graphical wiring

Mechanical details

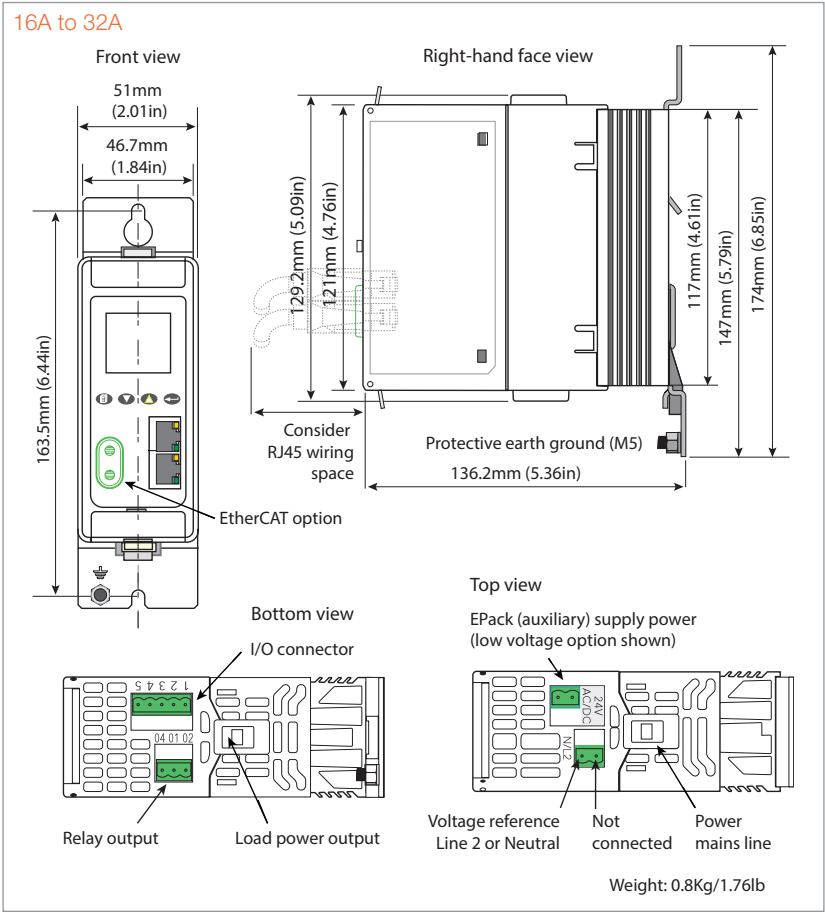


Connector details (pinout)

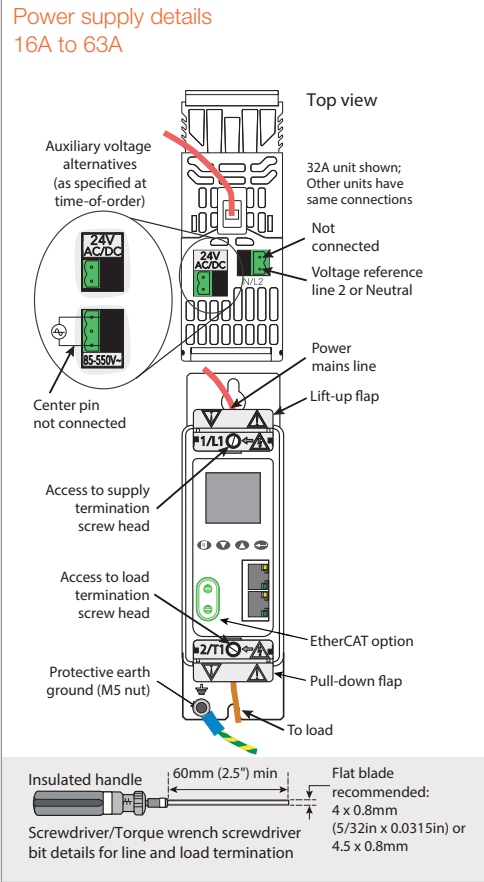
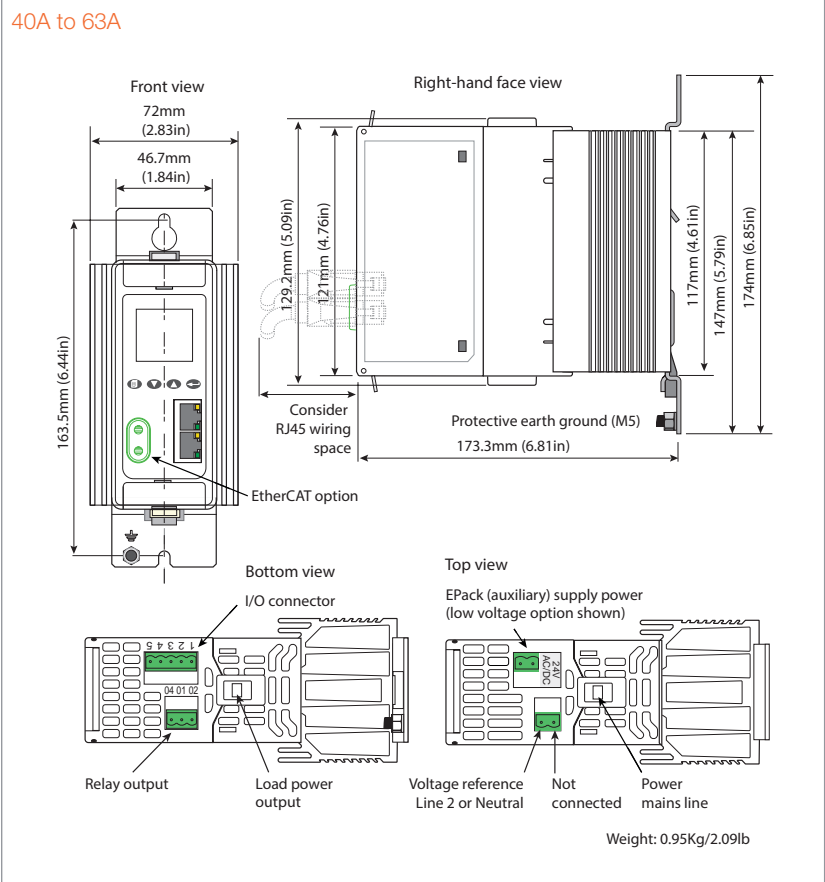
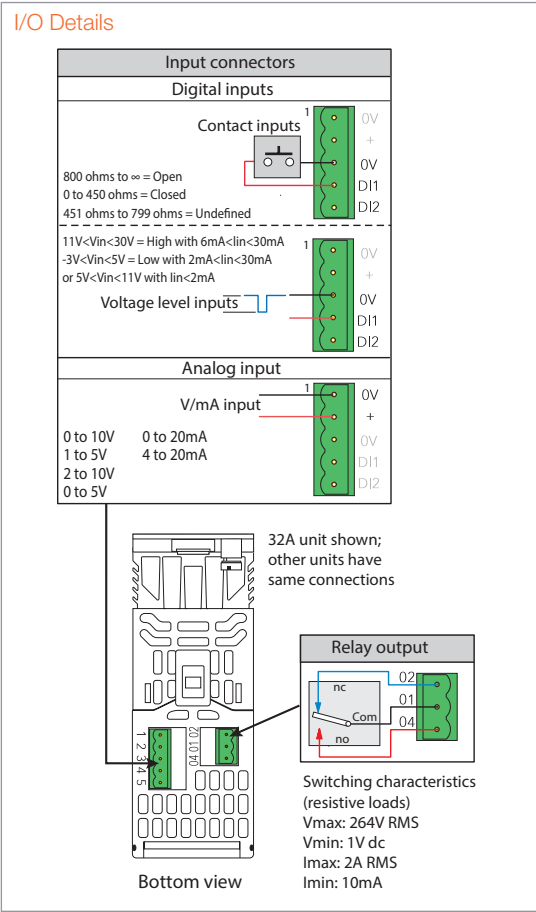




## Mechanical details

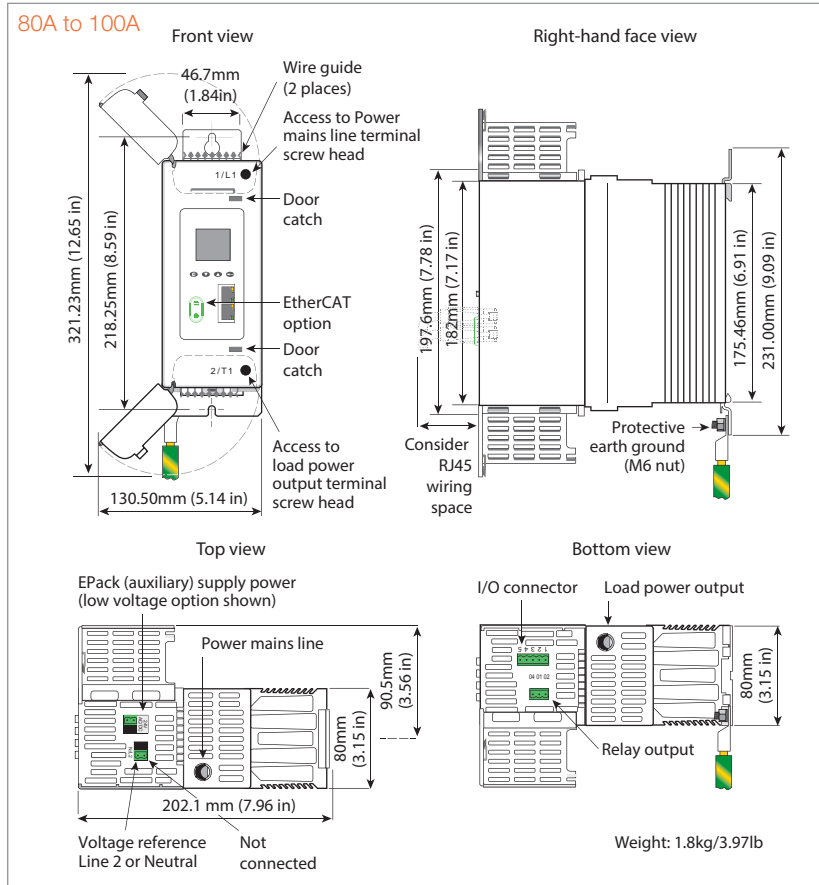

## Connector details (pinout)

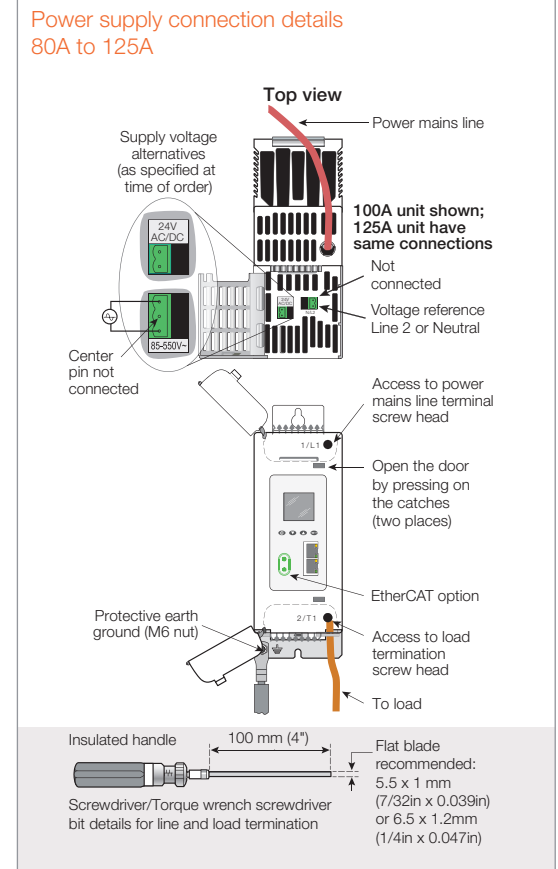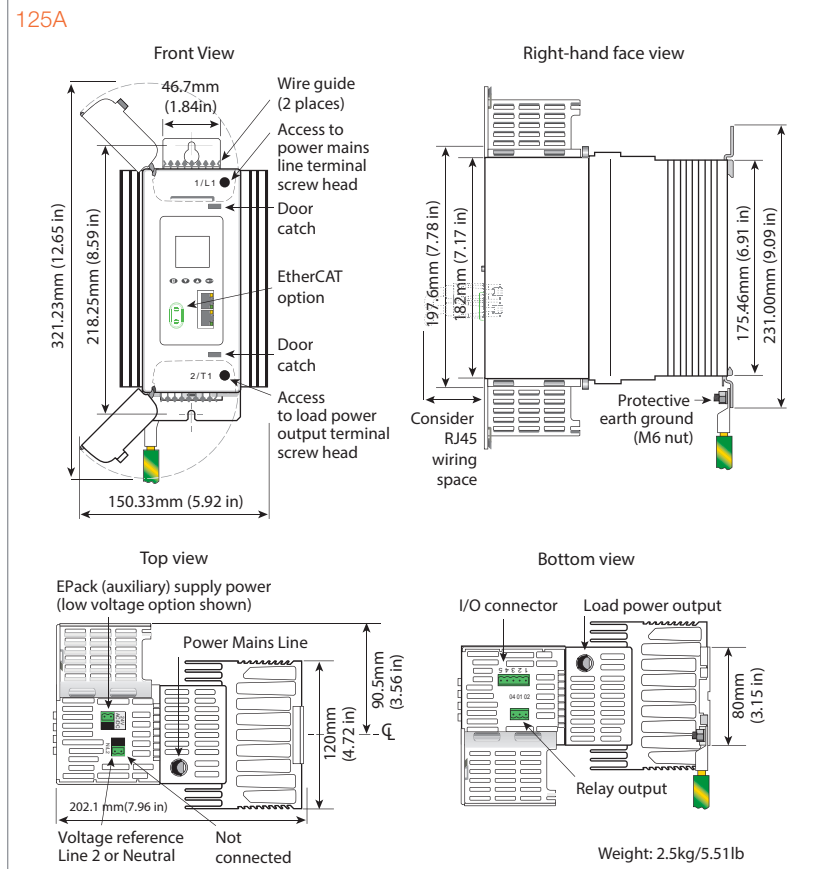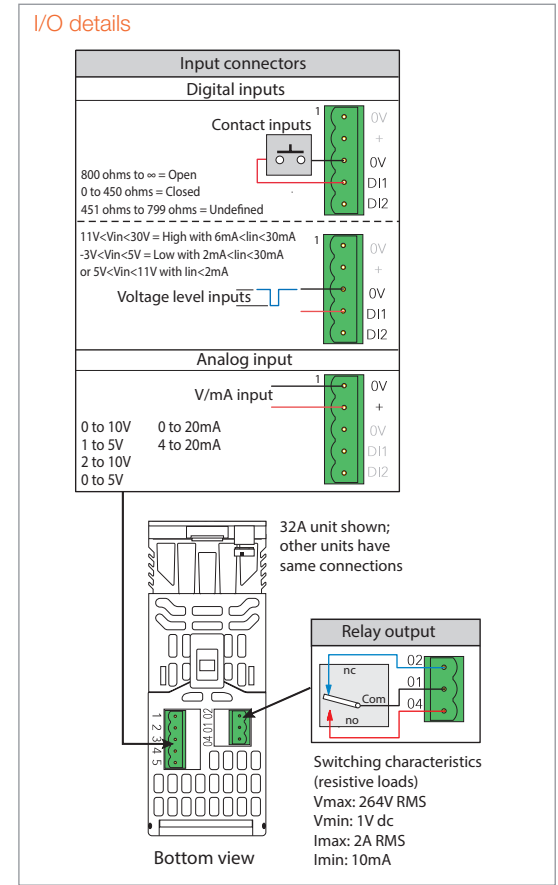

# Specifications

## EPack-1PH controller order codes

The EPack power controller is ordered using a short code for hardware and chargeable software options and an optional extended code section configuration of commissioning options.

If the extended code is not used, the software configuration is completed using a quick start procedure or using Eurotherm iTools software.

EPack controllers may be upgraded with additional chargeable options at any time using a software key order code.

EPACK-1PH	1	2	3	4	5	6	7	8	9	10	11	12	13
			XXX										
14	15	16	17	18	19	20	21	22	23				
									XXX				

Model	
EPACK-1PH	Power Controller

1	Maximum current
16A	16 amps
25A	25 amps
32A	32 amps
40A	40 amps
50A	50 amps
63A	63 amps
80A	80 amps
100A	100 amps
125A	125 amps

2	Auxiliary power supply <small>note</small>
500V	500V max
24V	24V ac/dc

3	Reserved
XXX	Reserved

4	Control option
V2CL	V <sup>2</sup> with current limitation by threshold (standard)
I <sup>2</sup>	I <sup>2</sup> control
V <sup>2</sup>	V <sup>2</sup> control
PWRCL	Power control with current limit

5	Transfer option
XXX	No Transfer
TFR	I <sup>2</sup> Transfer

6	Energy option
XXX	None
EMS	Energy measurement

7	Comms option
TCP	Modbus TCP (standard)
IP	EtherNet/IP
PN	PROFINET
CAT <small>note</small>	EtherCAT

8	OEM security
XXX	No OEM Security
OEM	OEM Security

9	Warranty
XXXXXX	Standard Warranty
WL005	5 Year Warranty
USWL3	US Extended Warranty

10	Custom labelling
XXXXXX	Standard (Eurotherm)
FXXXX	Special Label

11	Graphical wiring
XXX	No Graphical Wiring Edition
GWE	Graphical Wiring Editor (standard)

12	Fuse
XXX	Without fuse
HSP	High speed fuse without microswitch
HSM	High speed fuse with microswitch

13	Configuration
XXXXXX	Default
LC	Long code
EEnnn	Customer clone number

### Optional configuration

14	Nominal load current
NNNA	1 - Value field 1

15	Nominal line voltage
100V	100 volts
110V	110 volts
115V	115 volts
120V	120 volts
127V	127 volts
200V	200 volts
208V	208 volts
220V	220 volts
230V	230 volts
240V	240 volts
277V	277 volts
380V	380 volts
400V	400 volts
415V	415 volts
440V	440 volts
460V	460 volts
480V	480 volts
500V	500 volts

16	Load type
XX	Resistive
TR	Transformer primary

17	Heater type
XX	Resistive
MOSI	Molybdenum
CSI	Silicon Carbide
SWIR	Short Wave Infra-Red

18	Firing mode
PA	Phase angle
IHC	Intelligent half cycle
BF	Variable Modulation Burst firing (default 16 cycles)
FX	Fixed modulation period (default 2 seconds)
LGC	Logic mode

19	Analog input function
XX	None - setpoint via comms
SP	Setpoint
HR	Setpoint limit
IL	Current limit
TS	Current transfer span

20	Analog input type
0V	0-10 volts
1V	1-5 volts
2V	2-10 volts
5V	0-5 volts
0A	0-20 mA
4A	4-20mA

21	Digital input 2 function
XX	None
LG	Setpoint for logic mode
AK	Alarm acknowledgement
RS	Remote setpoint selection
FB	Fuse blown
SU	10V supply

22	Reserved
XXX	Reserved

note Hardware variant, not available as software upgrade option

# Specifications

## Software upgrade options

EPACKUPG-1PH	1	2	3	4	5	6	7	8
--------------	---	---	---	---	---	---	---	---

1	Serial number instrument
nnnn	Serial number

2	Current ratings
XXX	No change
16A-25A	Upgrade 16A to 25A
16A-32A	Upgrade 16A to 32A
25A-32A	Upgrade 25A to 32A
40A-50A	Upgrade 40A to 50A
40A-63A	Upgrade 40A to 63A
50A-63A	Upgrade 50A to 63A
80A-100A	Upgrade 80A to 100A

3	Control option
XXX	No change
V2-I2	Upgrade V <sup>2</sup> to I <sup>2</sup>
V2-PWR	Upgrade V <sup>2</sup> to PWR
I2-PWR	Upgrade I <sup>2</sup> to PWR

4	Transfer option
XXX	No change
TFR	I <sup>2</sup> transfer

5	Energy option
XXX	No change
TFR	Energy measurement

6	Comms option
XXX	No change
IP	EtherNet/IP
PN	PROFINET

7	Graphical wiring
XXX	No change
GWE	Graphical wiring editor

8	OEM security
XXX	No change
OEM	OEM security

Document Number HA031520USA Issue 12

Watlow, Eurotherm, EurothermSuite, EFit, EPack, EPower, Eycon, Chessell, Mini8, nanodac, piccolo and versadac are trademarks and property of Watlow its subsidiaries and affiliated companies. All other trademarks are the property of their respective owners.

©Watlow Electric Manufacturing Company. All rights reserved.



sales@calcert.com

1.888.610.7664

 www.calcert.com