



Complete Line of Easy-to-Use Compact Loggers with Expanded Memory


The new HIOKI compact data logger series easily records temperature, voltage, current, and instrumentation signals over long periods. Carried over from its highly reputed predecessor, this series includes features and functions such as 7 times the recording capacity of former models, data import during recording, continuous measurement even during battery replacement, and intuitive PC software. Flexible and easy-to-use at single and multiple locations, the new HIOKI compact data logger series is ideal for any

Meet a Wide Variety of Data Logging Applications




Temperature Logger / Humidity Logger

Manage the temperature and humidity in offices and factories. Visually monitor the data to save on air-conditioning and heating costs.

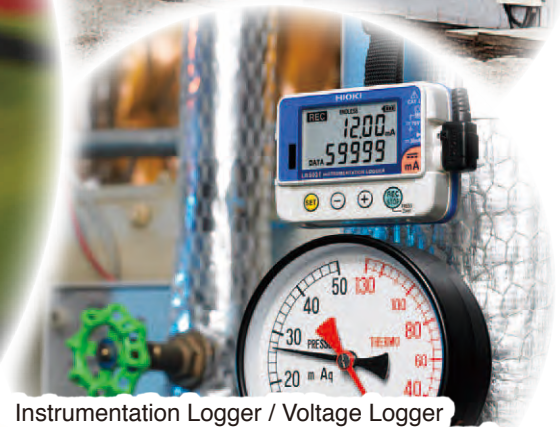

Instrumentation Logger / Voltage Logger

Record fluid flow such as for water, gas and oil. Measure flow meter output signals to monitor flow trends.

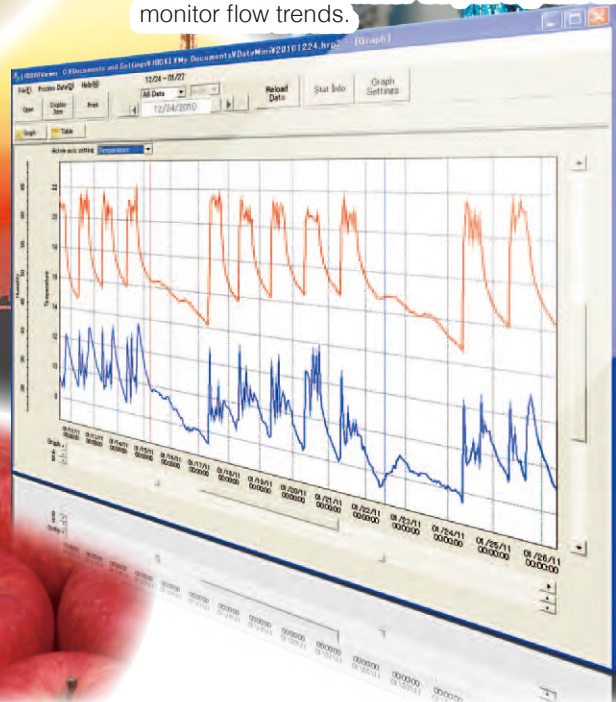


Clamp Logger

Manage the current consumption of plant and building equipment. Visually monitor power costs to efficiently conduct energy- and cost-saving activities.



Use as a Voltage Logger to record pyranometer output for evaluating insulation.




pyranometer



Voltage logger has a Preheat function

Use as a Clamp Logger and leakage sensor to record and monitor leakage trends.



Use as a Temperature Logger to record warehouse temperatures for visually monitoring temperature changes of products and goods.



Use as an Instrumentation Logger to record pressure sensor output and monitor fluctuations in air or oil pressure.



Easy operation in just 3 steps !

STEP 1
Set up & Record

Install a Data Logger, set an interval, and start measuring.

Easy to start recording

Set your recording interval. (from one second to 60 minutes)

Hold the REC button for two seconds to start recording.

Unlimited installation capabilities

Magnetic Strap (sold separately)

Wall-mounted Holder (sold separately) Not usable with LR5051

Kickstand (included, except for Model LR5051)

STEP 2
Transfer data from Data Logger to PC

Download data using infrared communication.

Communication Adapter LR5091

Grab the Data Logger from the worksite and connect to a PC.

Retrieving the Data Logger

Transfer data from Data Logger to PC using a USB connection

! Requires optional Communication Adapter or Data Collector

Download data using infrared communication.

Front Back

Data Collector LR5092-20

Top surface of LR5092-20

SD Card slot

USB Connector

Importing to a Data Collector

Retrieving the Data Collector

Transfer data from Data Logger to PC using a USB connection

* Data for up to 16 channels can be stored. Combine up to 16 single-channel Data Loggers (Models LR5011, LR5031, LR5041, LR5042, and LR5043), or up to eight 2-channel Data Loggers (Models LR5001, and LR5051).

Using an optional SD Memory Card, the amount of data that can be imported is practically limitless.

Importing to an SD Memory Card

Transfer data from SD Memory Card within Data Collector to PC using USB

or

Transfer data directly from SD Memory Card

STEP 3
View graphs and manage

View data graphically and easily print using the bundled software.

Advanced Features and Functions

Install Almost Anywhere

Easily mount the light-weight, pocket-sized loggers in tight spaces.



Actual size

Easy-to-see dual display

Temperature and humidity or current channels can be displayed. View maximum and minimum values while measuring.


Moist environments

IP54 splash-proof rating withstands operation in extremely humid environments like kitchens and pipe rooms. (Except Model LR5051)



Transfer data even during recording

Continue to record even when transferring data.

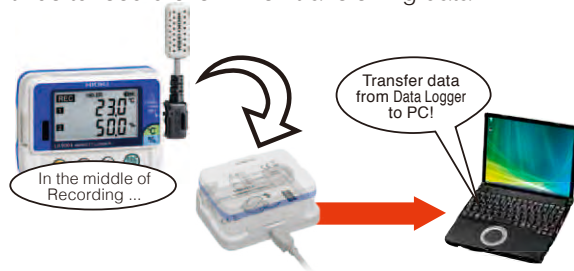

Batteries last up to 2 years

Energy-efficient design provides up to two years of battery life (For the LR5011 only. Actual battery life depends on model type and settings).



Replace batteries while recording

Recording continues for about 30 seconds even with the battery removed.



Note. With the LR5001, recording is interrupted during battery replacement if the battery is very weak.

Recording capacity up to 7 times previous models

Large internal memory stores 60,000 data points per channel. Long-term recording capability exceeds that of previous models.


| Interval times | Instantaneous value | Statistical value |
|----------------|---------------------|-------------------|
| 1s | 16h 40m | - |
| 2s | 1d 9h 20m | 8h 20m |
| 5s | 3d 11h 20m | 20h 50m |
| 10s | 6d 22h 40m | 1d 17h 40m |
| 15s | 10d 10h | 2d 14h 30m |
| 20s | 13d 21h 20m | 3d 11h 20m |
| 30s | 20d 20h | 5d 5h |
| 1m | 41d 16h | 10d 10h |
| 2m | 83d 8h | 20d 20h |
| 5m | 208d 8h | 52d 2h |
| 10m | 416d 16h | 104d 4h |
| 15m | 625d | 156d 6h |
| 20m | 833d 8h | 208d 8h |
| 30m | 1250d | 312d 12h |
| 60m | 2500d | 625d |

⚠ The maximum recording time depends on battery life. The battery may need to be replaced during long-term recording.

⚠ Customers using the previous Model 3636-20 Clamp Logger should note that the LR5051 can only record 15,000 points of average data, vs. 32,000 data points available in the 3636-20.

Record without missing fluctuations

With usual (instantaneous value) recording at long intervals, detailed fluctuations occurring within the intervals are missed. However, with the statistical value recording mode, detailed fluctuations are captured even when they occur during long recording intervals. In STAT mode, measurement is taken every second, and the maximum, minimum, average, and instantaneous values within the specified interval are recorded.

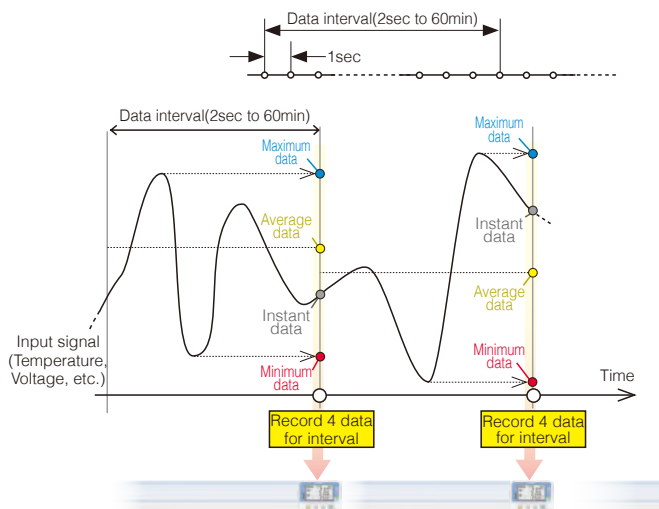

Never worry about a dead battery

The worry-free backup function preserves measurement data even after the battery dies.



Never worry about operating errors


Worry-free backup preserves recorded data even if a new measurement is started by mistake.



Bundled Software Ensures Smooth and Easy Data Analysis

■ Import data to a PC and create graphs

Use the LR5000 Utility program to import Data Logger data to a PC to make graphs and analyze data further. Easily print results using your PC.

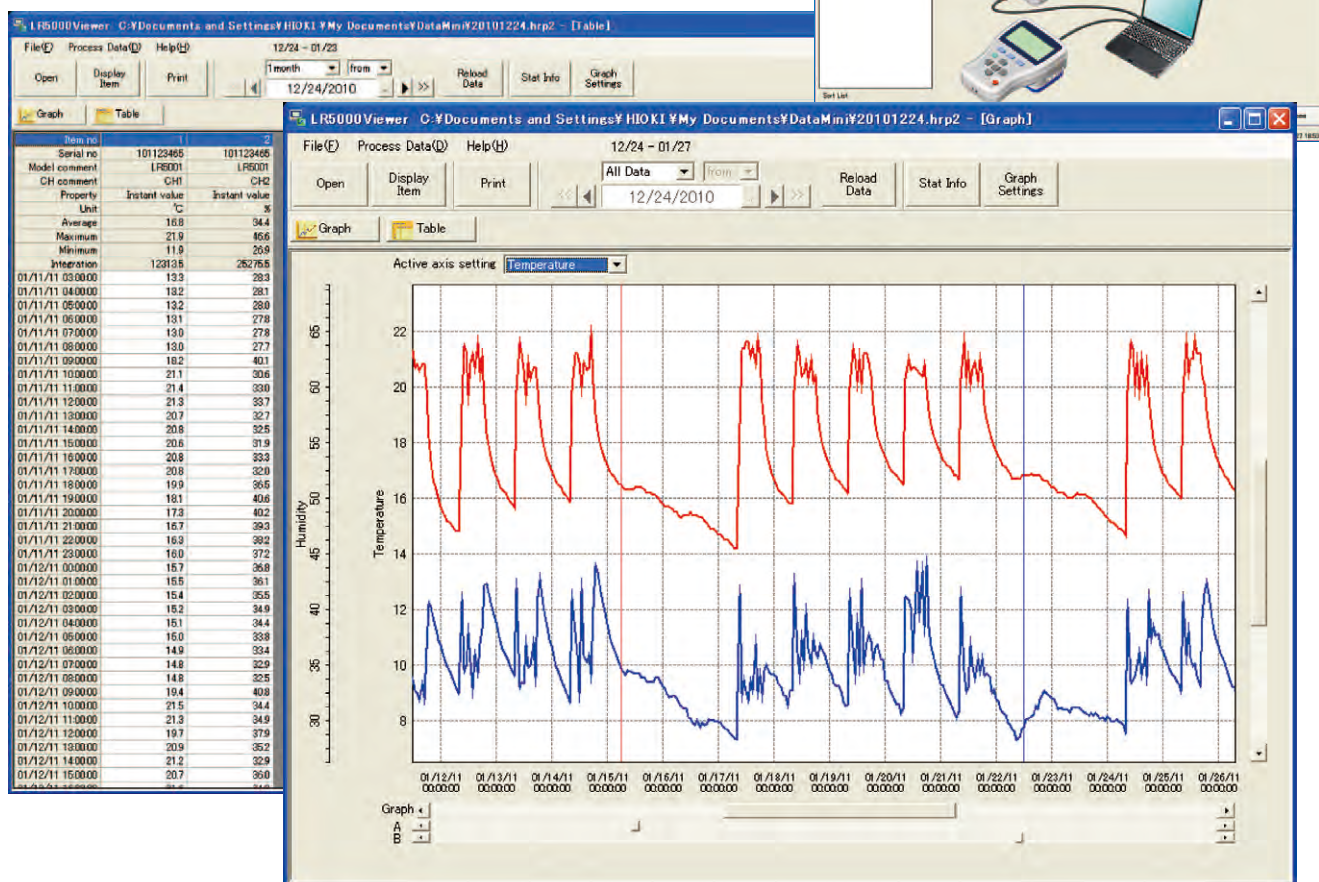


■ Show specific values using the cursor function

Use the A/B cursors to select any location on a graph and display its value. The PC software can also calculate maximum, minimum, and average values between A and B cursors.

■ Simple file aggregation and management

Transferred data can be combined with data previously transferred (from the same Data Logger unit) into one data on the PC.




■ Display data from former Data Logger models

The PC application also supports data collected from the HIOKI 36XX Series Data Loggers.





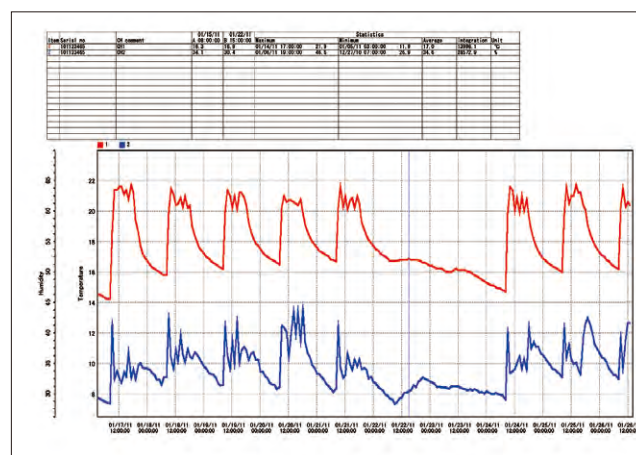



| LR5000 Utility Specifications | |
|-------------------------------|--|
| Configuring Data Logger | <ul style="list-style-type: none"> • Import/export Data Logger settings (LR5091 or LR5092-20 required) • Settings sent to each LR5000 logger are also saved to the PC. |
| | <ul style="list-style-type: none"> • Graphically display data for up to 16 channels • Select colors and display/hide any channel and graph |



| | |
|-----------------|--|
| Print function | Print graphs Print statistical data. |
| Data processing | Scaling Power calculation Energy cost calculation Operating ratio calculation Integration Dew point temperature Calculate between channels |
| Operating | OS: Windows XP (SP2 or later) Windows Vista (SP1 or later) / Windows 7 CPU: 1GHz or more |

Communication Adapter and Data Collector Specifications

| | | |
|------------------------------------|---|---|
| Physical appearance |    |    |
| Model | Communication Adapter LR5091 | Data Collector LR5092-20 |
| Features | <ul style="list-style-type: none"> •Transfer data from a Data logger to a PC •Transfer Data Logger configurations or clock settings from a PC to the Data Logger | <ul style="list-style-type: none"> •Collect recorded data from the Data Logger to internal memory or SD card •View collected data in a graph •Transfer Data Logger configurations or clock settings from internal memory or SD card to the Data Logger •Transfer data from a Data Logger to a PC •Transfer Data Logger configurations or clock settings from a PC to the Data Logger |
| Interface with Data Logger | Infrared optical communications | |
| Interface with PC | USB2.0, Full Speed, Series Mini B Receptacle | |
| Clock functions | - | Auto calender, auto leap year |
| Display | - | Dot-matrix LCD (128 × 64 dots) |
| Display items | - | Data Logger configurations (Interval, Start/Stop method, Recording mode, Scaling, Alarm, Power-saving mode, Clock, Range) Collected data (Record list, Maximum data, Minimum data, Average, Graph, Value) |
| Internal memory capacity of data | - | 60,000 data elements × 16ch (instantaneous value mode) 15,000 data elements × 16ch (statistical value mode) |
| Removable storage media | - | SD Card (SDHC, Max 32GB) Save data and configurations |
| Operating environment | Indoors | |
| Power supply | DC 5 V (USB bus power) Maximum rated power 0.5 VA | DC 3 V (LR6 (AA) Alkaline battery 1.5 V×2) or DC 5 V (USB bus power) Maximum rated power 1 VA |
| Battery life | - | Approx. 12 hours or 500 times of data collection |
| Operating temperature and humidity | 0°C (32°F) to 40°C (104°F), 80% RH or less (non-condensating) | |
| Dimensions & Mass | 83 mm (3.27 in)W × 61 mm (2.40 in)H × 19mm (0.75 in)D, 43 g (1.5 oz) | 91 mm (3.58 in)W × 141 mm (5.55 in)H × 31 mm (1.22 in)D, 215 g (7.6 oz) (excluding batteries) |
| Accessories | USB cable (1 m)×1, CD (Application software "LR5000 Utility") × 1 | Instruction manual ×1, Operation manual×1, LR6 (AA) Alkaline battery 1.5V×2, USB cable (1 m)×1, CD (Application software "LR5000 Utility") × 1 |

LR5092-20 Option



SD Memory Card (2GB) Z4001

LR5000 Series Common specifications

(Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)



| | | | |
|--|--|------------------------|--|
| Recording interval | 1/ 2/ 5/ 10/ 15/ 20/ 30 seconds 1/ 2/ 5/ 10/ 15/ 20/ 30/ 60 minutes | Storage capacity | Instantaneous value mode 60,000 data sets per channel Statistical value mode 15,000 data sets per channel <small>Note: Customers using the previous Model 3636-20 Clamp Logger should note that the LR5051 can only record 15,000 points of average data, vs. 32,000 data points available in the 3636-20.</small> |
| Recording methods | One time recording Stop recording when the memory capacity is full. Endless recording Continue recording even when the memory capacity is full. (old data is overwritten.) | Display items | Measured value, Interval configuration, Date, Time, Alarm, Remaining battery power, Number of data, Maximum data, Minimum data |
| Recording modes (instantaneous value mode/ statistical value mode) | Instantaneous recording Instantaneous values are recorded at every recording interval. Statistical value recording Measure at one second intervals, and record the instantaneous, maximum, minimum, and average values within every recording interval. | Recording start / stop | Recording start Manual start Timer start Recording stop Manual stop Timer stop When the memory capacity is full (One time recording) |
| | | Data backup | Data from the last recording session is always backed up. Back up recorded data and configuration when battery is dead. |
| | | Interface | Infrared optical communications with LR5091, LR5092-20 |
| | | | During battery replacement, recording and clock operations are preserved for about 30 seconds. (Recording operation is not possible during battery replacement.) |

LR5000 Series common options



Magnetic Strap
Z5004








Wall-mounted Holder
LR9901

Not compatible with Model LR5051



Analysis of measurement data on a PC requires the optional LR5091 Communication Adapter or LR5092-20 Data Collector. See page 6 for details.


Product Specifications (Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year) See page 6 for Common specifications
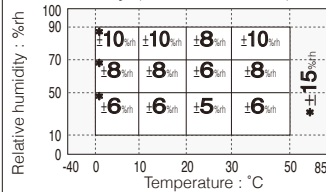
| | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------------------------------|--|---|--------|----|--------|----|--------|---|--------|-----|--------|--|-----|--------|-----|--------|----|--------|----|--------|---|--------|-----|--------|
| Physical appearance | <div> Bundled sensor (LR9504) (Sensor is out of warranty)</div> | <div> Optional sensor (LR9604) (Sensor is out of warranty)</div> | | | | | | | | | | | | | | | | | | | | | | |
| Model | HUMIDITY LOGGER LR5001 | | | | | | | | | | | | | | | | | | | | | | | |
| Features | Temperature and humidity are recorded simultaneously using supplied or optional temperature and humidity sensors. | | | | | | | | | | | | | | | | | | | | | | | |
| Measurement items | Temperature 1ch and Humidity 1ch | | | | | | | | | | | | | | | | | | | | | | | |
| Measurement range | Temperature : -40°C to 85°C Humidity : 0% to 100% RH | | | | | | | | | | | | | | | | | | | | | | | |
| Accuracy | <div>Temperature (LR5001 + Sensor)</div> <table><tr><td>85</td><td>±2.0°C</td></tr><tr><td>70</td><td>±1.0°C</td></tr><tr><td>35</td><td>±0.5°C</td></tr><tr><td>0</td><td>±1.0°C</td></tr><tr><td>-40</td><td>±1.0°C</td></tr></table> <div>Humidity (LR5001+Sensor)</div>  <div>* Values provided for reference only.</div> | 85 | ±2.0°C | 70 | ±1.0°C | 35 | ±0.5°C | 0 | ±1.0°C | -40 | ±1.0°C | <div>(LR5011+Sensor)</div> <table><tr><td>180</td><td>±5.0°C</td></tr><tr><td>120</td><td>±2.0°C</td></tr><tr><td>70</td><td>±1.0°C</td></tr><tr><td>35</td><td>±0.5°C</td></tr><tr><td>0</td><td>±1.0°C</td></tr><tr><td>-40</td><td>±1.0°C</td></tr></table> | 180 | ±5.0°C | 120 | ±2.0°C | 70 | ±1.0°C | 35 | ±0.5°C | 0 | ±1.0°C | -40 | ±1.0°C |
| 85 | ±2.0°C | | | | | | | | | | | | | | | | | | | | | | | |
| 70 | ±1.0°C | | | | | | | | | | | | | | | | | | | | | | | |
| 35 | ±0.5°C | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | ±1.0°C | | | | | | | | | | | | | | | | | | | | | | | |
| -40 | ±1.0°C | | | | | | | | | | | | | | | | | | | | | | | |
| 180 | ±5.0°C | | | | | | | | | | | | | | | | | | | | | | | |
| 120 | ±2.0°C | | | | | | | | | | | | | | | | | | | | | | | |
| 70 | ±1.0°C | | | | | | | | | | | | | | | | | | | | | | | |
| 35 | ±0.5°C | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | ±1.0°C | | | | | | | | | | | | | | | | | | | | | | | |
| -40 | ±1.0°C | | | | | | | | | | | | | | | | | | | | | | | |
| Waterproof and dust-proof performance | IP54 (splash-proof construction) | | | | | | | | | | | | | | | | | | | | | | | |
| Operating temperature and humidity | -20°C (-4°F) to 70°C (158°F) , 80% RH or less (non-condensating) | | | | | | | | | | | | | | | | | | | | | | | |
| Dimensions & mass | Approx. 79 mm (3.11 in)W × 57 mm (2.24 in)H × 28 mm (1.10 in)D 105 g (3.7 oz) | | | | | | | | | | | | | | | | | | | | | | | |
| Power supply | LR6 (AA) Alkaline battery 1.5 V×1 | | | | | | | | | | | | | | | | | | | | | | | |
| Accessories | Humidity sensor LR9504×1, Kickstand | Kickstand | | | | | | | | | | | | | | | | | | | | | | |
| | LR6 (AA) Alkaline battery 1.5 V×1, Instruction manual ×1, Operation manual×1 | | | | | | | | | | | | | | | | | | | | | | | |
| Battery life | Case 1 : Approx. 3 months Case 2: Approx. 20 days | Case 1 : Approx. 2 years Case 2: Approx. 2 months | | | | | | | | | | | | | | | | | | | | | | |
| | Case 1 : 1min. recording interval, power-saving mode, Instantaneous recording, environmental temp.20°C Case 2 : 1sec. recording interval, power-saving mode, Instantaneous recording, environmental temp.20°C | | | | | | | | | | | | | | | | | | | | | | | |

(Reference) When the recording interval is set to 10 minutes, the LR5001 Temperature and Humidity Logger can measure for about one year between battery replacements.

LR5001 Options Humidity Sensor


■ Humidity Sensor

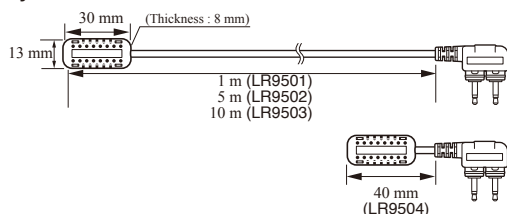

- Models (length) : LR9501 (1 m)
LR9502 (5 m)
LR9503 (10 m)
LR9504 (40 mm, bundled accessory)
- Temperature range : -40.0°C to 85.0°C
- Humidity range : 0.0% to 100.0% RH
- Response time : Approximately 300 seconds
(Temperature and humidity; 90% response time)


LR5011 Options Temperature Sensor

■ Molded plastic type

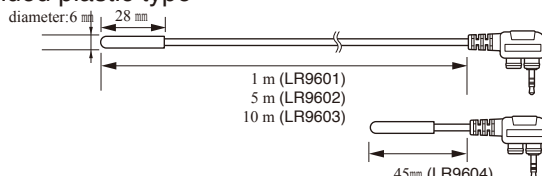


- Models (length) : LR9601 (1 m) LR9602 (5 m)
LR9603 (10 m) LR9604 (45 mm)
- Temperature range : -40°C to 180°C
- Response time : Approx. 100 seconds (90% response time)
- Material : Cable : Silicon Sensor head : Silicon

■ Lug type




- Models(length) : LR9611 (1 m) LR9612 (5 m)
LR9613 (10 m)
- Temperature range : -30°C to 180°C
- Response time : Approx. 45 seconds (90% response time)
- Material: Cable : Silicon Sensor head : Nickel-plated brass

■ Sheathed type



- Models(length) : LR9621 (1 m)
- Temperature range : -40°C to 120°C




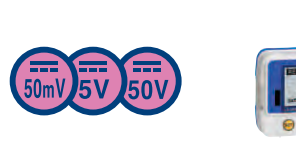


■ Needle type





- Models(length) : LR9631 (1 m)
- Temperature range : -40°C to 120°C

Analysis of measurement data on a PC requires the optional LR5091 Communication Adapter or LR5092-20 Data Collector. See page 6 for details.




Product Specifications (Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year) See page 6 for Common specifications

| | | |
|---------------------------------------|---|--|
| Physical appearance |    Bundled accessory (LR9801) |    Bundled accessory (LR9802) |
| Model | INSTRUMENTATION LOGGER LR5031 | VOLTAGE LOGGER LR5041, LR5042, LR5043 |
| Features | For recording 4-20 mA instrumentation signals, etc. | For recording instrumentation signals and measuring analog outputs from sensors and other devices |
| Measurement items | For Instrumentation / 0 to 20 mA DC, 1ch | DC voltage 1ch |
| Measurement range | DC -30.00 to 30.00 mA | LR5041: -50.00 mV to 50.00 mV LR5042: -5.000 V to 5.000 V LR5043: -50.00 V to 50.00 V |
| Accuracy | ±0.5% rdg. ±5 dgt. (@23°C ±5°C) | ±0.5% rdg. ±5 dgt. (@23°C ±5°C) |
| Waterproof and dust-proof performance | IP54 (splash-proof construction) | |
| Operating temperature and humidity | -20°C(-4°F) to 70°C(158°F) , 80% RH or less (non-condensating) | |
| Dimensions & Mass | Approx. 79 mm (3.11 in)W × 57 mm (2.24 in)H × 28 mm (1.10 in)D, 105 g (3.7 oz) | |
| Power supply | LR6 (AA) Alkaline battery 1.5 V×1 | |
| Accessories | Connection Cable LR9801×1, Kickstand | Connection Cable LR9802×1, Kickstand |
| Battery life | LR6 (AA) Alkaline battery 1.5 V×1, Instruction manual×1, Operation manual×1 Case 1 : Approx. 2 years Case 2: Approx. 2 months Case 1 : 1min. recording interval, power-saving mode, Instantaneous recording, environmental temp.20°C Case 2 : 1 sec. recording interval, power-saving mode, Instantaneous recording, environmental temp.20°C | |
| Other | - | Preheat function (When using preheat function, a separate external power supply is required.) |











| |
|---|
| LR5031 Option |
|  |
| CONNECTION CABLE LR9801(Bundled accessory) |

| |
|--|
| LR5041, LR5042, LR5043 Option |
|  |
| CONNECTION CABLE LR9802 (Bundled accessory) |

Product Specifications (Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year) See page 6 for Common specifications

| | |
|---------------------------------------|---|
| Physical appearance |  (Sensor warranty is one year)   *Sensor is sold separately. *For customers using the previous Model 3636-20 Clamp Logger, please note the difference in recordable average data points available in the LR5051. (Please refer to page 4.) |
| Model | CLAMP LOGGER LR5051 |
| Features | Recording load current of 50Hz/60Hz Recording leak current *Current and leak current that occur intermittently cannot be measured. The Clamp Logger LR5051 may be affected by high-frequency noise during leak current measurement. Please contact Hioki for more information if you plan to use the instrument in an environment where it would be affected by such noise. |
| Measurement items | AC Current (2 channels) |
| Measurement range | When Using 9669 : 1000 A range When Using CT6500 : 50.00 A / 500.0 A range When Using 9695-02 : 5.000 A / 50.00 A range When Using 9675 : 500.0 mA / 5.000 A range When Using 9657-10 : 500.0 mA / 5.000 A range |
| Accuracy | ±0.5% rdg. ±5dgt. + Clamp sensor accuracy |
| Waterproof and dust-proof performance | Not waterproof |
| Operating temperature and humidity | -0°C (32°F) to 50°C (122°F) , 80% RH or less (non-condensating) |
| Dimensions & mass | Approx. 79 mm (3.11 in)W × 70 mm (2.76 in)H × 37 mm (1.46 in)D, 165 g(5.8 oz) |
| Power supply | LR6 (AA) Alkaline battery 1.5V × 2 |
| Accessories | LR6 (AA) Alkaline battery 1.5V × 2 Instruction manual ×1, Operation manual×1 |
| Battery life | Case 1 : Approx. 1 years Case 2: Approx. 1 months Case 1 : 1min. recording interval, power-saving mode, Instantaneous recording, environmental temp.20°C Case 2 : 1 sec. recording interval, power-saving mode, Instantaneous recording, environmental temp.20°C |

LR5051 Options

| | | | |
|---------------------------------------|--|---|---|
| Load current | 3 m (9.84 ft) cord length | 3 m (9.84 ft) cord length | Connection cord 9219 is required (sold separately) |
| Physical appearance |   |   |   |
| Model | CLAMP ON SENSOR 9669 | CLAMP ON SENSOR CT6500 | CLAMP ON SENSOR 9695-02 |
| Measurable conductor diameter | φ55 mm (2.17") or less, 80 (3.15") × 20 (0.79") mm busbar | φ46 mm (1.81") or less | φ15 mm (0.59") or less |
| Primary current rating | 1000 A AC | 500 A AC | 50 A AC |
| Accuracy (45Hz to 66Hz) | ±1.0% rdg. ±0.01% f.s. | ±1.5% rdg. ±0.03% f.s. | ±0.3% rdg. ±0.02% f.s. |
| Maximum rated voltage to earth | CAT III 600 V rms | CAT III 600 V rms | CAT III 300 V rms |
| Maximum allowable input (45 to 66 Hz) | 1000 A continuous | 600 A continuous | 60 A continuous |
| Dimensions & mass | 99.5 (3.92")W × 188 (7.40")H × 42 (1.65")D mm, 590 g (20.8 oz.) | 77 (3.03")W × 151 (5.94")H × 42 (1.65")D mm, 360 g (12.7 oz.) | 51 (2.01")W × 58 (2.28")H × 19 (0.75")D mm, 50 g (1.8 oz.) |
| Load current | Insulated conductor | Insulated conductor | Insulated conductor |
| Physical appearance |   |   | |
| Model | CLAMP ON LEAK SENSOR 9675 | CLAMP ON LEAK SENSOR 9657-10 | |
| Measurable conductor diameter | φ30 mm | φ40 mm | |
| Primary current rating | 5 A AC (Using with LR5051) | 5 A AC (Using with LR5051) | |
| Accuracy (45Hz to 66Hz) | ±1.0% rdg. ±0.005% f.s. | ±1.0% rdg. ±0.05% f.s. | |
| Lag current | 1 mA(When 10 A AC is input) | 5 mA(When 100 A AC is input) | |
| Measurable conductor | Insulated conductor | Insulated conductor | |
| Maximum allowable input (45 to 66 Hz) | 10A continuous | 30A continuous | |
| Dimensions & mass | 60 (2.36")W × 113 (4.45")H × 24 (0.94")D mm, 160g (5.6 oz.) | 74 (2.91")W × 145 (5.71")H × 42 (1.65")D mm, 380g (13.4 oz.) | |