


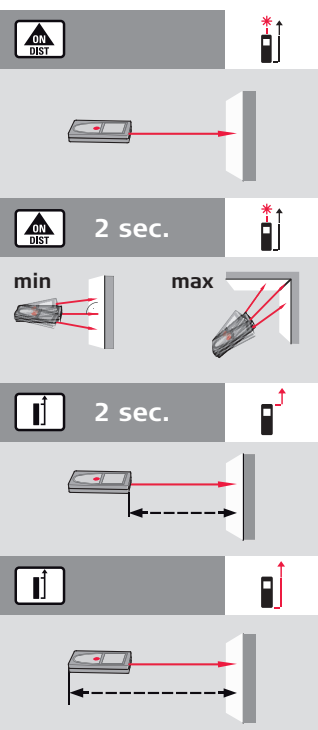

FUNC 2 sec.

Settings

FUNC 2 sec. 1.1 0.000 m 0.00 ft
 0.0000 m 0'00" 1/32
 0.000 in 0 in 1/32

FUNC / ON DIST → 2.1 BEEP ON → OFF

FUNC / ON DIST → 3.1 LRL

+ - Change settings in submenu / turn function ON/OFF

FUNC 2 sec. Exit

Bluetooth / NFC

Bluetooth 2 sec. 1.1 BLUETOOTH → OFF

Bluetooth / ON DIST → 2.1 NFC → OFF

Transfer value from main line

Bluetooth 2 sec. Exit

+ - Turn function ON/OFF

c/p Exit

Memory

1...30 8.294 m

Navigate through last 30 values

+ -

Clear memory:

c/p + 2 sec.

Quick Start

Leica DISTO™ D2/D2G



- 1 Display
- 2 ON/Measure
- 3 Add
- 4 Clear/OFF
- 5 Memory/Timer
- 6 Measuring Reference
- 7 Bluetooth/NFC
- 8 Functions/Settings
- 9 Subtract

- when it has to be right

Leica
Geosystems

 2 sec.  5

Timer




Adjust delay of automatic release

FUNC 2x 


Volume



FUNC 2 sec.   


FUNC 4x 

Smart Horizontal



FUNC 6x 

Stake-out




User Manual:




FUNC 1x 

Area



FUNC 3x 


Triangle Area



FUNC 2 sec.  


FUNC 5x 

Pythagoras (3-point)



FUNC 7x 

Levelling



  **ON**

  **OFF**

2 sec.

