


RealTorque® Core Removal Tool



YELLOW JACKET®



18991

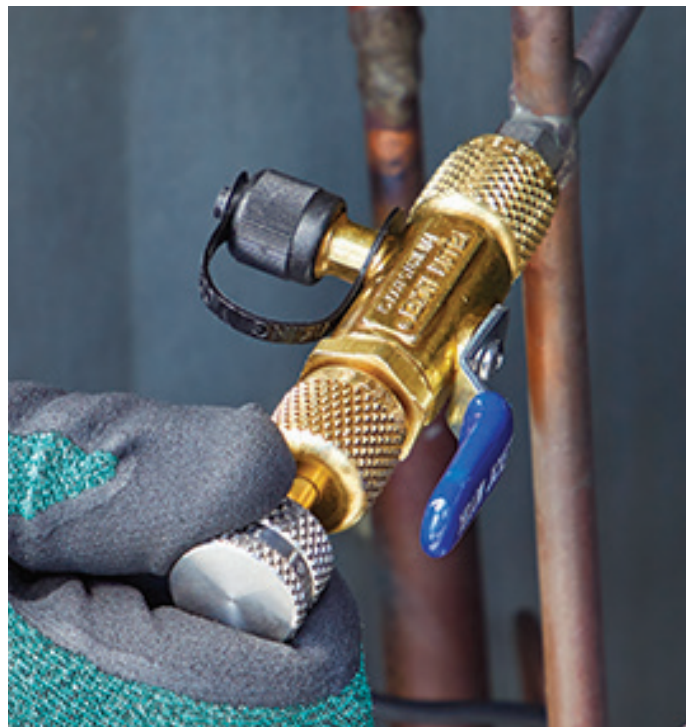


Vacuum/Charge Valve with Side Port


With the RealTorque™ Vacuum/Charge Valve with Side Port, the removal of system Schrader cores can greatly increase the speed of recovery and evacuation.

The RealTorque® Core Removal Tool is essential for effectively removing and replacing HVAC/R system Schrader cores.

Removal of system Schrader cores can greatly increase the speed of recovery and evacuation. Once charging is complete, it is important that the system Schrader cores be properly tightened to prevent leaks. The **RealTorque® Core Removal Tool** has an integrated torque mechanism that clicks as soon as the Schrader core has been tightened to the manufacturer recommended torque value of 3-5 in-lb. This provides assurance that the Schrader core is properly tightened on every job and minimizes the chances of leaks from this area of the system.

FEATURES & BENEFITS

- Core removal improves the speed of recovery and evacuation
- Torque mechanism clicks when Schrader core has been properly tightened to 3-5 in-lb
- Side port provides attachment location for vacuum gauge
- Available in 1/4" and 5/16" sizes
- Complete valves and superheat kits supplied in hard cases for protection
- One-year warranty
- Made in USA 

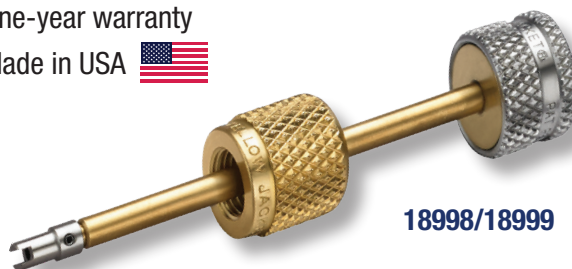


18998/18999

Torque Extractor (CRT) Assembly

Upgrade your current core removal tool with the 18998 (1/4") and 18999 (5/16") RealTorque® Extractor Assembly.



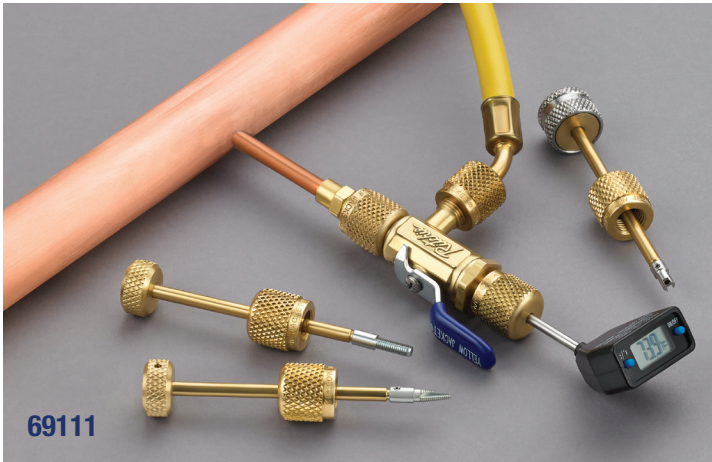

RealTorque® SuperHeat Kits (69111 & 69112)

The **RealTorque® SuperHeat Kits** include all the tools necessary for accurate system superheat calculations. The thermometer and core removal tool with side port allow for the pressure and temperature measurements to be taken at the same system location. Compare these measurements to the system refrigerant P/T chart to determine the system superheat. Once charging is complete, use the RealTorque® Core Removal tool to properly tighten the system Schrader core to the manufacturer's recommended torque value of 3-5 in-lb with its integrated torque mechanism. The kits also include all the tools necessary to replace Schrader cores without losing system pressure even if the core or mating core threads are damaged. Kits are available for 1/4" (69111) and 5/16" (69112) systems.

| UPC # | Description |
|-------|--|
| 18991 | RealTorque® 1/4" Vacuum/Charge Valve with Side Port |
| 18992 | RealTorque® 5/16" Vacuum/Charge Valve with Side Port |
| 18994 | RealTorque® 1/4" Male x 5/16" Female Vacuum/Charge Valve with 1/4" Side Port |
| 69111 | RealTorque® 1/4" SuperHeat Kit with Torque CRT |
| 69112 | RealTorque® 5/16" SuperHeat Kit with Torque CRT |

| UPC # | Replacement Parts |
|-------|---|
| 18978 | 1/4" Schrader Rethreading Accessory |
| 18979 | 1/4" Broken Schrader Remover Accessory |
| 18980 | 1/4" Schrader Accessory Set – 2 Piece |
| 18988 | 5/16" Schrader Rethreading Accessory |
| 18989 | 5/16" Broken Schrader Remover Accessory |
| 18998 | RealTorque® 1/4" Torque CRT Accessory |
| 18999 | RealTorque® 5/16" Torque CRT Accessory |
| 69106 | Digital Thermometer & 1/4" Nut |
| 69113 | Digital Thermometer & 5/16" Nut |