


Special Accessories

One display (UD-410) can be used in combination with various detectors.

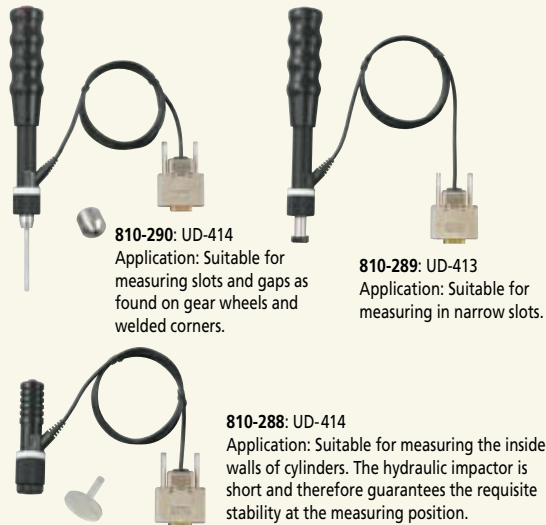

Special Accessories

Code No.		Technical specifications	Quantity
264-504-5D	Digimatic Mini Processor DP1-VR	For printing measurement data, various statistics, etc.	1
937387	Signal line	For connecting DP-1VR and display (1 m)	1
09EAA069D	Printing roll	For DP-1VR (1 roll)	1
19BAA238	Signal line	For connecting PC and display RS-232C (for DOS/V PC)	1
526688D	AC adapter		1
19BAA243	Hardness test block	880HLD (Ø 115 mm, t33 mm, 3.7 kg)	1
19BAA244	Hardness test block	830HLD (Ø 115 mm, t33 mm, 3.7 kg)	1
19BAA245	Hardness test block	730HLD (Ø 115 mm, t33 mm, 3.7 kg)	1
19BAA246	Hardness test block	620HLD (Ø 115 mm, t33 mm, 3.7 kg)	1
19BAA247	Hardness test block	520HLD (Ø 115 mm, t33 mm, 3.7 kg)	1
19BAA248	Stop capcylinder (3)	For measuring convex cylindrical surfaces (R10 to 20 mm): for types D and DC	1
19BAA249	Stop caphollow cylinder (4)	For measuring concave cylindrical surfaces (R14 to 20 mm): for types D and DC	1
19BAA250	Stop cap ball (5)	For measuring convex spherical surfaces (R10 to 27.5 mm): for types D and DC	1
19BAA251	Stop cap hollow ball (6)	For measuring concave spherical surfaces (R13.5 to 20 mm): for types D and DC	1
19BAA457	Carbide ball	For types D, DC and D+15	1
19BAA458	Impactor	For type DL	1
810-287	UD-411 detector	Type D approx. Ø 28 x 175 mm, approx. 120 g (stop cap Ø 22 mm)	1
810-288	UD-412 detector	Type DC approx. Ø 22 x 85 mm, approx. 50 g (stop cap Ø 22 mm)	1
810-289	UD-413 detector	Type D+15 approx. Ø 28 x 190 mm, approx. 130 g (stop cap Ø 11 mm)	1
810-290	UD-414 detector	Type DL approx. Ø 28 x 230 mm, approx. 140 g (stop cap Ø 4 mm)	1

Application Examples



810-289



810-290



810-288

Mitutoyo

1.888.610.7664



www.calcert.com

sales@calcert.com