

Brass Case, Liquid Filled



300 SERIES

- High quality, heavy-duty liquid filled gauge
- Vacuum and compound ranges through 0 psi to 15,000 psi
- 2-1/2" and 4" gauge sizes
- Die cast brass case with natural brass finish
- Copper alloy or 316 stainless steel and brass wetted parts

OPERATING SPECIFICATIONS

1. Working Pressure Limitations

a. Dynamic Pressure

The working pressure should be limited to 60% of the dial range.

b. Static Pressure

The working pressure, where no sharp fluctuations occur, should be limited to 90% of the dial range.

APPLICATIONS

- Automotive
- Construction
- Hydraulics & pneumatics
- Mining
- Stamping & forming presses
- Transportation

	SERIES	SPECIFICATIONS
Pressure ranges	300 Series (all)	Vacuum and compound ranges through 0 psi to 15,000 psi
Accuracy	25-300, 25-310	±1.6% full scale
	40-300, 40-310	± 1% full scale
Temperature ranges*	300 Series (all)	Media -4 °F to 140 °F (-20 °C to 60 °C) Ambient 0 °F to 160 °F (-18 °C to 71 °C) Optional temperature ratings available from -40 °F to 212 °F (-40 °C to 100 °C)
Measuring element	25-300, 25-310 (≤ 600 psi)	Copper alloy "C" tube
	25-300, 25-310 (800 psi to 6,000 psi)	Copper alloy coiled safety tube
	25-300, 25-310 (7,500 psi to 15,000 psi)	316 stainless steel coiled safety tube
	40-300, 40-310 (≤ 1,000 psi)	Copper alloy "C" tube
	40-300, 40-310 (15,000 psi)	316 stainless steel coiled safety tube
Connection	25-300, 25-310	1/4" NPT die-cast brass with the case. 7/16" – 20 SAE adjustable type straight thread with FKM O-ring is also available as a stock option on many ranges (-4 SAE).
	40-300, 40-310	1/4" NPT die-cast brass with the case. 1/2" NPT is available on certain 40-300 ranges as a stock option, and on all other 40-300 and 40-310's as a non-stock option.
Case	300 Series (all)	Die cast brass (natural brass finish) with safety relief plug
Cover ring	300 Series (all)	Polished brass
Lens	300 Series (all)	Acrylic with o-ring seal
Pointer	300 Series (all)	Balanced aluminum, black finish
Dial	300 Series (all)	Aluminum, white background with black scale. UV resistant.
Movement	300 Series (all)	Brass and nickel-silver with highly polished bearing surfaces
Fill liquid**	300 Series (all)	Glycerin

For details on accuracy/standard dial configuration and dial layouts, see pages 54-59.

* For every 18 °F (10 °C) shift in temperature from which the gauge is calibrated, the user can experience up to ±0.4% additional error.

** See page 53 for gauge fill options.

ORDERING INFORMATION															
GAUGE SIZES		25	2-1/2"		40	4"									
CASE TYPES		300	Brass, bottom connection		310	Brass, back connection									
PRESSURE RANGES	30vac	-30 inHg to 0 psi		30/300	-30 inHg to 0 to 300 psi		300	0 psi to 300 psi	3000	0 psi to 3,000 psi					
	30/15	-30 inHg to 0 to 15 psi		15	0 psi to 15 psi		400	0 psi to 400 psi	5000	0 psi to 5,000 psi					
	30/30	-30 inHg to 0 to 30 psi		30	0 psi to 30 psi		600	0 psi to 600 psi	6000	0 psi to 6,000 psi					
	30/60	-30 inHg to 0 to 60 psi		60	0 psi to 60 psi		800	0 psi to 800 psi	7500	0 psi to 7,500 psi					
	30/100	-30 inHg to 0 to 100 psi		100	0 psi to 100 psi		1000	0 psi to 1,000 psi	10000	0 psi to 10,000 psi					
	30/160	-30 inHg to 0 to 160 psi		160	0 psi to 160 psi		1500	0 psi to 1,500 psi	15000	0 psi to 15,000 psi					
	30/200	-30 inHg to 0 to 200 psi		200	0 psi to 200 psi		2000	0 psi to 2,000 psi							
SCALE OPTIONS		psi	psi single scale		psi/kPa	psi/kPa dual scale		psi/kg/cm²	psi/kg/cm² dual scale		psi/bar	psi/bar dual scale			
CONNECTION SIZES		1/4	1/4" NPT		1/2	1/2" NPT		SST	SAE J1926-3:7/16-20 Adjustable						
OPTIONS	CFF	Chrome Front Flange			RF	Rear Flange			GLO	Glass Lens Overlay			ST	Stainless Steel Tagging	
	CFFN	Chrome Front Flange w/o holes			CCR	Chrome Cover Ring			SGO	Safety Glass Overlay			BT3	Brass Threaded Orifice 0.3 mm	
	BFF	Brass Front Flange			CBU	Chrome Bezel & U-Clamp			AR	Adapter Ring			BT4	Brass Threaded Orifice 0.4 mm	
	BLFF	Black Front Flange			MIP	Maximum Indicating Pointer			LM	Laser Marking			BT8	Brass Threaded Orifice 0.8 mm	
	SSRF	304SS Rear Flange			LL	Polycarbonate Lens									

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

NOTE: Refer to 300 Series Options & Accessories chart on page 51 for availability by part number.

EXAMPLE

40 - 300 - 3000 - psi - 1/4 - BP3

Gauge size4"


Case type Brass, bottom connection

Pressure range & scale option0 psi to 3,000 psi


Connection size 1/4" NPT

Option..... Brass Press Fit Orifice 0.3 mm


25-300

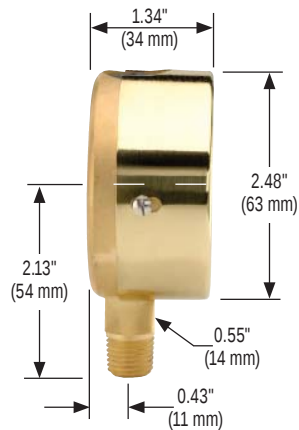

40-300

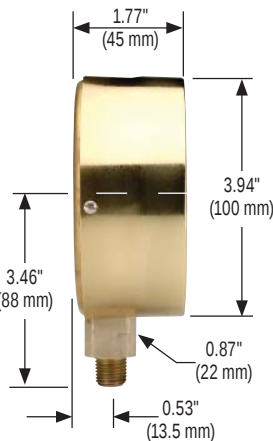


25-310

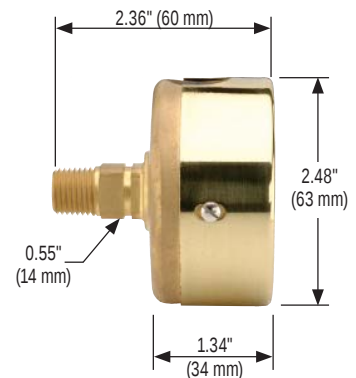


Dimensions


40-310

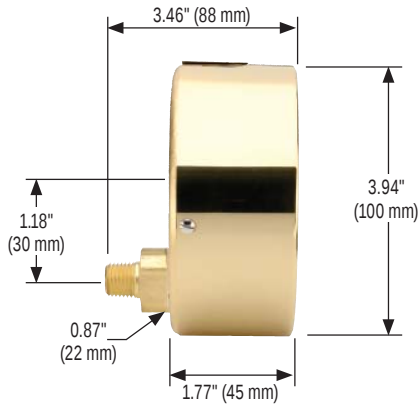


25-300 Front Flange

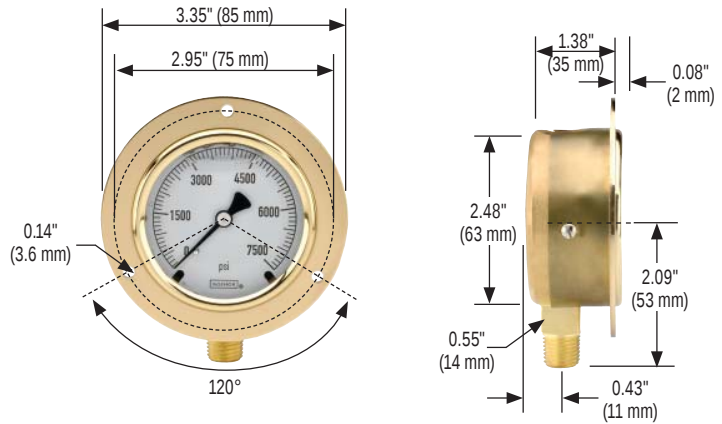


40-300 Front Flange

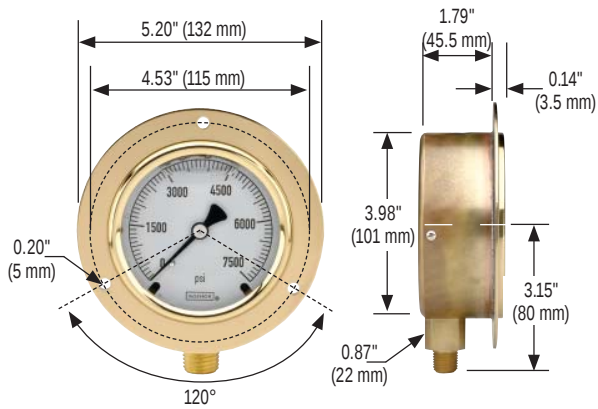


25-310 Front Flange

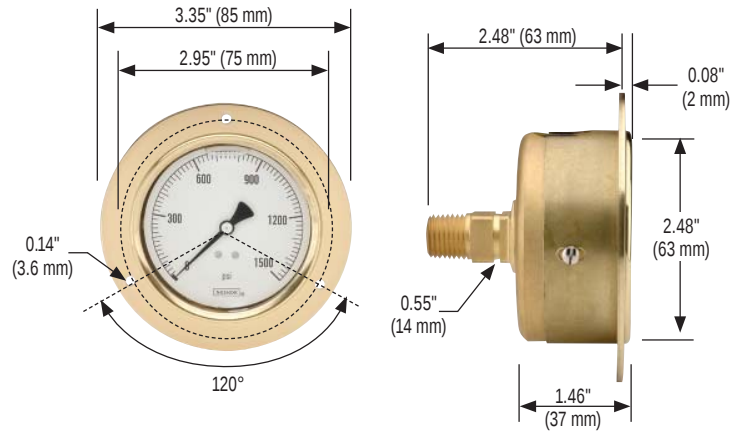


40-310 Front Flange

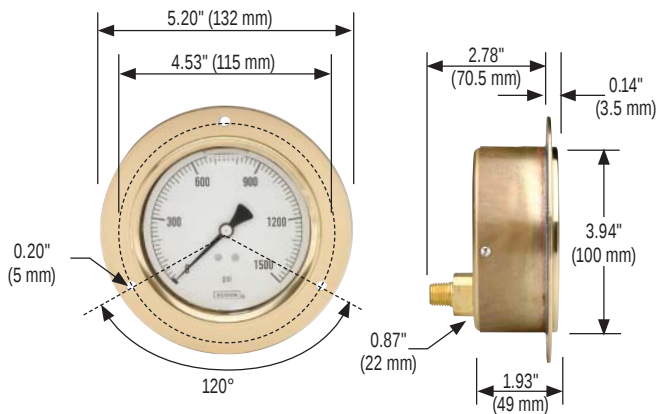


25-300 Rear Flange

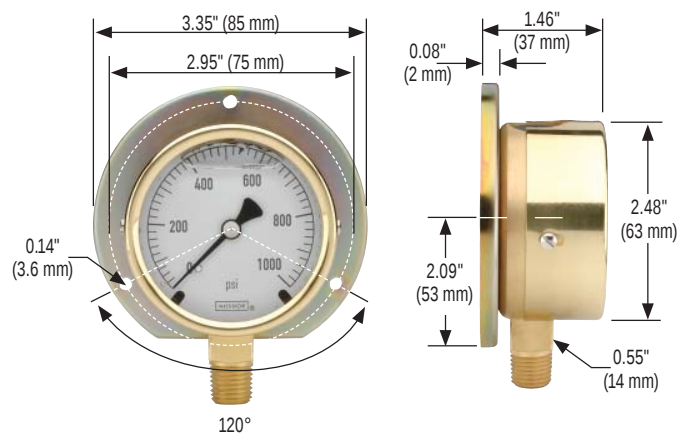



40-300 Rear Flange

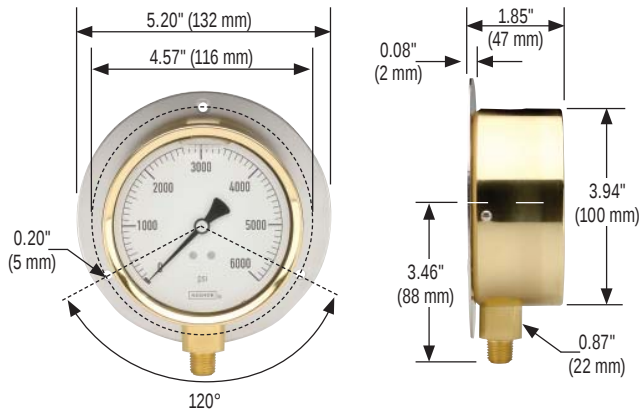


25-310 Rear Flange

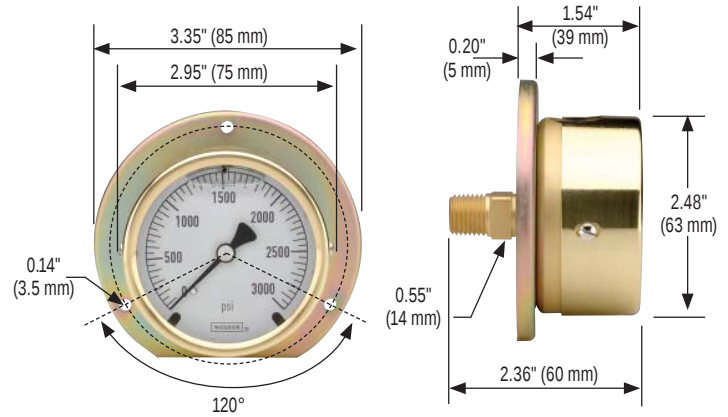

40-310 Rear Flange

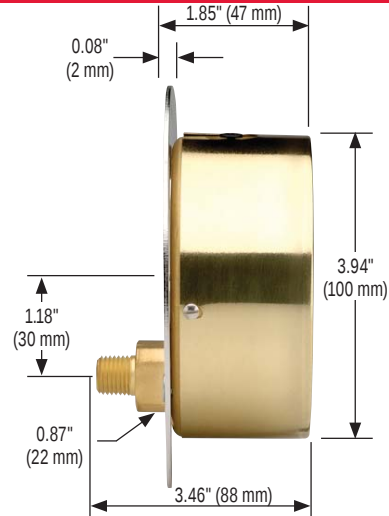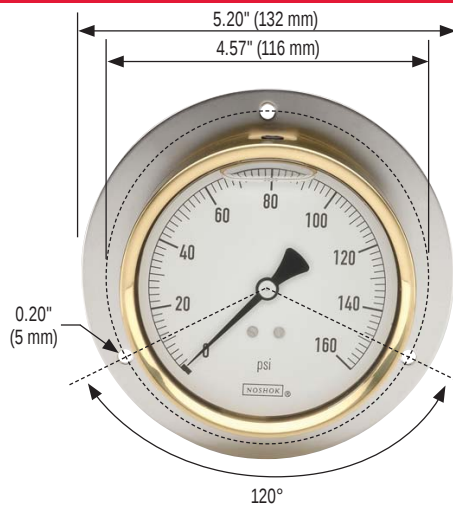

25-310 Chrome Triangular Bezel with U-Clamp

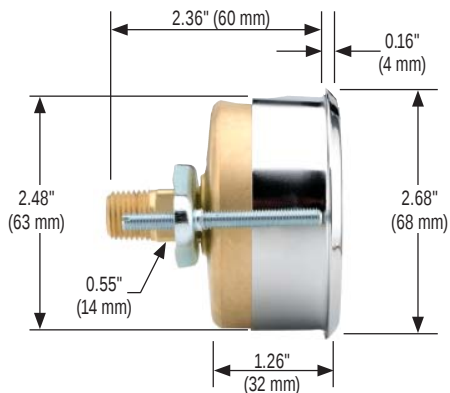

40-310 Chrome Triangular Bezel with U-Clamp

