

U-WAVE Bluetooth®

MeasurLink® ENABLED

Data Management Software by Mitutoyo

The Global Standard for Wireless Connection



SMALL TOOL INSTRUMENTS
AND DATA MANAGEMENT




U-WAVE Bluetooth®

U-WAVE-TMB/TCB



The new U-Wave Bluetooth transmitter features:

- Now utilizes the popular Bluetooth 4.2 Low Energy Wireless Technology.
- This new Bluetooth version of U-Wave allows a simple connection to smartphones, tablets and Bluetooth enabled Laptops and PC's.
- The same low profile and ergonomic fit benefits of the U-Wave Fit.
- A buzzer type and IP67 type with dustproof and waterproof specifications are available.
- Up to 7 units can be connected to 1 Bluetooth enabled PC without a receiver.
- New U-WavePak BLE for Android, iOS and Windows available at no cost.

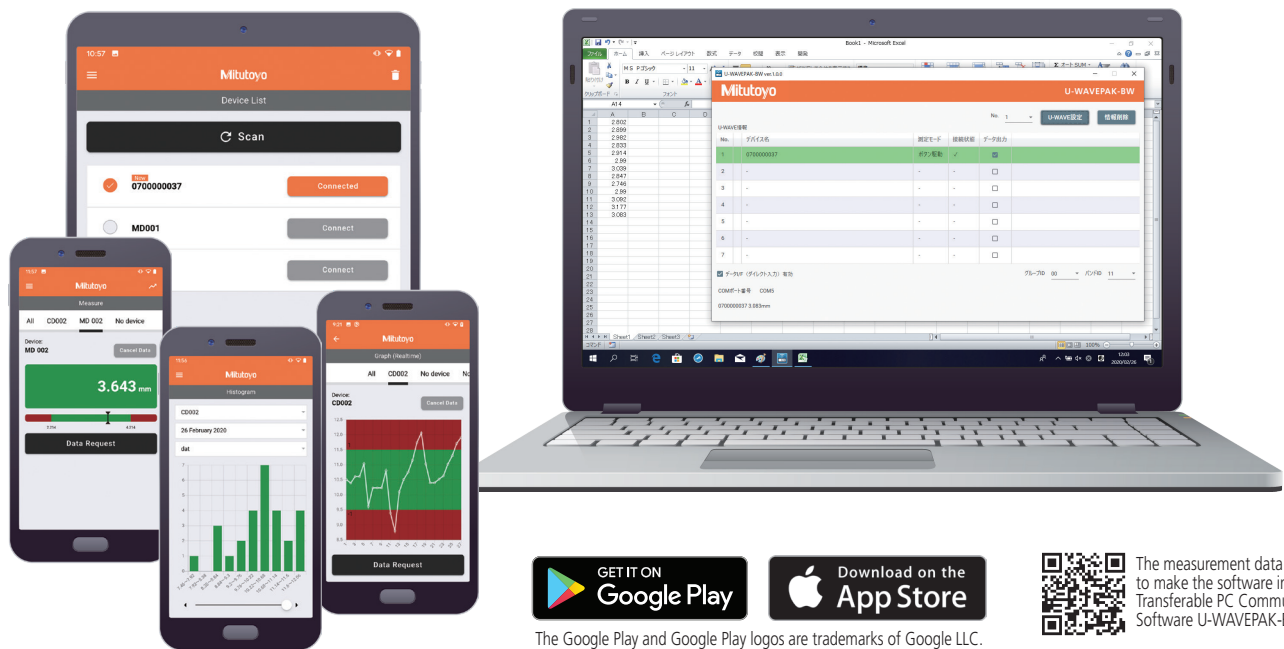

The measurement data is used to make the software in the pc Transferable PC Communication Software U-WAVEPAK-BW.

The Google Play and Google Play logos are trademarks of Google LLC.
The Apple and Apple logos are trademarks of Apple Inc.

U-WAVE-TMB



U-WAVE-TCB



Benefits of using U-Wave Bluetooth Wireless Data Collection System



No receiver required

Measurement data can be sent directly to a PC with Bluetooth®, Tablet or smartphone without a receiver.



Cost reduction

Attach to the Digimatic output of an existing Mitutoyo instrument to keep the system costs down.



Improved Efficiency

Input measurement data with one button. Eliminate the time and errors of handwritten recording.



Centralized data

Electronic Collection enables data to be stored in one location allowing preventive management of defects.




Easy data storage

Data can easily be sent to a smartphone or tablet allowing data to be collected in any environment.

U-WAVE Bluetooth®

The new U-Wave Bluetooth transmitter utilizes a different wireless technology than the U-Wave and U-Wave Fit

Specifications	U-Wave Bluetooth	U-Wave & U-Wave Fit
Wireless communication protocol	Bluetooth 4.2 Low Energy	Based on IEEE 802.15.4
Communication distance	Approx. 10 m (within visible range)	Approx. 20 m (within visible range)
Battery Life (CR2032)	200,000 Transmissions with U-WavePak-BM 50,000 Transmissions with U-WavePak-BW	400,000 Transmissions
Receiver Required	None	U-Wave-R
Data confirmation	Led or Buzzer(optional)	Led or Buzzer(optional)
Communication frequency	2.4 GHz	2.4 GHz
OS compatibility	U-Wavepak-BW supports Windows® 10 (32bit, 64bit) U-WavePak-BM supports IOS and Android	U-WavePak supports Windows® 2000 Professional (≥SP4), Windows® XP Professional (≥SP2), Windows® XP Home Edition (≥SP2), Windows Vista®, Windows® 7 (32bit, 64bit), Windows® 8, 8.1, 10 (32bit, 64bit)

			Connectors	Transmitters
For Micrometers	Standard Types	 IP65 	No.02AZF310 	U-WAVE-TMB* No.264-627 Buzzer Type 
	Waterproof-Proof Types	 IP65 		U-WAVE-TMB* No.264-626 IP67 
For Calipers	Standard Types		No.02AZF300 	U-WAVE-TCB* No.264-625 Buzzer Type 
	Coolant-Proof Types	 IP67 	No.02AZF310 	U-WAVE-TCB* No.264-624 IP67 

* U-WAVE-TMB / TCB can only be used in countries that have obtained wireless certification, including the country of purchase. For use in countries other than the country of purchase, please contact our nearest sales office. It is not compatible with the existing product U-WAVE fit because the communication specification is different.

Mitutoyo

Mitutoyo America Corporation



Find additional product literature
and our product catalog

Note: All information regarding our products, and in particular the illustrations, drawings, dimensional and performance data contained in this printed matter as well as other technical data are to be regarded as approximate average values. We therefore reserve the right to make changes to the corresponding designs. The stated standards, similar technical regulations, descriptions and illustrations of the products were valid at the time of printing. In addition, the latest applicable version of our General Trading Conditions will apply. Only quotations submitted by ourselves may be regarded as definitive. Specifications are subject to change without notice.

Mitutoyo products are subject to US Export Administration Regulations (EAR). Re-export or relocation of our products may require prior approval by an appropriate governing authority.

Trademarks and Registrations

Designations used by companies to distinguish their products are often claimed as trademarks. In all instances where Mitutoyo America Corporation is aware of a claim, the product names appear in initial capital or all capital letters. The

Coordinate Measuring Machines
Vision Measuring Systems
Form Measurement
Optical Measuring
Sensor Systems
Test Equipment and Seismometers
Digital Scale and DRO Systems
Small Tool Instruments and Data Management

© 2020 Mitutoyo America Corporation

1.888.610.7664

 www.calcert.com

sales@calcert.com