





All SS Liquid Fillable Gauges

**302L-254/302D-254**

## Applications:

300 Series liquid fillable gauges are designed for industrial applications where the media or the environment contains chemical aggressive substances.

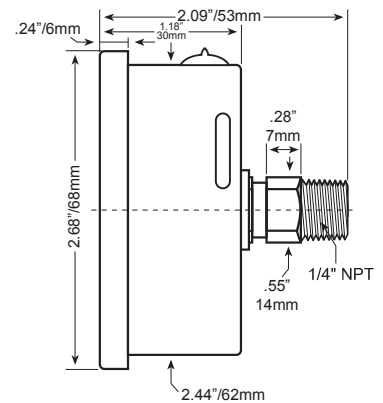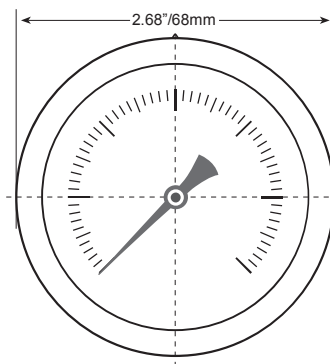

## Specification:

**Model: 302L-254 or 302D-254**

Dial size: 2.5\"/63mm

Case: 304 Stainless Steel

Bezel: 304 Stainless Steel crimped ring

Oil Cap: Blow out plug

Window: Polycarbonate, Glass Optional

Dial: Dished Aluminum, white background, black figures & graduations

Pointer: Aluminum, black finish

Bourdon Tube: 316 stainless steel

Movement: 304 stainless steel

Connection: Stainless Steel, center back mount, 1/4\" NPT male, match with U-clamp socket, G1/4\" BSP

Execution: 302L-254 fill Glycerin, 302D-254 dry but fillable

Accuracy:  $\pm 1.6\%$  of span

Range: Vacuum to 15,000psi

Operating Temperature: Ambient:  $-40+140^{\circ}\text{F}$ , Medium:  $392^{\circ}\text{F}$  Max without liquid fill,  $212^{\circ}\text{F}$   
 $-40+60^{\circ}\text{C}$ , Medium:  $200^{\circ}\text{C}$  Max without liquid fill,  $100^{\circ}\text{C}$

How to order: Model/Pressure Range

See last page in gauge section




All SS Liquid Fillable Gauges

**304L-254/304D-254**

## Applications:

300 Series liquid fillable gauges are designed for industrial applications where the media or the environment contains chemical aggressive substances.

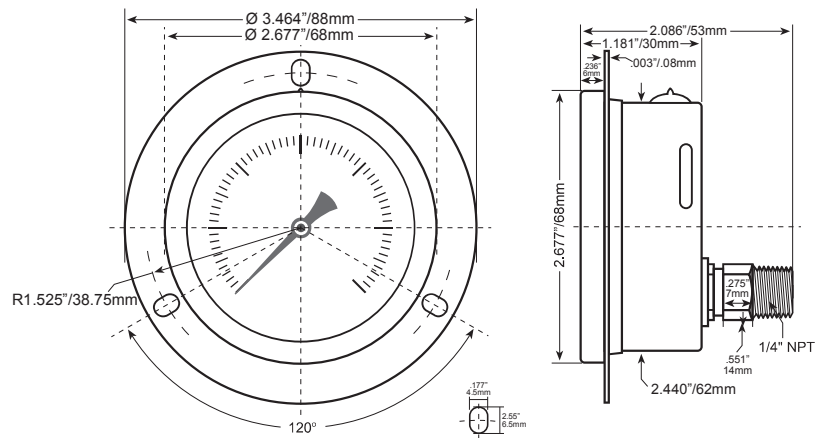

## Specification:

**Model: 304L-254 or 304D-254**

Dial size: 2.5\"/>

Case: 304 Stainless Steel

Bezel: 304 Stainless Steel crimped ring

Oil Cap: Blow out plug

Window: Polycarbonate, Glass Optional

Dial: Dished Aluminum, white background, black figures & graduations

Pointer: Aluminum, black finish

Bourdon Tube: 316 stainless steel

Movement: 304 stainless steel

Connection: Stainless Steel, center back mount, 1/4\"/>

Mounting: Panel mounting with 304 stainless steel front flange

Execution: 304L-254 fill Glycerin, 304D-254 dry but fillable

Accuracy:  $\pm 1.6\%$  of span

Range: Vacuum to 15,000psi

Operating Temperature: Ambient: -40+140°F, Medium: 392°F Max without liquid fill, 212°F  
-40+60°C, Medium: 200°C Max without liquid fill, 100°C

How to order: Model/Pressure Range  
See last page in gauge section