

SeeSnake® microReel Inspection Camera System


The SeeSnake® microReel Camera System allows you to perform inspections quicker and easier than ever. The complete system takes up less than half the space of our popular SeeSnake Compact System while still allowing you to inspect lines up to 100 feet. The interchangeable drum cartridge system allows you to use the same reel to inspect difficult-to-navigate lines from 1 to 3 inches up to 65 feet (optional D30 or D65S "SeeSnake® microDrain™ Reel" Drum).

- **Lightweight and Compact** unit allows you to easily stow and carry the camera in your truck and onto the job site providing an inspection solution whenever and wherever you need it.
- **Multiple Monitor Compatibility** allows you to use your microReel with your SeeSnake monitor or the micro CA-300 Inspection Camera.
- **Durable and Reliable** construction quality that you have come to expect from the RIDGID® SeeSnake name.
- **Interchangeable Drums** let you change out the inner drum depending on the application. Choose from:
 - **L100 and L100C** – 1½ to 4 inch lines with a stiffer push cable allowing you to inspect lines up to 100 feet.
 - **D30 and D65S** – Small diameter with tight turns, 1½" to 3" P-Traps, toilet traps for lines up to 30 feet.



Specifications

	microReel L100/L100C	microDrain D30	microDrain D65S
Camera Head	0.98" (25 mm)	0.86" (22 mm)	0.86" (22 mm)
Cable Length	100' (30 m)	30' (10 m)	65' (20 m)
Cable Diameter	0.27" (6.7 mm)	0.33" (8.3 mm)	0.33" (8.3 mm)
Line Capacity	1.5" to 4" (38 - 100 mm)	1" - 3" (25 - 76 mm)	1" - 3" (25 - 76 mm)
Weight	10.3 lbs. (4.7 kg)	8.6 lbs. (3.9 kg)	9.8 lbs. (4.4 kg)
Length	13.25" (33.7 cm)	13.25" (33.7 cm)	13.25" (33.7 cm)
Width	6.6" (16.8 cm)	6.6" (16.8 cm)	6.6" (16.8 cm)
Height	17.5" (44.5 cm)	17.5" (44.5 cm)	17.5" (44.5 cm)
Resolution	510 x 496 NTSC	510 x 496 NTSC	510 x 496 NTSC
Ball guide	2 included	2 included	2 included
Sonde	512Hz	NA	512Hz
Counter	Optional	NA	NA

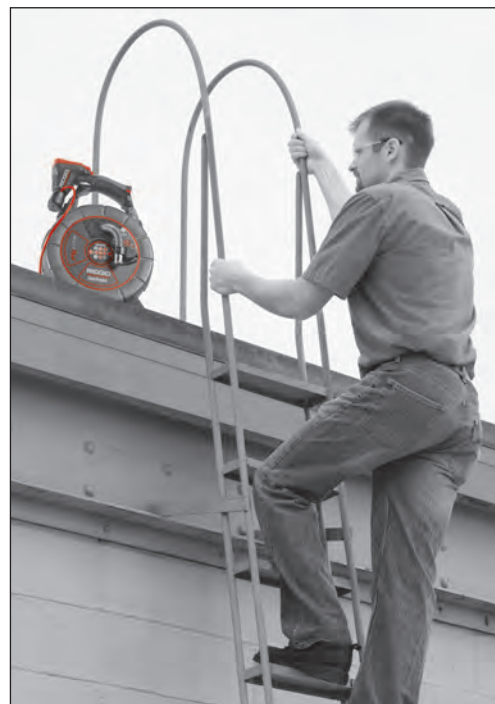

Ordering Information

30' microDrain D30

Catalog No.	Description	Weight		Std Pack
		lbs.	kg	
32663	microDrain D30 Reel (SeeSnake)	7.3	3.3	1
33103	microDrain D30 Reel (micro CA-300)	7.3	3.3	1
40778	microDrain D30/micro CA-300 System	8.6	3.9	1

65' microDrain D65S with Sonde

Catalog No.	Description	Weight		Std Pack
		lbs.	kg	
37468	microDrain D65S Reel (SeeSnake)	9.8	4.4	1
37473	microDrain D65S Reel (micro CA-300)	9.8	4.4	1
40788	microDrain D65S/micro CA-300 System	11.1	5	1

100' microReel L100/L100C

Catalog No.	Description	Weight		Std Pack
		lbs.	kg	
100' microReel L100 w/Sonde				
35133	microReel L100 (SeeSnake)	10.3	4.7	1
35143	microReel L100 (micro CA-300)	10.3	4.7	1
40798	microReel L100/micro CA-300 System	11.6	5.3	1
100' microReel L100C w/Sonde and Counter				
35183	microReel L100C (SeeSnake)	10.3	4.7	1
35188	microReel L100C (micro CA-300)*	10.3	4.7	1
40808	microReel L100C/micro CA-300 System*	11.6	5.3	1

*L100C with micro CA-300 may not have sufficient lighting for 4" Cast Iron and ABS.

Accessories

Catalog No.	Description	Weight		Std Pack
		lbs.	kg	
33108	microReel/microDrain Interconnect Cable (SeeSnake)	0.65	0.3	1
33113	microReel/microDrain Interconnect Cable (micro CA-300)	0.65	0.3	1
35113	microDrain D30 Drum Only	3	1.3	1
37483	microDrain D65S Drum Only	5.3	2.4	1
34623	L100 Drum Only	5.5	2.5	1
35243	L100C Drum Only	5.5	2.5	1



30' to 65' Length
1 to 3 Inch Lines
Optional Sonde



100' Length
1.5 to 4 Inch Lines
Standard Sonde
Optional Counter



The microReel Inspection Camera Is Compatible With The Following CCUs



MINIPak Monitor
Catalog No. 32748

DVD Pak2 Monitor
Catalog No. 33198



LCD Pak Monitor
Catalog No. 37843



**All Larger
SeeSnake® CCUs**



**micro CA-300
Inspection Camera**
Catalog No. 37888

Distributor