


The Series 440 programmable RTD temperature transmitter is a two-wire transmitter with an analog output. It has measurement input for Pt100 resistance thermometers (RTD) in 2 or 3 wire connection. Setting up of the transmitter is done using the 440-CABLE. These small units can be mounted in Pyromation heads or they can be used for surface mounting by using a 35 mm DIN rail mounting clip.

TEMPERATURE HEAD TRANSMITTER

Universal head transmitter for Pt100 resistance thermometers (RTD) settable using a PC, for installation in a sensor head.



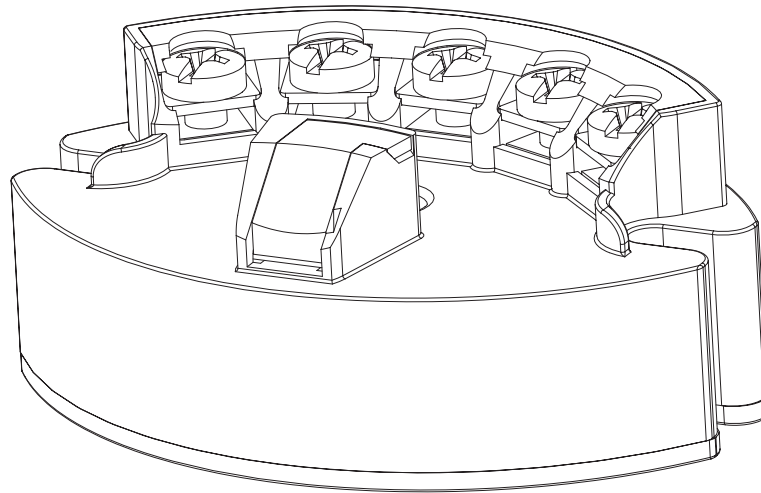


Patent #D350, 596

Application Areas

- PC programmable temperature head transmitter for converting Pt100 input signal into an scaleable (4 to 20) mA analog output signal
- Platinum Resistance thermometer (RTD)
- Online configuration using PC with SETUP connector.

Features and Benefits

- Universally PC programmable for Pt100 signals
- 2 wire technology, (4 to 20) mA analog output
- High accuracy in total ambient temperature range
- Fault signal on sensor break or short circuit
- RFI/EMI Protected, CE marked
-  US UL Recognized Component
-   General Purpose and non-incendive for use in hazardous locations
- Online configuration during measurement using SETUP connector
- Output simulation

Resistance Thermometer Input (RTD)

| TYPE | MEASUREMENT RANGE | MINIMUM RANGE |
|---|---|--|
| Pt100 ($\alpha = 0.00385\text{ }^{\circ}\text{C}^{-1}$) | (-200 to 650) $^{\circ}\text{C}$ [-328 to 1202] $^{\circ}\text{F}$ | 10 $^{\circ}\text{C}$ [18 $^{\circ}\text{F}$] |
| Connection Type | 2 or 3 wire connection cable resistance compensation possible in the 2 wire system (0 to 20) Ω | |
| Sensor cable resistance | maximum 11 Ω per cable | |
| Sensor current | $\leq 0.6\text{ mA}$ | |

Output (Analog)

| | |
|---------------------------|---|
| Output signal | (4 to 20) mA or (20 to 4) mA |
| Transmission as | Temperature linear |
| Maximum load | $(V_{\text{power supply}} - 10\text{ V}) / 0.023\text{ A}$ (current output) |
| Digital filter 1st degree | (0 to 8) s |
| Induced current required | $\leq 3.5\text{ mA}$ |
| Current limit | $\leq 23\text{ mA}$ |
| Switch on delay | 4 s (during power $I_a = 3.8\text{ mA}$) |
| Electronic response time | 1 s |

Failure Mode

| | |
|---------------------------------|---|
| Undershooting measurement range | Decrease to 3.8 mA |
| Exceeding measurement range | Increase to 20.5 mA |
| Sensor breakage/short circuit | $\leq 3.6\text{ mA}$ or $\geq 21.0\text{ mA}$ |

Electronic Connection

| | |
|------------------|--|
| Power supply | $U_b = (10\text{ to }30)\text{ V dc}$, polarity protected |
| Allowable ripple | $U_{ss} \leq 5\text{ V}$ at $U_b \geq 13\text{ V}$, $f_{\text{max}} = 1\text{ kHz}$ |

Resistance Thermometer Accuracy (RTD)

| TYPE | MEASUREMENT ACCURACY |
|----------------------|---|
| Pt100 | 0.2 $^{\circ}\text{C}$ or 0.08% ^[1] |
| Reference conditions | Calibration temperature (23 \pm 5) $^{\circ}\text{C}$ [73 \pm 9] $^{\circ}\text{F}$ |

General Accuracy

| | |
|---------------------------|---|
| Influence of power supply | $\pm 0.01\%/V$ deviation from 24 V ^[2] |
| Load influence | $\pm 0.02\%/100\text{ }\Omega$ ^[2] |
| Temperature drift | $T_a = \pm (15\text{ ppm}/^{\circ}\text{C} \times (\text{range end value} + 200) + 50\text{ ppm}/^{\circ}\text{C} \times \text{measurement range}) \times \Delta\vartheta$ $\Delta\vartheta$ = deviation of the ambient temperature according to the reference condition |
| Long term stability | $\leq 0.1\text{ }^{\circ}\text{C}/\text{year}$ ^[3] or $\leq 0.05\%/year$ ^{[1][3]} |

[1] % is related to the adjusted measurement range (the value to be applied is the greater)

[2] All data is related to a measurement end value of 20 mA

[3] Under reference conditions

ORDER CODES

Unconfigured Order Number: 440-00

Configured Order Number: **4 4 0** - **3 85 U** - **S (50-300) F**

1

| CODE | DESCRIPTION |
|------|--------------|
| 2 | RTD (2-wire) |
| 3 | RTD (3-wire) |

2

| CODE | DESCRIPTION |
|------|--|
| 85 | 100 ohm platinum ($\alpha = 0.00385\text{ }^{\circ}\text{C}^{-1}$) |

3

| CODE | DESCRIPTION |
|------|--|
| U | Upscale Burnout $\geq 21.0\text{ mA}$ |
| D | Downscale Burnout $\leq 3.6\text{ mA}$ |

4

| RANGE |
|-------------------------------|
| S (lower limit – upper limit) |

5

| CODE | DESCRIPTION |
|------|-------------|
| C | Celsius |
| F | Fahrenheit |

Accessories

| CODE | DESCRIPTION |
|---------------|--|
| 440-CABLE | Communication Cable and Software (RS232) |
| 440-CABLE-USB | Communication Cable and Software (USB) |
| 440-DIN35 | 35 mm DIN rail mounting clip |

Environmental Conditions

| | |
|---------------------|---|
| Ambient temperature | (-40 to 85) °C [-40 to 185] °F |
| Storage temperature | (-40 to 100) °C [-40 to 212] °F |
| Climatic class | EN 60 654-1, Class C |
| Condensation | Permitted |
| Shock resistance | 4 g / (2 to 150) Hz according to IEC 60 068-2-6 |
| EMC immunity | Interference immunity and interference emission according to EN 61 326-1 (IEC 1326) |

Mechanical Construction

| | |
|------------|--|
| Dimensions | <p>Dimensions in inches [mm]</p> |
| Weight | Approximately 44 g |
| Materials | Housing: Polycarbonate • Potting: Polyurethane |
| Terminals | 15 AWG (maximum) |

Terminal Connections

| | | |
|--|---------------|---------------------|
| <p>Power supply and current output</p> <p>(10 to 30) V dc (4 to 20) mA</p> | | <p>SETUP socket</p> |
| <p>2-Wire</p> | <p>3-Wire</p> | |

Approvals

| | |
|---|---|
| <p>CE marked</p> <p>UL US</p> <p>FM</p> | <p>Unit complies with the legal requirements set forth by the EU regulations.</p> <p>UL Recognized Component</p> <p>General Purpose and non-incendive for use in hazardous locations Class I, Division 2 Groups A, B, C and D</p> |
|---|---|