



Handle Operating Instructions: MODbox™ Rolling Toolbox 54802MB



STEP 1



STEP 2




STEP 3

To Remove the Telescoping Handle

STEP 1: While facing the backside of the Rolling Toolbox, collapse the handle by depressing the orange button.

STEP 2: Use your index finger and thumb to pull each of the two black tabs located on each of the arms of where the telescoping handle meets the box. Tabs should be pulled until a red indicator reading, "Unlocked" is visible.

STEP 3: Using the center cross brace of the handle, pull up on the handle assembly until it slides out of the receiving slots in the rolling box. Note: if toolbox is empty, you may need to brace it with your foot on the back stowage ledge while pulling up the handle.

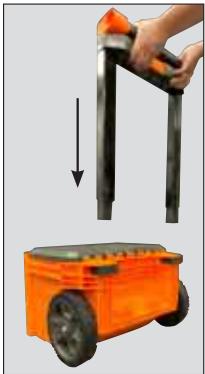

STEP 1



STEP 2



STEP 3 P

To Reattach the Telescoping Handle

STEP 1: Slide the telescoping arms back into their respective slots until fully seated. Ensure the correct side of the handle is facing out. The orange button will be visible from the back.

STEP 2: Use the palm of your hand to push both black tabs back into place, until the red "Unlocked" is no longer visible.

STEP 3: Pull up on the handle until fully extended and handle locks into place.