

M2A STAND ALONE TRANSMITTER



- Operates with or without a controller
- Direct digital readout with OLED cold temperature display
- Available gases include
 - LEL, O2, H2S, CO, CO2, and 100% Vol CH4
 - Toxic gases include NH3, AsH3, Cl2, ClO2, HCN, & SO2
- Infrared sensor for combustibles and CO2
- 4-20 mA & digital Modbus outputs standard
- 2 fully programmable alarm relays & fail relay
- Non-intrusive calibration via magnetic wand
- Explosion proof construction
- Patented water repellent sensor cover
- User friendly setup, push buttons & OLED menus
- Long-life sensors (2 + years typical)

The RKI M2A™ is a state-of-the-art transmitter that can operate as an independent, stand-alone monitor or as part of an integrated system. The M2A connects with an analog or digital signal to virtually any controller, PLC, or DCS. Setup procedures are simplified with user friendly push buttons and OLED menus. It utilizes a magnetic wand technique for performing non-intrusive calibration. The M2A provides an automatic zero drift correction feature, which results in more stable readings and reduces the need for adjustments due to sensor aging.

The housing of the M2A does not need to be opened for zeroing or calibration, making it unnecessary to declassify the area for routine maintenance. It is designed so that a complete field calibration can be performed by one person. Sensor construction is rated Class I, Div. 1 Groups B, C, D for flammables, CO, H2S, O2, and CO2, and Class I, Div. 2 for all other toxics.

The transmitter provides a 4-20 mA output in addition to a Modbus digital output. It also has two levels of alarms with relays, plus a fail alarm with relay. A digital display of the gas concentration, as well as alarm and status lights, can be viewed through the front window.

The toxic sensors are electrochemical type plug-in sensors, which provide high specificity, fast response, and long life. The plug-in design allows quick replacement in the field with no tools required. Toxic sensors are designed for use in Class I, Div. 2 hazardous locations. Sensors available for NH3, AsH3, Cl2, ClO2, HCN, PH3, and SO2

The M2A represents the latest leading edge technology in sensor / transmitters today.

World Leader In Gas Detection & Sensor Technology

Explosion Proof

Class I, Div. 1 , Groups B, C, D

		Combustibles		LEL H2 Specific	O2 Oxygen	H2S Hydrogen Sulfide	CO Carbon Monoxide	CH4 Methane	HC Hydrocarbons	CO2 Carbon Dioxide											
		LEL	PPM																		
Part #		65-2640RK	65-2647RK	65-2641RK	65-2643RK-05	65-2645RK-05	65-2646RK-05	65-2649RK-CH4 65-2658RK-CH4	65-2649RK-HC	65-2660RK-02 65-2660RK-03 65-2660RK-05 65-2660RK-10											
Sensors		Catalytic			Galvanic cell	Electrochemical		Infrared													
Measuring Ranges		0 - 100% LEL	0 - 9000 ppm CH4	0 - 100% LEL	0 - 25.0% Vol.	0 - 100 ppm	0 - 300 ppm	0 - 100% LEL 0 - 100% Vol.	0 - 100% LEL	-02 0 - 5000 ppm -03 0 - 5% Vol. -05 0 - 50% Vol. -10 0 - 100% Vol.											
Resolution		1% LEL	20 ppm	1% LEL	0.1% Vol.	1 ppm		1% LEL / 1% Vol.		20 ppm / 0.01% Vol / 0.1% Vol. / 1% Vol.											
Lower Detectable Limit (LDL)		2% of full scale			0.1% Vol.	2% of full scale															
Max Current Draw (24VDC)		160 mA with alarm 1 and alarm 2 active and all relays energized			125 mA with alarm 1 and alarm 2 active and all relays energized			160 mA with alarm 1 and alarm 2 active and all relays energized													
Response Time (T-90)		35 Seconds or less			90 Seconds or less	60 Seconds or less	90 Seconds or less	30 Seconds or less													
Life Expectancy		2 to 3 years with normal service	3 to 5 years with normal service	2 to 3 years with normal service			5 years plus with normal service														
Accuracy (which ever is greater)		± 5% of reading or ± 2% of full scale			± 0.5% Vol. O2	± 5% of reading or ± 2 ppm H2S	± 5% of reading or ± 5 ppm CO	± 5% of reading or ± 2 % of full scale													
Weather Resistant		Patented water repellent sensor coating																			
Alarms																					
Alarm Settings		Two fully programmable alarm set points, increasing / decreasing, latching / self-resetting, on delays, off delays, normally energized or de-energized																			
Alarm Indication		Visual LEDs. Alarm 1, Amber; Alarm 2, Red; Fail, Red																			
Relays		5 amp form 'C' contacts for alarm 1, alarm 2, and fail																			
Physical																					
Dimensions		Height: 8.5" (215 mm), Width: 5.2" (132 mm), Depth: 4.5" (114 mm)																			
Display		Alphanumeric OLED display. 8 characters per line; 2 lines for gas concentration readout, plus user-friendly calibration and setup																			
Enclosure		Explosion proof for Class I, Div 1, Groups B, C, D.																			
Enclosure Rating		NEMA 4X, explosion proof, watertight, cast aluminum with o-ring seal and epoxy powder coating																			
Controls		Magnet used for calibration functions. Calibrates without opening the housing. Internal push-button controls also available for calibration and setup																			
Operating Environment																					
Operating Temperature		-40°F to 167°F -40°C to 75°C	-4°F to 113°F -20°C to 45°C	-40°F to 104°F -40°C to 40°C	23°F to 104°F -5°C to 40°C	-40°F to 122°F -40°C to 50°C															
Relative Humidity		5 - 95% RH non-condensing																			
Location		Indoor or outdoor. Explosion proof for Class I, Div. 1, Groups B, C, D.																			
Operating Voltage		10 VDC - 30 VDC																			
Outputs																					
Analog		Linear 4-20 mA signal, into 1000 ohms impedance max (24DC), 0 - 500 ohms max (12VDC) corresponding to 0 - full scale																			
Digital		Modbus RTU output standard, fully configurable, 2-wire RS-485, 1200 to 19.2k baud																			
Approvals	65-2640RK UL	65-2641RK UL	C CSA US				C UL US														
	65-2640RK-05 C CSA US	65-2641RK-05 C CSA US																			
Controllers	Beacon 110, Beacon 200, Beacon 410A, Beacon 800 as well as most DCS / PLC systems																				
Warranty	One year material and workmanship																				

Toxic Gas Transmitters

Class I, Div. 2

	O2 Oxygen	H2S Hydrogen Sulfide	CO Carbon Monoxide	Toxics See Chart Below	CO2 Carbon Dioxide
 Part#	65-2666RK *65-2644RK	65-2662RK	65-2663RK	See Chart Below	65-2661RK-02 65-2661RK-03 65-2661RK-05 65-2661RK-10
Sensors	Galvanic cell	Electrochemical		Infrared	
Measuring Ranges	0-25% Vol.	0-100 ppm	0-300 ppm	See Chart Below	-02 0 - 5000 ppm -03 0 - 5% Vol. -05 0 - 50% Vol. -10 0 - 100% Vol.
Resolution	0.1% Vol.	1 ppm		See Chart Below	20 ppm / 0.01% Vol. / 0.1% Vol. / 1%Vol.
Lower Detectable Limit (LDL)	0.1% Vol.	2% of full scale			
Response Time (T-90)	35 Seconds or less		60 Seconds or less	30 Seconds or less	
Max Current Draw (24VDC)	125 mA with alarm 1 and alarm 2 active and all relays energized			160 mA with alarm 1 and alarm 2 active and all relays energized	
Life Expectancy	2 to 3 years with normal service			5 years plus	
Accuracy (which ever is greater)	± 0.5% Vol. O2	± 5% of reading or ± 2 ppm H2S	± 5% of reading or ± 5 ppm CO	± 10% of reading or ± 5% of full scale	± 5% of reading or ± 2% of full scale
Alarms					
Alarm Settings	Two fully programmable alarm set points, increasing / decreasing, latching / self-resetting, on delays, off delays, normally energized or de-energized,				
Alarm Indication	Visual LEDs. Alarm 1=Amber; Alarm 2=Red; Fail=Red				
Relays	5 Amp form 'C' contacts for alarm 1, alarm 2, and fail				
Physical					
Dimensions	Height: 8.5" (215 mm), Width: 5.2" (132 mm), Depth: 4.5" (114 mm)				
Display	Alphanumeric OLED display. 8 characters per line; 2 lines for gas concentration readout, plus user-friendly calibration and setup				
Sensor Rating	Non explosion proof construction, designed for Class I, Div. 2, Groups B, C, D (no certification)				
Housing J-Box	NEMA 4X, explosion proof, watertight, cast aluminum with o-ring seal and epoxy powder coating				
Controls	Magnet used for calibration functions. Calibrates without opening the housing. Internal push-button controls also available for calibration and setup				
Sensor	Aluminum / Plastic (non explosion proof)				
Operating Environment					
Operating Temperature	-4°F to 113°F -20°C to 45°C	-40°F to 104°F -40°C to 40°C	23°F to 104°F -5°C to 40°C	14°F to 104°F -10°C to 40°C	-40°F to 122°F -40°C to 50°C
Relative Humidity	5 - 95% RH non-condensing				
Location	Indoor or outdoor				
Operating Voltage	10 VDC - 30 VDC				
Outputs					
Analog	Linear 4-20 mA signal, into 1000 ohms impedance max (24DC), 0 - 500 ohms max (12VDC) corresponding to 0 - full scale				
Digital	Modbus RTU output standard, fully configurable, 2-wire RS-485, 1200 to 19.2k baud				
Controllers	Beacon 110, Beacon 200, Beacon 410A, Beacon 800 as well as most DCS / PLC systems				
Warranty	One year materials and workmanship				

*Partial pressure sensor for helium (He) applications. Consult factory for details.

		M2A Toxic Transmitter Sensor Ordering Information				
		Part Number With J-Box	Gas	Range	Resolution	Sensor Type
ESM-01	 CT-7	65-2670RK-NH3-75	Ammonia (NH3)	0 - 75.0 ppm	0.1 ppm	CT-7
		65-2670-NH3-1	Ammonia (NH3)	0 - 100 ppm	1 ppm	CT-7
		65-2670-NH3-2	Ammonia (NH3)	0 - 200 ppm	1 ppm	CT-7
		65-2670-NH3-5	Ammonia (NH3)	0 - 500 ppm	1 ppm	CT-7
		65-2648RK-AsH3	Arsine (AsH3)	0 - 1.50 ppm	0.1 ppm	ESM -01
		65-2670RK-CL2-3	Chlorine (Cl2)	0 - 3.00 ppm	0.01 ppm	CT-7
		65-2670RK-CL2-10	Chlorine (Cl2)	0 - 10.0 ppm	0.1 ppm	CT-7
		65-2670RK-CLO2	Chlorine Dioxide (ClO2)	0 - 1.00 ppm	0.01 ppm	CT-7
		65-2648RK-HCN	Hydrogen Cyanide (HCN)	0 - 15.0 ppm	0.1 ppm	ESM -01
		65-2648RK-PH3	Phosphine (PH3)	0 - 1.00 ppm	0.01 ppm	ESM -01
		65-2648RK-SO2	Sulfur Dioxide (SO2)	0 - 6.00 ppm	0.01 ppm	ESM -01

* Sensor being phased out, use CT-7 type when possible.



www.calcert.com

sales@calcert.com

1.888.610.7664


AVAILABLE ACCESSORIES



Remote Mount
Calibration Adaptor



Flow through adaptors

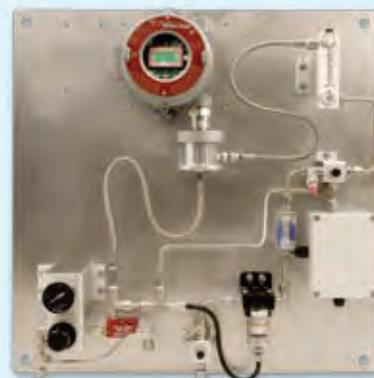

Air aspirator adaptors / panels



Remote horns & lights



Calibration adaptors



Calibration kits

Direct Interface with Beacon 110 / 200 / 410A / 800 Controllers

M2A Wiring Matrix				
Number of Wires to Controller	Maximum Distance to Controller			14 AWG wire
	18 AWG wire	16 AWG wire	14 AWG wire	
M2A Transmitter	3	2500 ft.	5,000 ft.	8,000 ft.

