



FLIR T500-SERIES™

Professional Thermal Imaging Camera

The FLIR T530 and T540 are designed to support engineers and researchers with resolution, speed, and flexibility. These uncooled infrared cameras offer precision measurement and crisp, vibrant imagery enhanced through UltraMax® technology and the exacting detail of Macro Mode. And thanks to a new ergonomic design and intuitive, rapid-response interface, T500-Series cameras can increase efficiency and help reduce test times.

COMPREHENSIVE PRECISION ANALYSIS

Measure temperature with the sensitivity and detail needed for fast identification of faults and thermal gradients

- Sensitive enough to detect temperature differences smaller than 0.03°C
- Built-in Macro Mode measures components down to 71 µm/pixel* spot size, or 50 µm/pixel* with a macro lens (available in 2018)
- Quantify heat generation and thermal dissipation up to 1500°C

REDUCE TEST TIMES

Set up, start testing, then analyze thermal data quickly thanks to streamlined user features and analysis tools

- Start measuring quickly and easily thanks to intuitive GUI and menus
- Radiometric data streaming over USB or Wi-Fi lets you skip straight from testing to analysis
- Analyze and share data through FLIR Tools+, or gain more in-depth analysis with FLIR ResearchIR software

OUTSTANDING IMAGE CLARITY


Build client trust through sharp, brilliant images that are easy for non-expert clients to interpret

- Produce stand-out 464 x 348 pixel IR imagery, or enhance to 645,888 pixels thorough UltraMax® processing*
- Help non-expert clients interpret images by adding perspective with FLIR's proprietary MSX® image enhancements
- Ensure tack-sharp focus for crisp imagery by using the precise laser-assisted autofocus

**Model T540 only*



Ease of operation and ergonomic design make the T500 series an essential tool for product development and research

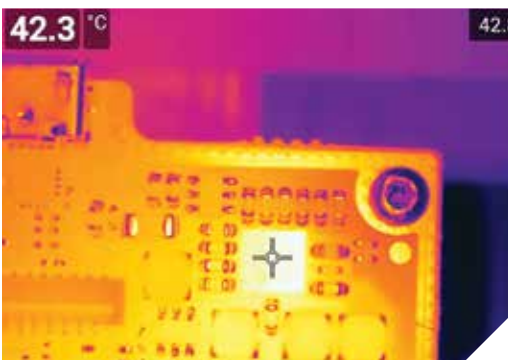

71 µm/pixel spot size performance, for accurate readings on small targets

Specifications

Features by Camera		T530	T540
IR Resolution	320 x 240 (76,800 pixels)		464 x 348 (161,472 pixels)
UltraMax® Resolution	307,200 effective pixels		645,888 effective pixels
Object Temperature Range	-20°C to 120°C (-4°F to 248°F) 0°C to 650°C (32°F to 1202°F) Optional Calibration: 300°C to 1200°C (572°F to 2192°F)		-20°C to 120°C (-4°F to 248°F) 0°C to 650°C (32°F to 1202°F) 300°C to 1500°C (572°F to 2732°F)
Digital Zoom	1-4x continuous		1-6x continuous
Common Features			
Detector Type and Pitch	Uncooled microbolometer, 17 µm		
Thermal Sensitivity/NETD	<30 mK @ 30°C (42° lens)		
Spectral Range	7.5 - 14.0 µm		
F-Number	f/1.1 (42° lens), f/1.3 (24° lens), f/1.5 (14° lens)		
Minimum Focus Distance	42° lens – 0.15 m 24° lens – 0.15 m 14° lens – 1.0 m		
Macro Mode	24° lens option / 103 µm effective spot size	24° lens option / 71 µm effective spot size	
Lens Identification	Automatic		
Focus	Continuous with laser distance meter (LDM), one-shot LDM, one-shot contrast, manual		
Image Frequency	30 Hz		
Programmable Buttons	2		
Image Presentation and Modes			
Display	4", 640 x 480 pixel touchscreen LCD with auto-rotation		
Digital Camera	5 MP, with built-in LED photo/video lamp		
Color Palettes	Iron, Gray, Rainbow, Arctic, Lava, Rainbow HC		
Image Modes	Infrared, visual, MSX®, Picture-in-Picture, optional Macro Mode		
Picture-in-Picture	Resizable and movable		
UltraMax®	Image processing that quadruples pixel count		
Measurement and Analysis			
Accuracy	±2°C (±3.6°F) or ±2% of reading for ambient temperature 15°C to 35°C (59°F to 95°F) and object temperature above 0°C (32°F)		
Spotmeter and Area	3 ea. in live mode		
Measurement Presets	No measurement, center spot, hot spot, cold spot, User Preset 1, User Preset 2		
Laser Pointer	Yes		
Laser Distance Meter	Yes; dedicated button		
Annotations			
Voice	60 sec. recording added to still images or video via built-in mic (has speaker) or via Bluetooth		
Text	Predefined list or touchscreen keyboard		
Image Sketch	From touchscreen, on infrared image only		
GPS	Automatic GPS image tagging		
METERLiNK®	Yes		
Image Storage			
Storage Media	Removable SD card		
Image File Format	Standard JPEG with measurement data included		
Time Lapse (Infrared)	10 sec to 24 hrs		

Video Recording and Streaming	
Radiometric IR Video Recording	Real-time radiometric recording (.csq)
Non-Radiometric IR or Visual Video	H.264 to memory card
Radiometric IR Video Streaming	Yes, over UVC or Wi-Fi
Non-Radiometric IR Video Streaming	H.264 or MPEG-4 over Wi-Fi MJPEG over UVC or Wi-Fi
Communication Interfaces	USB 2.0, Bluetooth, Wi-Fi
Video Out	DisplayPort over USB Type-C
Additional Data	
Battery Type	Li-ion battery, charged in camera or on separate charger
Battery Operating Time	Approx. 4 hours at 25°C (77°F) ambient temperature and typical use
Operating Temperature Range	-15°C to 50°C (5°F to 122°F)
Storage Temperature Range	-40°C to 70°C (-40°F to 158°F)
Shock/Vibration/Encapsulation; Safety	25 g / IEC 60068-2-27, 2 g / IEC 60068-2-6, IP 54; EN/UL/CSA/PSE 60950-1
Weight/Dimensions	1.3 kg (2.9 lbs), 140 x 201 x 84 mm (5.5 x 7.9 x 3.3 in)
Box Contents	
Packaging	Infrared camera with lens, 2 batteries, battery charger, neck strap, hard transport case, lanyards, front lens cap, power supply for battery charger, printed documentation, 8 GB SD card, cables (USB 2.0 A to USB Type-C, USB Type-C to HDMI, USB Type-C to USB Type-C)

CORPORATE HEADQUARTERS
FLIR Systems, Inc.
27700 SW Parkway Ave.
Wilsonville, OR 97070
PH: +1 877.773.3547

NASHUA
FLIR Systems, Inc.
9 Townsend West
Nashua, NH 03063
USA
PH: +1 866.477.3687

CANADA
FLIR Systems, Ltd.
920 Sheldon Court
Burlington, ON L7L 5K6
Canada
PH: +1 800.613.0507

LATIN AMERICA
FLIR Systems Brasil
Av. Antonio Bardella, 320
Sorocaba, SP 18085-852
Brasil
PH: +55 15 3238 7080

www.flir.com
NASDAQ: FLIR

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2017 FLIR Systems, Inc. All rights reserved. 08/16/17
17-0883-INS

CHINA
FLIR Systems Co., Ltd
Rm 1613-16, Tower II
Grand Central Plaza
138 Shatin Rural Committee Road
Shatin, New Territories
Hong Kong
Phone: +852 2792 8955

UK
FLIR Systems Ltd
2 Kings Hill Avenue
West Malling, Kent
ME19 4AQ
United Kingdom
Phone: +44.1732.220011

BELGIUM
FLIR Systems, Inc.
Luxemburgstraat 2
2321 Meer, Belgium
PH: +32 (0) 3665 5100