

Mid-West[®] Instrument

*Ultimate Backflow Test Kits
Over 30 Years of Input from
Backflow Technicians*



Backflow Prevention Assembly Test Kit

"MODEL 845-5"

The 845 is in the list of Acceptable gages from Both FCCC & HR-USC and CA-NV AWWA

Functions and Applications:

Backflow Test Kits provide the capability for testing all brands of **Reduced Pressure Principle, Pressure Vacuum Breaker, Spill Resistant Vacuum Breaker** and **Double Check Valve** backflow prevention assemblies.

ΔP RANGE: 0-15 PSID / 0-100 KPA




New Manifold Design

Product Features/Benefits

- Over 30 Years of Input from Backflow Technicians
- (5) Valve Test Kit
- Specially Designed for Testing Backflow Prevention Assemblies
- Soft-Seated Brass Needle Valves (with replaceable valve seats)
- Test kit is protected with 90 micron filters to minimize plugging with scale, sand, etc. Filter elements can be cleaned or replaced
- Durable Molded Plastic Carrying Case
- Improved Case with Storage Compartments for Fittings & Tools.
- Test procedures are laminated in clear plastic
- 5 Year Warranty

Specifications

- Gauge Type Diaphragm Differential Pressure
- Dial Size & Range (4 ½") 0-15 PSID / 0-100 KPA
- Differential Pressure Accuracy $\pm .2$ P.S.I.D. (Descending)
- Working Pressure: 200 PSIG
- Body Material: Glass Reinforced Engineering Thermoplastic.
- Wetted Internals: EP Elastomers, Brass and 316 S.S. Metal Parts
- Line Pressure Gauge: 1 ½" 0-200 PSIG
- Hoses & End Fittings: Buna-N jacket and liner. Schrader ¼" brass coupler -
- Hose Length: Three (3) each / 5' long (color-coded).
- Bleed Tube, One each / 4' long clear bleed tube.
- Adaptor Fittings: (3) sets of brass fittings provided for hookup to all standard size test cocks.
- Gauge Weight: 3.6lbs / 1.6kg
- Case: Durable Molded Plastic
- Size: 18 ½" L x 9"W x 9 ¾" H
- Temperature Limitations: Maximum 150°F/65°C.
FREEZING TEMPERATURES MUST BE AVOIDED

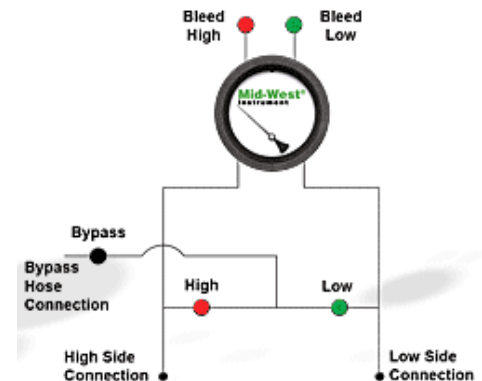

Capable of performing all known test procedures including those recommended by ASSE, AWWA, CSA, FCCC and HR-USC and NEWWA.

Mid-West[®] Instrument

*Ultimate Backflow Test Kits
Over 30 Years of Input from
Backflow Technicians*



Backflow Prevention Assembly Test Kit

"MODEL 845-3"

The 845-3 is in the list of Acceptable gages from Both FCCC & HR-USC and CA-NV AWWA

Functions and Applications:

Backflow Test Kits provide the capability for testing all brands of **Reduced Pressure Principle, Pressure Vacuum Breaker, Spill Resistant Vacuum Breaker** and **Double Check Valve** backflow prevention assemblies.

ΔP RANGE: 0-15 PSID / 0-100 KPA



Product Features/Benefits

- Over 30 Years of Input from Backflow Technicians
- (3) Valve Test Kit
- Specially Designed for Testing Backflow Prevention Assemblies
- Soft-Seated Brass Needle Valves (with replaceable valve seats)
- Test kit is protected with 90 micron filters to minimize plugging with scale, sand, etc. Filter elements can be cleaned or replaced
- Portable / Removable from Case
- Durable Molded Plastic Carrying Case
- Improved Case with Storage Compartments for Fittings & Tools.
- Test Procedures are Laminated in Clear Plastic
- **5 Year Warranty**

Specifications

- Gauge Type Diaphragm Differential Pressure
- Dial Size & Range (4 ½") 0-15 PSID / 0-100 KPA
- Differential Pressure Accuracy ± .2 P.S.I.D. (Descending)
- Working Pressure: 200 PSIG
- Body Material: Glass Reinforced Engineering Thermoplastic.
- Wetted Internals: EP Elastomers, Brass and 316 S.S. Metal Parts
- Line Pressure Gauge: 1 ½" 0-200 PSIG
- Hoses & End Fittings: Buna-N jacket and liner. Schrader ¼" brass coupler -
- Hose Length: Three (3) each / 5' long (color-coded).
- Adaptor Fittings: (3) sets of brass fittings provided for hookup to all standard size test cocks.
- Gauge Weight: 3.3lbs / 1.5kg
- Case: Durable Molded Plastic
- Size: 18 ½" L x 9"W x 9 ¾" H
- Temperature Limitations: Maximum 150°F/65°C.
FREEZING TEMPERATURES MUSTBE AVOIDED



Capable of performing all known test procedures including those recommended by ASSE, AWWA, CSA, FCCC and HR-USC and NEWWA.