

## Mineral Insulated (MI)

Watlow's mineral insulated (MI) thermocouples are fast-responding, durable and capable of handling high temperatures.

Manufactured with best-in-class XACTPAK®, Watlow's trademark for metal sheathed, mineral insulated (MI) thermocouple material, XACTPAK responds fast because the protective metal outer sheath allows use of smaller diameter thermocouple conductors. The rock hard compacted MgO insulation further enhances the sensor's ability to "read" temperature by transferring heat quickly to the measuring junction.

The XACTPAK protecting sheath and compacted insulation outperform bare wire thermocouples in most applications.

### Performance Capabilities

- Easily handles temperatures up to 2200°F (1200°C)
- Meets or exceeds initial calibration tolerances per ASTM E 230

### Features and Benefits

#### Special mineral insulation

- Protects thermocouple from moisture and thermal shock
- Permits operation in high temperature, high pressure environments

#### Diameters as small as 0.020 in. (0.50 mm)

- Ideal when physical space or extremely fast response are critical

#### Flexibility of the XACTPAK material

- Allows forming and bending of the thermocouple, without risk of cracking, to meet design requirements

#### Outer sheath

- Protects wires from oxidation and hostile environments

#### Wide range of sheath materials, diameters and calibrations

- Meet specific requirements

#### In-house manufacturing of XACTPAK material

- Rigid quality control procedures
- Ensures high standards are met
- Single source reliability

#### Custom capabilities

- Include options such as special lead lengths, lead wires and terminations



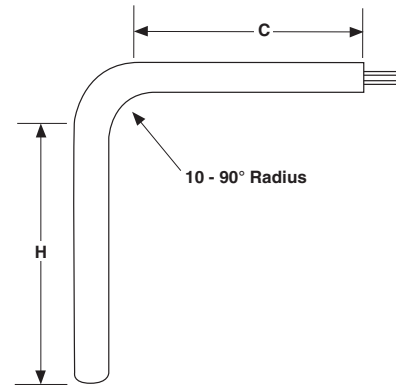
### Typical Applications

- Heat treating
- Furnaces/kilns
- Turbines
- Bearing temperature
- Power stations
- Steam generators
- Diesel engines
- Nuclear reactors
- Atomic research
- Jet engines and test cells
- Rocket engines
- Semiconductor manufacturing
- Refineries/oil processing
- Catalytic reformers
- Food processing









## Mineral Insulated

### Bends

| Diameter<br>in. | Standard Bend<br>Radius<br>in. | Minimum "H"<br>Dimension<br>in. | Minimum "C"<br>Dimension<br>in. |
|-----------------|--------------------------------|---------------------------------|---------------------------------|
| 0.063           | 3/16                           | 1/2                             | 1 1/2                           |
| 0.090           | 1/4                            | 3/4                             | 1 1/2                           |
| 0.125           | 3/8                            | 1                               | 2                               |
| 0.188           | 1/2                            | 1                               | 2                               |
| 0.250           | 3/4                            | 2                               | 2                               |
| 0.313           | 1 1/4                          | 2                               | 2                               |
| 0.375           | 1 1/2                          | 3                               | 2                               |
| 0.500           | 2                              | 4                               | 2                               |



### Lead Terminations

| Termination   | Code | Length |
|---|------|--------|
| <br><b>Standard Male Plug</b>                          | A    | —      |
| <br><b>Standard Female Jack</b>                       | B    | —      |
| <br><b>Standard Male Plug with Mating Connector</b>  | C    | —      |
| <br><b>Miniature Male Plug</b>                       | F    | —      |
| <br><b>Miniature Female Jack</b>                     | G    | —      |
| <br><b>Miniature Male Plug with Mating Connector</b> | H    | —      |
| <br><b>Split Leads</b>                               | T    | 1 1/2  |
| <br><b>#8 Spade Lugs</b>                             | U    | 1 1/2  |







## Mineral Insulated

### Fitting Options

#### Fixed Fittings

| Fitting Type  | Material | Sheath Size in. | NPT Thread Size in. | Hex Size in. | Length in. | Code |
|---|----------|-----------------|---------------------|--------------|------------|------|
| <br><b>Fixed Single Thread 1/8 NPT</b><br>Customer Specified | 303 SS   | 0.063 to 0.250  | 1/8                 | 7/16         | 1 1/16     | A    |
| <br><b>Fixed Single Thread 1/4 NPT</b><br>Customer Specified | 303 SS   | 0.125 to 0.250  | 1/4                 | 9/16         | 7/8        | B    |
| <br><b>Fixed Single Thread 1/2 NPT</b><br>Customer Specified | 303 SS   | 0.125 to 0.250  | 1/2                 | 7/8          | 1          | D    |
| <br><b>Fixed Double Thread 1/2 NPT</b><br>Customer Specified | 303 SS   | 0.125 to 0.250  | 1/2                 | 7/8          | 1 3/4      | F    |

#### Compression Fittings


| Fitting Type  | Material | Sheath Size in. | NPT Thread Size in. | Hex Size in. | Length in. | Code |
|---|----------|-----------------|---------------------|--------------|------------|------|
| <br><b>Non-Adjustable Compression Brass</b>  | Brass    | 0.125           | 1/8                 | 1/2          | 1          | J    |
|   |          | 0.188           | 1/8                 | 1/2          | 1 1/8      | J    |
|   |          | 0.250           | 1/8                 | 1/2          | 1 3/16     | J    |
| <br><b>Non-Adjustable Compression SS</b>     | 303 SS   | 0.063           | 1/8                 | 1/2          | 1 1/4      | L    |
|   |          | 0.125           | 1/8                 | 1/2          | 1 1/4      | L    |
|   |          | 0.188           | 1/8                 | 1/2          | 1 5/16     | L    |
|   |          | 0.250           | 1/8                 | 1/2          | 1 5/16     | L    |
| <br><b>Adjustable Compression TFE Gland</b>  | 303 SS   | 0.063           | 1/8                 | 1/2          | 1 1/4      | G    |
|   |          | 0.125           | 1/8                 | 1/2          | 1 1/4      | G    |
|   |          | 0.188           | 1/8                 | 1/2          | 1 1/4      | G    |
|   |          | 0.250           | 1/4                 | 7/8          | 2 7/16     | X    |
| <br><b>Adjustable Compression Lava Gland</b> | 303 SS   | 0.063           | 1/8                 | 1/2          | 1 1/4      | Q    |
|   |          | 0.125           | 1/8                 | 1/2          | 1 1/4      | Q    |
|   |          | 0.188           | 1/8                 | 1/2          | 1 1/4      | Q    |
|   |          | 0.250           | 1/4                 | 7/8          | 2 7/16     | V    |

**Compression Fittings:** Compression fittings are shipped finger-tight on the sheath allowing field installation. Once non-adjustable fittings are deformed, they cannot be relocated. Adjustable fittings come with tetrafluorethylene (TFE) sealant or lava sealant glands.


## Mineral Insulated

### Fitting Options (Continued)



#### Adjustable Spring Loaded

| Fitting Type  | Material | Sheath Size in. | NPT Thread Size in. | Hex Size in. | Length in. | Code |
|---|----------|-----------------|---------------------|--------------|------------|------|
|  | 316 SS   | 0.250           | 1/2                 | 7/8          | 2          | H    |

## Bayonet Lockcap and Spring

| Fitting Type  | Material     | Sheath Size in. | Length in.                    | Code |
|---|--------------|-----------------|-------------------------------|------|
|  | Plated Steel | 0.125           | 1 <sup>5</sup> / <sub>8</sub> | W    |
|   | Plated Steel | 0.188           | 1 <sup>5</sup> / <sub>8</sub> | W    |
|   | Plated Steel | 0.063           | 1 <sup>5</sup> / <sub>8</sub> | W    |


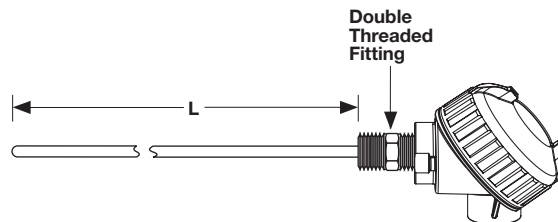
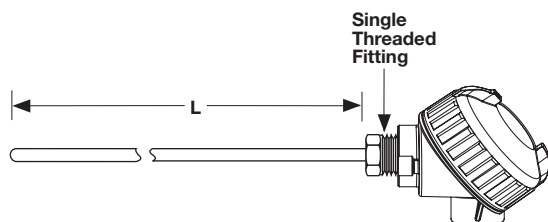
## Weld Pads

| Weld Pad Type  | Material | Code |
|--|----------|------|
|  <p>Flat</p>        | 304 SS*  | 2    |
|  <p>Milled Slot</p> | 304 SS   | 5    |


\*Alloy 600 available on special order and recommended for use with alloy 600 sheath.

## Mineral Insulated


### Connection Head Style AR



Type D (Small Cast Iron) or  
E (Small Aluminum)



Type H (Explosion Proof)



Type C (Polypropylene)

## Ordering Information

### Part Number

| ① | ② | ③<br>Sheath<br>O.D.<br>(in.) | ④<br>Connection<br>Head | ⑤<br>Head<br>Mounting<br>Fittings | ⑥ | ⑦<br>Sheath<br>Material | ⑧ ⑨<br>Sheath<br>Length "L"<br>(whole in.) | ⑩<br>Sheath<br>Length "L"<br>(fract. in.) | ⑪<br>Junction | ⑫<br>Calibration | ⑬ ⑭ | ⑮ |
|---|---|------------------------------|-------------------------|-----------------------------------|---|-------------------------|--|---|---------------|------------------|-----|---|
| A | R |                              |                         |                                   | 0 |                         |  |   |               |                  | 00  | 0 |

| ③ Sheath O.D. (in.) |       |
|---------------------|-------|
| G =                 | 0.125 |
| H =                 | 0.188 |
| J =                 | 0.250 |

| ④ Connection Head |                               |
|-------------------|-------------------------------|
| C =               | Polypropylene                 |
| D =               | Small cast iron               |
| E =               | Small aluminum                |
| H =               | Explosion proof               |
| U =               | E head with 5750 transmitter* |
| V =               | C head with 5750 transmitter* |
| W =               | H head with 5750 transmitter* |

\* For units with a transmitter, the order must specify a temperature range and °F or °C.

| ⑤ Head Mounting Fittings |  |
|--------------------------|--|
| 0 =                      | Single threaded 303 SS                           |
| F =                      | Double threaded 303 SS 1/2 in. NPT               |
| H* =                     | Spring loaded double threaded 316 SS 1/2 in. NPT |

\*0.250 in. diameter only

| ⑦ Sheath Material |                    |
|-------------------|--------------------|
| A =               | 304/304L SS        |
| F =               | 316/316L SS        |
| Q =               | Alloy 600 (Type K) |

| ⑧ ⑨ Sheath Length "L" (whole in.)                                       |  |
|---|--|
| Available lengths: 01 to 99, for lengths over 99 inches contact factory |  |

| ⑩ Sheath Length "L" (fractional in.) |     |
|--------------------------------------|-----|
| 0 =                                  | 0   |
| 1 =                                  | 1/8 |
| 2 =                                  | 1/4 |
| 3 =                                  | 3/8 |
| 4 =                                  | 1/2 |
| 5 =                                  | 5/8 |
| 6 =                                  | 3/4 |
| 7 =                                  | 7/8 |

| ⑪ Junction |          |              |              |
|------------|----------|--------------|--------------|
|            | Grounded | Ungrounded   | Exposed      |
| Single     | G        | U            | E            |
| Dual       | H        | W (isolated) | D (isolated) |

| ⑫ Calibration   |   |   |   |   |
|-----------------|---|---|---|---|
|                 | E | J | K | T |
| Standard limits | E | J | K | T |
| Special limits  | 2 | 3 | 4 | 8 |