
A RATED 1000 VAC X 1500 VDC

Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

## Fully Insulated - 1000V Rated Adjustable Wrenches



- Wide capacity jaw allows each tool to work with more fastener sizes
- Wider handle provides more comfort and less stress to the hand
- Tension spring stablilizes jaw and allows easy adjustment of knurled adjustment knob
- Allov steel and heat treated
- Proportioned dimensions for greatest strength and minimum weight
- Fully insulated adjustable wrench with NO exposed metal for complete 1000V Protection

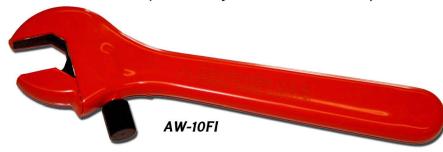

 $PN_{-}$ DESC AW-6FI......6" O.A.L. - .94" Opening AW-8FI......8" O.A.L. - 1.13" Opening AW-10FI...... 10" O.A.L. - 1.31" Opening AW-10FI-ST. 10" With Loop AW-12FI......12" O.A.L. - 1.56" Opening AW-15FI......15" O.A.L. - 1.75" Opening

## Insulated - Non-Voltage Rated Adjustable Wrenches

- Wide capacity jaw allows each tool to work with more fastener sizes
- Wider handle provides more comfort and less stress to the hand
- Tension spring stablilizes jaw and allows easy adjustment of knurled adjuster
- Alloy steel and heat treated
- Proportioned dimensions for greatest strength and minimum weight



\_\_DESC\_ AW-4...... 4" O.A.L. - .69" Opening AW-6..... 6" O.A.L. - .94" Opening AW-6-C... 6" Chrome AW-8...... 8" O.A.L. - 1.13" Opening AW-8-C... 8" Chrome AW-10..... 10" O.A.L. - 1.31" Opening AW-10-C..10" Chrome AW-12..... 12" O.A.L. - 1.56" Opening AW-12-C.. 12" Chrome AW-15..... 15" O.A.L. - 1.75" Opening AW-15-C.. 15" Chrome



PN\_\_\_\_DESC\_ 8PW..... 8" 10PW..... 10" 12PW..... 12"

13

800.654.1292 • 609.387.1040 • FAX 609.386.8885 • www.cementexusa.com • info@cementexusa.com