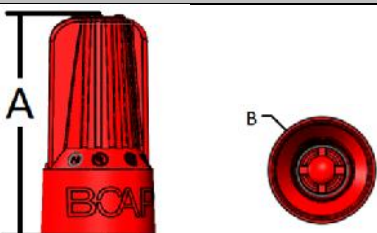


			B-CAP® WIRE CONNECTORS			MODELS B1, B2, B4																										
FEATURES/BENEFITS:																																
			- LOW PROFILE DESIGN GETS YOU INTO TIGHT SPACES AND HARD-TO-REACH SPOTS COMFORTABLY - SLIM, CLASSIC FINS OFFER A SECURE GRIP FOR EXTRA LEVERAGE AND EASY INSTALLATION - LIVE-ACTION SPRING EASILY HANDLES 2 #18 TO 5 #12, AND WILL EVEN DEAD-END A SINGLE #14 - UNIQUE, SPACE-SAVING PROFILE IS PERFECT FOR "OLD WORK" OR SHALLOW BOXES - EASILY REMOVED FOR REPEAT USAGE ON SAME SIZE OR LARGER WIRE COMBINATION																													
ELECTRICAL:																																
VOLTAGE: GENERAL: SIGN/LUMINAIRES:			600 V MAX 1000 V MAX																													
PHYSICAL:					STANDARDS & SPECIFICATIONS:																											
HOUSING: NYLON INSERT: STEEL PLATING: ZINC TEMPERATURE: 105° C (221° F)					UL 486 C UL 94V-2 FLAME RATING CSA- C22.2 NO. 188 RoHS COMPLIANT IEC 998-2-4																											
																																
WIRE RANGE & COMBINATIONS:																																
- Solid and/or stranded wire combinations unless stated otherwise - Consult website for other combinations not listed																																
MODEL B1 (YELLOW)			MODEL B2 (RED)			MODEL B4 (BLUE/GRAY)																										
STRIP LENGTH: 1/2", strip wires #16 and smaller 5/8"			STRIP LENGTH: 1/2", strip wires #16 and smaller 5/8"			STRIP LENGTH: 3/4"																										
4 to 6 #22 3 to 6 #20 2 to 6 #18 2 to 5 #16 2 to 4 #14 2 to 3 #12			5 to 6 #22 3 to 6 #20 2 to 5 #18 2 to 5 #16 2 to 5 #14 2 to 4 #12 2 #10			4 to 6 #14 2 to 5 #12 2 to 4 #10 2 #8 2 #6																										
DIMENSIONS:																																
			<table border="1"> <thead> <tr> <th rowspan="2">MODEL</th> <th colspan="2">A</th> <th colspan="2">B</th> </tr> <tr> <th>INCHES</th> <th>mm</th> <th>INCHES</th> <th>mm</th> </tr> </thead> <tbody> <tr> <td>B1</td> <td>0.96</td> <td>24.5</td> <td>0.5</td> <td>12.6</td> </tr> <tr> <td>B2</td> <td>1.22</td> <td>29.6</td> <td>0.59</td> <td>14.9</td> </tr> <tr> <td>B4</td> <td>1.51</td> <td>38.2</td> <td>0.76</td> <td>19.3</td> </tr> </tbody> </table>						MODEL	A		B		INCHES	mm	INCHES	mm	B1	0.96	24.5	0.5	12.6	B2	1.22	29.6	0.59	14.9	B4	1.51	38.2	0.76	19.3
MODEL	A		B																													
	INCHES	mm	INCHES	mm																												
B1	0.96	24.5	0.5	12.6																												
B2	1.22	29.6	0.59	14.9																												
B4	1.51	38.2	0.76	19.3																												
ORDERING INFO:																																
MODEL B1 (YELLOW)			MODEL B2 (RED)			MODEL B4 (BLUE/GRAY)																										
QUANTITY	CAT. NO.	WEIGHT (lbs)	QUANTITY	CAT. NO.	WEIGHT (lbs)	QUANTITY	CAT. NO.	WEIGHT (lbs)																								
BOX OF 100	B1-1	0.70	BOX OF 100	B2-1	0.77	BOX OF 25	B4-1	0.45																								
JAR OF 250	B1-250JR	1.00	JAR OF 350	B2-350JR	2.56	CARTON OF 250	B4-B	4.20																								
JAR OF 500	B1-500JR	1.90	JAR OF 500	B2-500JR	3.65																											
BAG OF 500	B1-B	1.70	BAG OF 500	B2-B	3.25																											
BARREL OF 25,000	B1-SK	85.00	BARREL OF 25,000	B2-SK	160.00																											
FACTORY CONTACT:					SALES CONTACT:																											
IDEAL INDUSTRIES, INC																																