


CRXRM REFRIGERANT RECYCLING MODULE



FEATURES:

- Easy access one bolt cover with 42 cubic inch solid core drier
- High efficiency coalescent oil separator to remove oil and other contaminates from refrigerant.
- Ball Valves on the hoses for easy hook up and safe disconnection.
- Built in manifold with self clearing valve. Prepares the unit for the next refrigerant.
- Manifold utilizes CPS exclusive Triple Seal piston valves.
- Suction and discharge gauges for monitoring operation
- 1/4" SAE Male flare oil drain port to remove recovered oil and contaminates.
- Light weight (15lbs) and ergonomically designed handle for portability.
- Heavy duty powder coated aluminum chassis surrounded by a tough high-density polyethylene case.
- 1/4" SAE Male flare fittings.

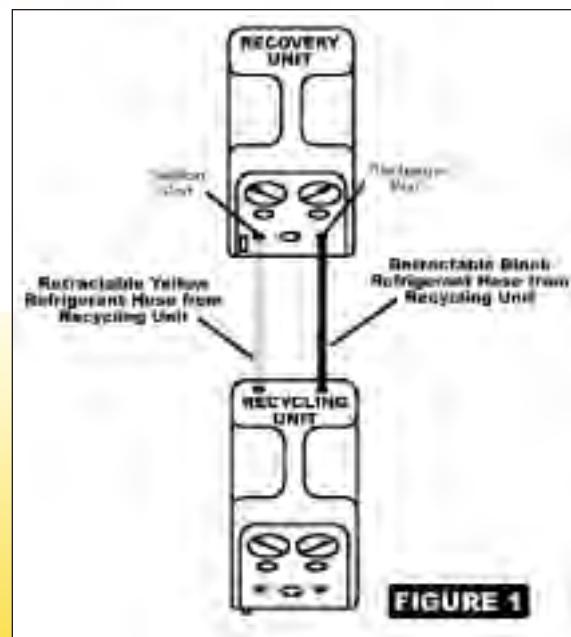

Operates with all brands of recovery machines.

CPS®