




ENERGY AND POWER QUALITY DATA LOGGER


TRUSTWORTHY POWER LOGGING

The logo for DRANXPERT features the word "DRAN" in blue and "XPERT" in black, with a blue arc above the "X". A registered trademark symbol (®) is located to the upper right of the "T".


DRAN-VIEW XP SOFTWARE

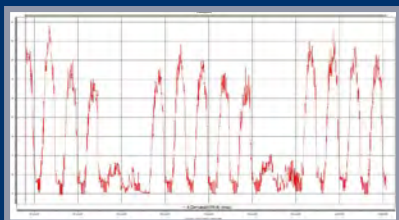


Load Trends

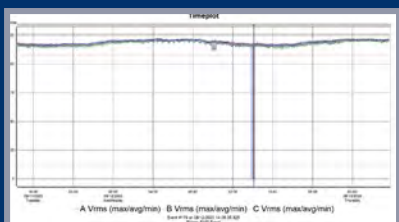

Voltage Trends

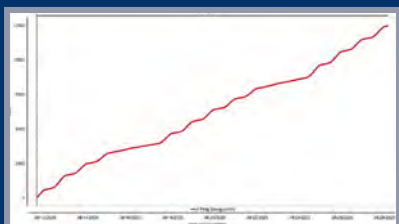

Energy Trends

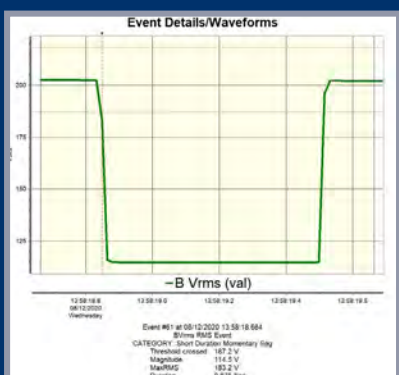

View PQ Events

DRANXPERT®

LOW COST PORTABLE ENERGY/POWER LOGGER & PQ DETECTOR

- Power/energy logger & PQ disturbance/event detector
- 3 voltage channels – Direct measurements up to 600Vrms, CATIII
- 4 current channels – Compatible with Dranetz Rogowski, hinged and 0.333mv CT's from other sources (UL listed)
- Measures: V, I, W (P), VA (S), VAR (Q), PF, Demand, Energy & much more
- PQ disturbance detector – Detect and records trends of RMS sags/dips, swells, current changes – **IEC 61000-4-30 1/2 cycle methods**
- Harmonic measurements & recording – Vthd, Ithd. Measurements using the methods of IEEE 519-2014/IEC 61000-4-7
- Web browser interface for real time meters, setup and data transfer
- Free, unlicensed Dran-View XP software for analysis & reporting
- **7 hr. battery runtime – Best in class**
- **Automatic wiring verification – LED's indicate wiring errors**
- Ethernet, USB communications
- Modbus, BACnet
- UL and CE Compliant
- 3 Year Warranty

3 VOLTAGE CHANNELS



4 CURRENT CHANNELS

COLOR CONNECTION LED'S

- Easily identify wiring errors
- Color coded to your wiring
- Correct for wiring errors



INCLUDES CT'S AND ACCESSORIES



SMALL AND COMPACT



3 VOLTAGE, 4 CURRENT CHANNELS



ETHERNET & USB

APPLICATIONS

DRANXPERT IS USER FRIENDLY IN VIRTUALLY ANY LOCAL OR REMOTE POWER MONITORING APPLICATION, INCLUDING:

• Energy audits

- Demand side management
- Basic PQ surveys

• NEC 220.87 load monitoring

- Check metering
- Sub metering
- Tenant metering
- Alternative energy production & DER integration
- Energy cost allocation
- Load profiling
- Power factor studies
- Residential applications including energy using and PQ detection
- Automatic (or manual) internet updates

INDUSTRIES INCLUDE, BUT ARE NOT LIMITED TO:

- Utility
- Commercial
- Industrial
- Manufacturing
- Electrical contractors
- Property management & real estate
- Petrochemical & Chemical
- Hospital & healthcare
- Oil exploration



TECHNICAL DATA

GENERAL

- Sampling Frequency: 32ksps (recorded and real-time meters), 128 samples per cycle (periodic waveform snapshots)
- Sag/dip, swell trigger resolution: 1 cycle (uses IEC 61000-4-30 Class S methods)
- Panel indicators: RGB LEDs for monitoring on/off, energy flow, PQ event indication, battery charging/status, wiring status
- Storage Capacity: 8GB
- UL, CE

VOLTAGE (3)

- Range: 90 to 600Vrms CATIII
- Accuracy: 90 Vrms to 600Vrms = $\pm 0.1\%$, <90 Vrms = 0.5%
- Connections: 4 safety banana voltage inputs – 3 phase voltage and 1 neutral/reference

CURRENT (4)

- Input: 0.333 VRMS full scale, Connections: BNC
- Accuracy: $\pm 0.1\%$ + probe

FREQUENCY

- Range: 50Hz = 45Hz to 55Hz, 60Hz = 55Hz to 65Hz
- Accuracy: 50/60Hz: $\pm 0.001\text{Hz}$

POWER QUALITY

- Sag/dip, swell trigger threshold resolution: 1 cycle
- Vthd: $\pm 5\%$ for $V \geq 10\% V_{nom}$
- Ithd: $\pm 5\%$ for $I \geq 10\% I_{nom}$ + probe error

ENERGY PARAMETERS (Probe Dependent)

- (True/Active) Energy (P): 0.1%
- Reactive Energy (Q): 0.1%
- Apparent Energy (S): 0.1%
- Fundamental Active Energy(P): 0.2%
- Fundamental Reactive Energy(Q): 0.2%
- Fundamental Apparent Energy (S): 0.2%
- Demand: 0.2%

POWER PARAMETERS (Probe Dependent)

- (True/Active) Power (P): 0.2%
- Reactive Power (Q): 0.2%
- Apparent Power (S): 0.2%
- Fundamental Active Power(P): 0.2%
- Fundamental Reactive Power (Q): 0.2%
- Fundamental Apparent Power (S): 0.2%
- Power Factor (PF): $\pm 0.001\%$

INSTRUMENT POWER

LINE POWER SUPPLY

- Range: 90 to 264 VAC, 47 to 63Hz, Consumption: 15W max
- Line cords/plugs: Localized – US, EU, UK, Australia available

INTERNAL BATTERY

- Rechargeable lithium Ion battery pack (UL recognized)
- Run time: 7 hours (typical), Charge time: 15 hours (typical)

COMMUNICATION INTERFACES

- Ethernet: 10
- USB: 2.0
- Protocols: Modbus, Bacnet

ENCLOSURE & MECHANICAL

MECHANICAL

- Weight: 1.4 lb. (0.64Kg)
- Dimensions: 3.5" W x 2.2" H x 7.4" L (6.4 cm x 8.9 cm x 18.8cm)
- IP50 (vertical position)

ENVIRONMENTAL

- Storage Temperature: 5 to 131 °F (-15 to +55 °C)
- Operating Temperature: 32 to 113 °F (0 to +45 °C)
- Humidity: 5% to 95% non-condensing

ORDERING INFORMATION

DRANXPERT PACKAGE ORDERING INFORMATION

Popular Rogowski Packages

DXPT-F500-16PKG-xx: 500A 16" Flex CT package
DXPT-F1500-16PKG-xx: 1500A 16" Flex CT package
DXPT-F3000-16PKG-xx: 3000A 16" Flex CT package
Also available with 24" & 36" lengths

Popular Hinged CT Packages

DXPT-H5APKG-xx: 5A CT package
DXPT-H20APKG-xx: 20A CT package
DXPT-H50APKG-xx: 50A CT package
Also available with 100A & 600A hinged CT's

xx: Enter line cord code - US, EU, UK, AU (Australia)

Each package includes: DranXperT, (3) CT's, voltage cables/clips, carry case, Dran-View XP software (download), line cord

AVAILABLE CT'S

Rogowski

FLEX-500A-16: 50-500A, 1%, 16"
FLEX-1500A-16: 150-1500, 1%, 16"
FLEX-3000A-16: 300-3000A, 1%, 16"
Also available in 24" and 36" lengths

Hinged

CT-H-5A: 5A, 0.5%, 0.4" window
CT-H-20A: 20A, 0.5%, 0.4" window
CT-H-50A: 50A, 0.5%, 0.4" window
CT-H-100A: 100A, 0.5%, 1.0" window
CT-H-600A: 600A, 0.5%, 1.38" window

