

Diameter ø50mm Shaft type Incremental Rotary Encoder

Line-up

■ Features

- 12-24VDC power supply of line driver output(Line-up)
- Suitable for measuring angle, position, revolution, speed, acceleration and distance
- Power supply : 5VDC, 12-24VDC ±5%

■ Applications

- Various tooling machinery, packing machine and general industrial machinery etc.

⚠ Please read "Caution for your safety" in operation manual before using.



■ Ordering information (Former name : ENB)

E50S	8	8000	3	N	24	
Series	Shaft diameter	Pulse/1 Revolution	Output phase	Output	Power supply	Cable
Diameter ø50mm, shaft type	ø8mm	Refer to resolution	2: A, B 3: A, B, Z 4: A, A̅, B, B̅ 6: A, A̅, B, B̅, Z, Z̅	T: Totem pole output N: NPN open collector output V: Voltage output L: Line driver output	5 :5VDC ±5% 24:12-24VDC ±5%	No mark: Cable type C: Connector cable type(※) CR: Axial connector type CS: Radial connector type

※Standard : E50S8-PULSE-3-N-24

※Cable length: 250mm

■ Specifications

Item		Diameter ø50mm shaft type of incremental rotary encoder			
Resolution(P/R) ^{※1}		•1, •2, •5, 10, 12, 15, 20, 23, 25, 30, 35, 40, 45, 50, 60, 75, 100, 120, 125, 150, 192, 200, 240, 250, 256, 300, 360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 1500, 1800, 2000, 2048, 2500, 3000, 3600, 5000, 6000, 8000			
Electrical specification	Output phase		A, B, Z phase(Line driver : A, $\bar{A}$, B, $\bar{B}$, Z, $\bar{Z}$ phase)		
	Phase difference of output		Phase difference between A and B : $\frac{T}{4} \pm \frac{T}{8}$ (T=1cycle of A phase)		
	Control output	Totem pole output	• Low - Load current:Max. 30mA, Residual voltage : Max. 0.4VDC • High - Load current: Max. 10mA, Output voltage(Power voltage 5VDC): Min. (Power voltage-2.0)VDC, Output voltage(Power voltage 12-24VDC):Min. (Power voltage-3.0)VDC		
		NPN open collector output	Load current : Max. 30mA, Residual voltage : Max. 0.4VDC		
		Voltage output	Load current : Max. 10mA, Residual voltage : Max. 0.4VDC		
		Line driver output	• Low - Load current : Max. 20mA, Residual : Max. 0.5VDC • High - Load current : Max. -20mA, Output voltage(Power voltage 5VDC) : Min. 2.5VDC, Output voltage(Power voltage 12-24VDC) : Min. (Power voltage-3.0)VDC		
	Response time (Rise/Fall)	Totem pole output	Max. 1μs	• Measuring condition - Cable length : 2m, I sink = 20mA	
		NPN open collector output			
		Voltage output			
		Line driver output			
	Max. Response frequency		300kHz		
	Power supply		• 5VDC ±5%(Ripple P-P : Max. 5%) • 12-24VDC ±5%(Ripple P-P : Max. 5%)		
	Current consumption		Max. 80mA(disconnection of the load), Line driver output : Max. 50mA(disconnection of the load)		
	Insulation resistance		Min. 100MΩ(at 500VDC megger between all terminals and case)		
Dielectric strength		750VAC 50/60Hz for 1 minute(Between all terminals and case)			
Connection		Cable type, 250mm connector cable type, Connector type(Axial, Radial)			
Mechanical specification	Starting torque		Max. 70gf·cm(0.007N·m) ^{※2} / Max. 800gf·cm(0.08N·m) ^{※3}		
	Moment of inertia		Max. 80g·cm ² (8×10 ⁻⁶ kg·m ²) ^{※2} / Max. 400g·cm ² (4×10 ⁻⁵ kg·m ²) ^{※3}		
	Shaft loading		Radial : 10kgf, Thrust : 2.5kgf		
	Max. allowable revolution ^{※4}		5000rpm		
Vibration		1.5mm amplitude or 300m/s ² at frequency of 10 to 55Hz(for 1 min.) in each of X, Y, Z directions for 2 hours			
Shock		Approx. Max. 75G			
Environment	Ambient temperature		-10 to 70°C, storage : -25 to 85°C		
	Ambient humidity		35 to 85%RH, storage : 35 to 90%RH		
Protection		Cable type, Connector cable type: IP50(IEC standard) ^{※5} , Connector type: IP65(IEC standard)			
Cable		ø5, 5-wire, Length : 2m, Shield cable(Line driver output : ø5, 8-wire) (AWG 24, Core diameter : 0.08mm, Number of cores : 40, Insulator out diameter : ø1)			
Accessory		ø8mm coupling, bracket			
Approval		Cable type CE (Except for line driver output)			
Unit weight		Approx. 275g, Connector type : 180g			

※1: "※" pulse is only for A, B phase(Line driver output is for A, A̅, B, B̅ phase). ※2: This value is for Cable type, Connector cable type(Protection: IP50).

※3: This value is for Cable type, Connector cable type(Protection: IP64)/Connector type (Protection: IP65)


※4: Make sure that max. response revolution should be lower than or equal to max. allowable revolution when selecting the resolution.

【Max. response resolution(rpm) = $\frac{\text{Max. response frequency}}{\text{Resolution}} \times 60 \text{ sec}$ 】 ※5: 'Cable type, Connector cable type is option as IP64 protection.

※Environment resistance is rated at no freezing or condensation.

Incremental ø50mm Shaft type


■ Control output diagram

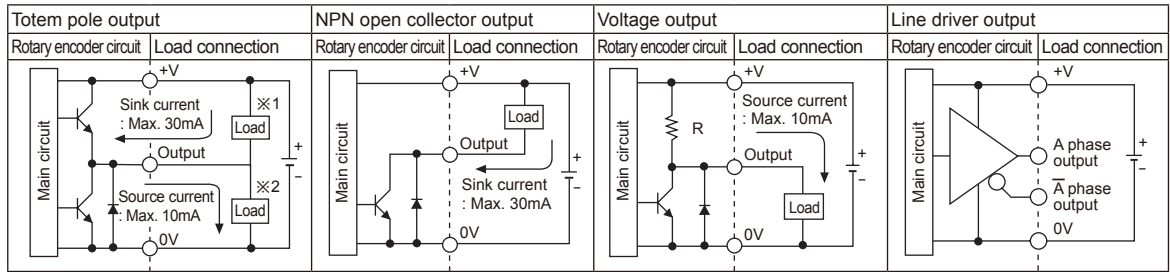


- Totem pole output type can be used for NPN open collector output type(※1) or Voltage output type(※2).
- The output circuit of A, B, Z phase are the same. (Line driver output is A, $\bar{A}$, B, $\bar{B}$, Z, $\bar{Z}$)

■ Output waveform

- Totem pole output / NPN open collector output / Voltage output

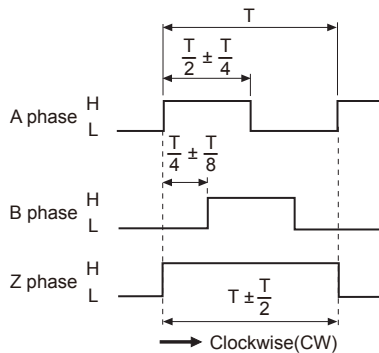

- Line driver output

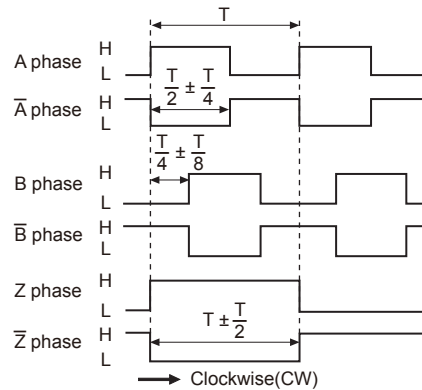


※CW : Right turn as from the shaft


■ Connections

◎ Cable type

- Totem pole output / NPN open collector output / Voltage output

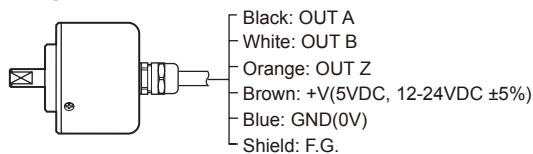

- Line driver output

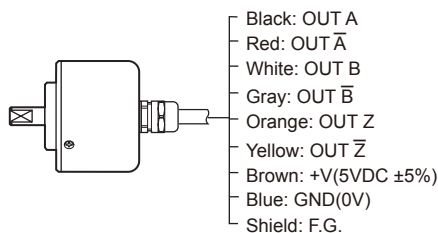


※Unused wires must be insulated.

※The shield cable and metal case of encoder must be grounded(F.G.)

◎ Cable connector type / Connector type

- Totem pole output / NPN open collector output / Voltage output
- Line driver output



Totem pole output/ NPN open collector output/ Voltage output			Line driver output		
Pin No	Function	Cable color	Pin No	Function	Cable color
①	OUT A	Black	①	OUT A	Black
②	OUT B	White	②	OUT A-bar	Red
③	OUT Z	Orange	③	+V	Brown
④	+V	Brown	④	GND	Blue
⑤	GND	Blue	⑤	OUT B	White
⑥	F.G.	Shield	⑥	OUT Z	Orange
—			⑦	OUT B-bar	Gray
			⑧	OUT Z-bar	Yellow
			⑨	F.G.	Shield

※F.G.(Field Ground) : It must be grounded separately.

(A)
Photo
electric
sensor

(B)
Fiber
optic
sensor

(C)
Door/Area
sensor

(D)
Proximity
sensor

(E)
Pressure
sensor

(F)
Rotary
encoder

(G)
Connector/
Socket

(H)
Temp.
controller

(I)
SSR/
Power
controller

(J)
Counter

(K)
Timer

(L)
Panel
meter

(M)
Tacho/
Speed/
Pulse
meter

(N)
Display
unit

(O)
Sensor
controller

(P)
Switching
mode power
supply

(Q)
Stepper
motor&
Driver&Controller

(R)
Graphic/
Logic
panel

(S)
Field
network
device

(T)
Software


(U)
Other

E50S Series


■ Dimensions

(unit: mm)

© Cable type, Connector cable type(Protection : IP50)

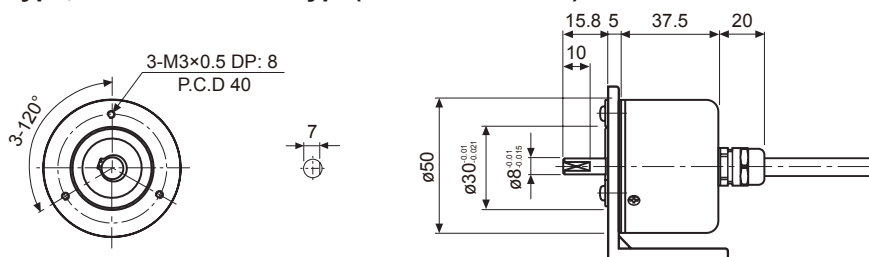


© Cable type, Connector cable type(Protection : IP64)

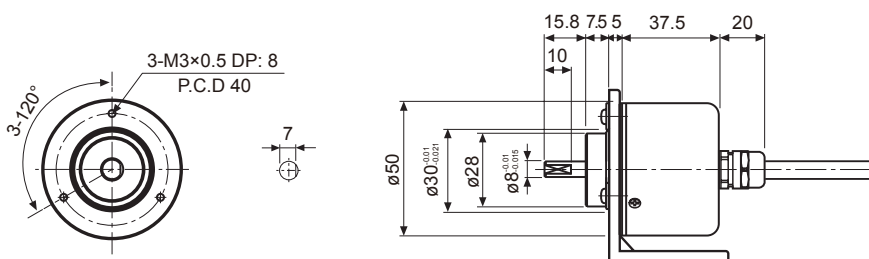


Cable for Cable type	Cable for Connector cable type
ø5, 5-wire(Line driver output: 8-wire), Length: 2000mm. Shield cable	ø5, 5-wire(Line driver output: 8-wire), Length: 250mm. Shield cable

※Connector cable is sold separately and refer to the G-10 for specifications.


© Axial / Radial connector type(Protection: IP65)

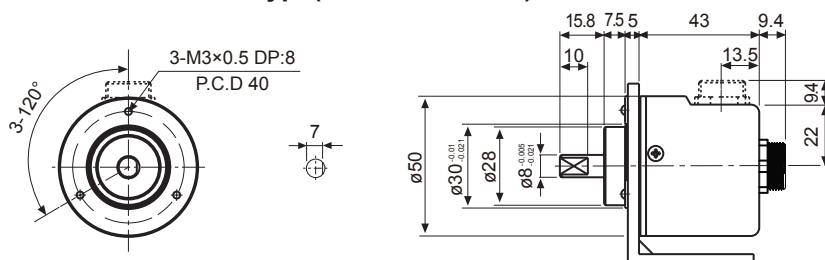

- **Bracket**

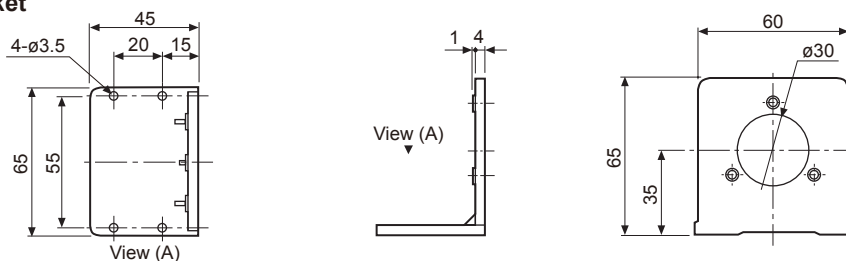

- **Coupling(E50S)**

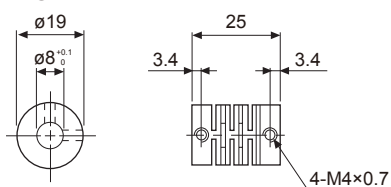

- Parallel misalignment: Max. 0.25mm
- Angular misalignment: Max. 5°
- End-play: Max. 0.2mm

※For parallel misalignment, angular misalignment, end-play terms, refer to the F-78 page.

※For flexible coupling(ERB Series) information, refer to the F-71 page.