



CARD TYPE DIGITAL MULTIMETER KEW 1019R




KEW 1019R Specifications

- ILLW TOTOTT OPEN	Jiii Gallono	
DC V	600.0mV/6.000/60.00/600.0V (Input impedance: approx. 10MΩ)	
	±0.8%rdg±5dgt (600.0mV/6.000/60.00V)	
	±1.0%rdg±5dgt (600.0V)	
AC V	6.000/60.00/600.0V (Input impedance: approx. 10MΩ)	
(RMS)	±1.3%rdg±5dgt (6.000/60.00V) (50/60Hz)	
	±1.7%rdg±5dgt (6.000/60.00V) (45 - 500Hz)	
	±1.6%rdg±5dgt (600.0V) (50/60Hz)	
	±2.0%rdg±5dgt (600.0V) (45 - 500Hz)	
Ω	600.0Ω/6.000/60.00/600.0kΩ/6.000/40.00MΩ	
	±1.0%rdg±5dgt (600.0Ω/6.000/60.00/600.0kΩ/6.000MΩ)	
	±2.5%rdg±5dgt (40.00MΩ)	
Continuity buzzer	600.0Ω (Buzzer threshold value 60Ω or less)	
Capacitance	6.000/60.00/600.0nF/6.000/60.00/600.0µF	
	±3.5%rdg±50dgt (6.000nF)	
	±3.5%rdg±10dgt (60.00nF)	
	±3.5%rdg±5dgt (600.0nF/6.000/60.00μF)	
	±4.5%rdg±5dgt (600.0μF)	
Applicable standards	IEC 61010-1 CAT III 300V, CAT II 600V Pollution degree 2	
	IEC 61010-2-033, IEC 61010-031, IEC 61326-2-2	
Power source	CR2032(3V)x1	
Continuous measuring time	Approx.120 hours	
	Auto sleep: approx.15 minutes	
Dimensions/Weight	126(L)x85(W)x18(D)mm / Approx.135g (including hard case, battery)	
Accessories	9188 (Hard case), CR2032x1, Instruction manual	

True RMS function for accurate readings also in presence of modern loads such as LED lamps, motor inverters, PCs, TVs, Air conditioners, etc.			
Waveform	True RMS type	Averaging value type	
	✓ correct reading	✓ correct reading	
-111-	✓ correct reading	higher reading	
$\overline{}$	✓ correct reading	lower reading	
M	✓ correct reading	lower reading	

Included Accessory



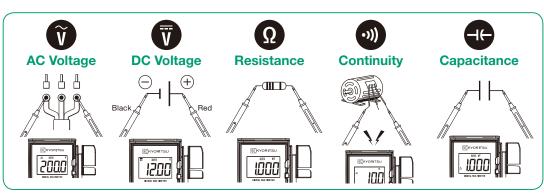





Please read the "Safety Warnings" in the instruction manual supplied with the instrument thoroughly and completely Safety Warnings: If the instruction maintains supplied with the instruction maintains supplied with the instruction maintains supplied with the instruction maintains and completely safety Warnings: If the instruction maintains supplied with the instruction maintains and instruc to operate the instrument on a correct power supply and voltage rating marked on each instrument.

For inquires or orders:

^{*}AC V: CF \leq 3(50/60Hz) For non-sinusoidal waveforms, add \pm 0.5%rdg \pm 5dgt, 900Vpeak