

LD SERIES


Plastic Leak Detection Sensor



- Floor Design
- Capacitive Fail-Safe Operation
- Perfect for Aggressive and Electrically Conductive Corrosive Chemicals



SERIES : LD

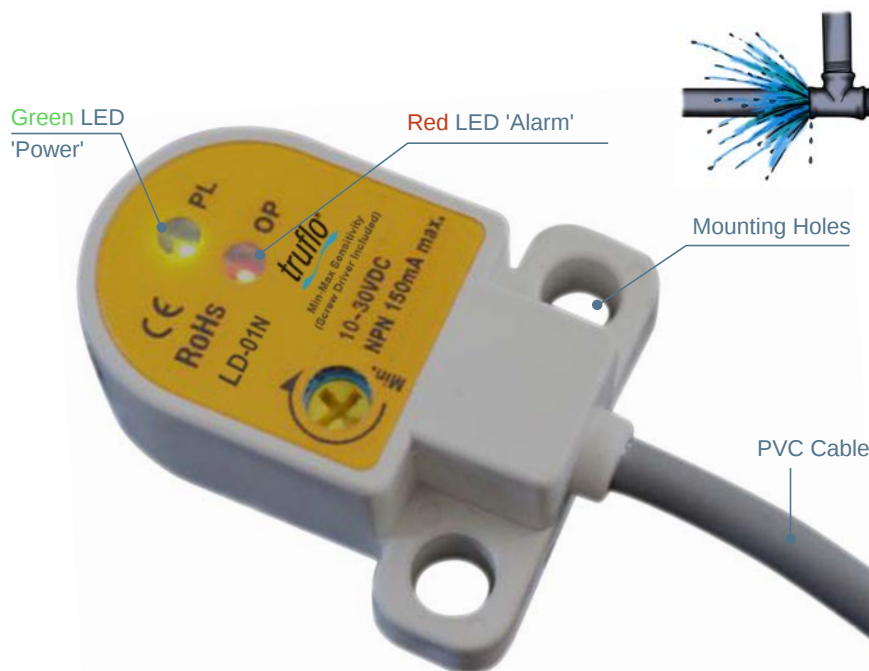

Corrosion Resistant

TECHNICAL FEATURES

SPECIFICATION	DESCRIPTION
Power Consumption	Approx 3W
Ambient Temperature	-20 - 60°C / -20 - 140°F
Outputs	• Switch : NPN / PNP maximum 150mA • Switch [+AO / -AO]

CODE NUMBERS AND REFERENCES

Code	Description
LD-01N	Compact Leak Detector with 2m of Cable

APPLICATIONS



- ▶ Containment Dikes
- ▶ Double Wall Tanks
- ▶ Leakage Basins / Containers
- ▶ Computer Rooms
- ▶ Leaking Pumps

PRINCIPLE

The LD Series is designed to detect conductive liquids providing a SSR relay Pulse Alarm.

- ▶ NPN or PNP Pulse Relay Output

Electrical Connections

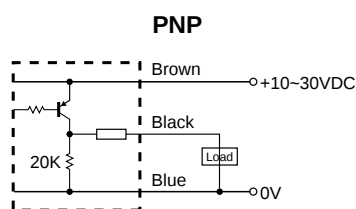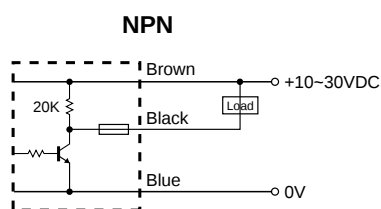

Dimensions

