



LP 50 SERIES

Pressure Transmitter

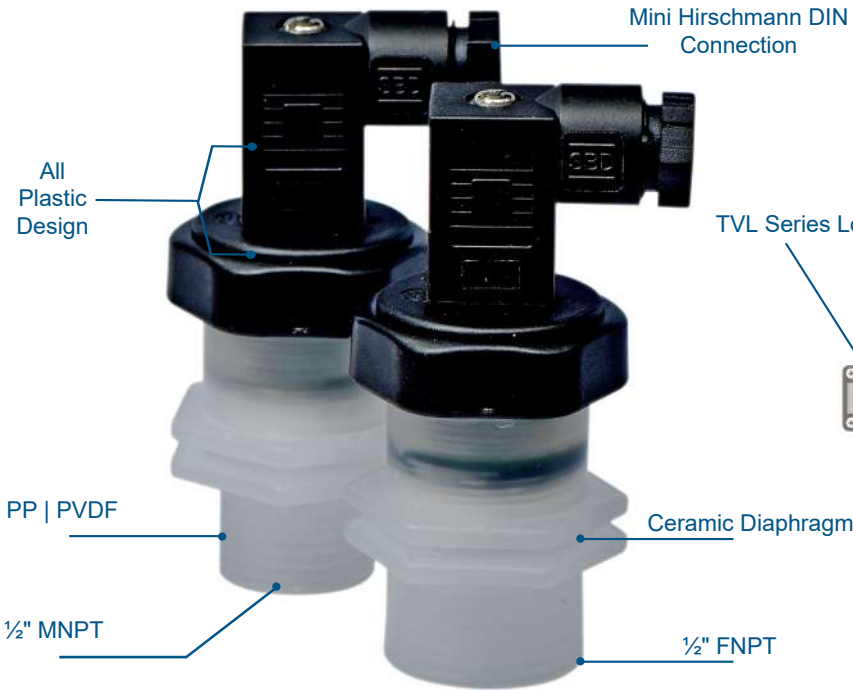

TVL Series Local Display

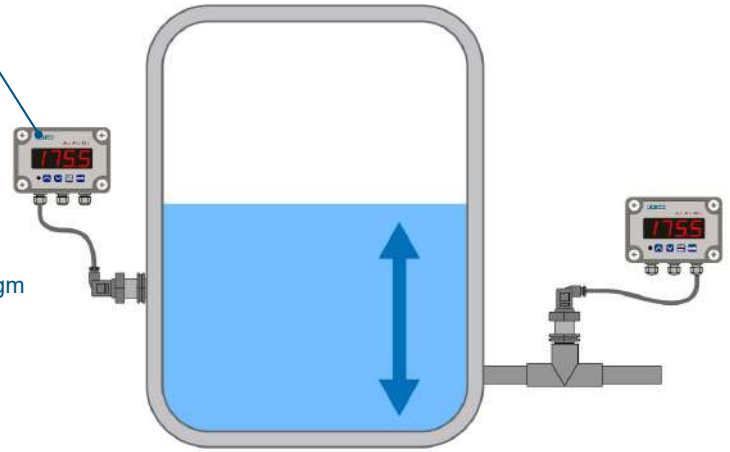

FEATURES

- PP | PVDF Materials
- 4-20mA Analog Output
- FNPT | MNPT Connections Ceramic
- Sensing Diaphragm
- Easy Installation
- 0.25% F.S | High Accuracy
- No Programming Required
- Temperature Compensated
- Excellent Chemical Resistance

APPLICATIONS


- Chemicals | Acids | Bases
- Tank Level
- Filter | Strainer Notification

SPECIFICATIONS

Range*	0-60psi 0-100psi 0-160psi
Medium	H2O Corrosive Liquid Gases
Accuracy	0.5% F.S
Power Supply	18 - 36VDC
Output Signal	4-20mA 2 Wire Loop Powered
Medium Temperature	-35 - +85°C
Environment Temperature	-40 - +80°C
Store Temperature	-40 - +80°C
Temperature Effect	±0.02% FS
Pressure Connection	1/2" MNPT FNPT
Electrical Connection	Hirschmann DIN Quick Connect

* Consult Factory for Other Ranges

DIMENSIONS

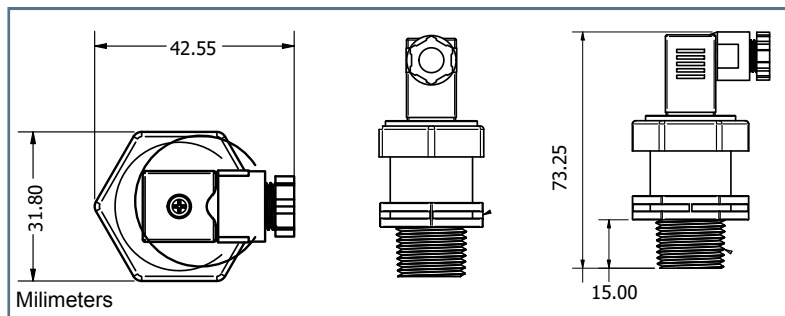

ORDERING

Size	Part Number	Material
1/2"	LP50-PP	PP
1/2"	LP50-PVDF	PVDF

Add Suffix-
'M' - MNPT

1.888.610.7664



www.calcert.com

sales@calcert.com