

UPLOAD DATA VIA WIFI WITHOUT COMPUTER



LTI-WIFI

Desktop WiFi Interface Cradle

***LogTag Recorders***

1.888.610.7664

 www.calcert.com

sales@calcert.com



The LogTag LTI-WiFi wireless interface is a high-speed 802.11/b/g/n compatible device that connects to your WiFi network.

The LogTag® LTI-WiFi interface cradle allows download of standard LogTag loggers with 3 silver contact pins and uploads data to LogTag Online, LogTag's secure cloud server.

\*TRED30-16R and external probe in the image sold separately

## Features



Connects to LogTag Online, a cloud server solution for viewing, analyzing and storing data.



Easily set up to work with your WiFi network.



Buffers up to 48 full memory logger downloads during loss of network connectivity.



Uploaded data is immediately available for viewing in LogTag Online.



Downloaded data is fully encrypted and automatically uploaded to a secure LogTag cloud server.



Inbuilt LED indicators show data download and network access status.

# Applications



*Healthcare*



*Clinic*




*Transportation*



*Industrial*



*Chemicals*

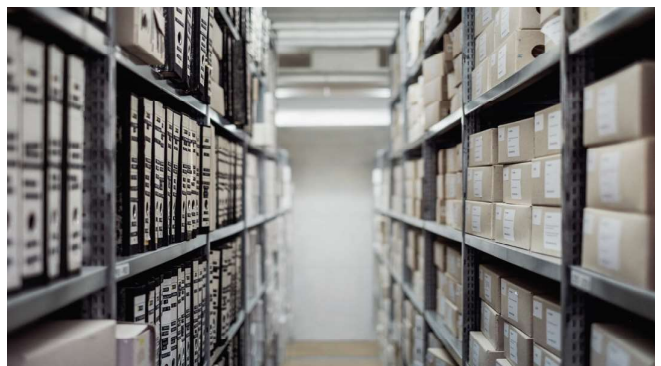

*Indoor Spaces*

# Specifications

<b>Product Model</b>	LTI-WIFI
<b>Operating Temperature Range</b>	0°C to +40°C
<b>Storage Temperature Range</b>	-40°C to +70°C
<b>USB Standard</b>	2.0
<b>Logger buffer</b>	Up to 48 logger downloads can be buffered
<b>Wireless Standard</b>	2.4GHz 802.11 b/g/n. High sensitivity internal antenna
<b>Network Security</b>	WPA/WPA2-PSK
<b>Environmental</b>	IP50 (Rated for indoor use only)
<b>Software Compatibility</b>	LTA 2.9r2, LTA 3.0r8, LTX 1.1r1 LogTag Online
<b>Indicators</b>	Green 'Activity' LED. Red 'Busy/Error' LED. Blue/Red dual colour 'Network Activity' LED
<b>Power Source</b>	5V/5W (Computer, power bank or USB wall charger)
<b>Size</b>	45mm(h) x 85mm(W) x 71mm(D), excluding cable
<b>Weight</b>	74g, excluding cable
<b>Case Material</b>	Polycarbonate, ABS
<b>Connection</b>	USB Micro
<b>Range (Clear Line of Sight)</b>	40m
<b>Accessories</b>	2.0m USB Cable

