

MATERIAL

- Drywall
- Wood
- Plaster
- Brick
- Tiles
- Resilient flooring
- Laminates
- Roofing



MEP-EU 05/14 REV.1.1



Product order code: MEP

FEATURES

- Wide range of readings from 5% to 30% on Wood Scale and 0 to 100 on comparative scale for all other materials.
- Deep signal penetration, up to 30mm (1¼") in wood and drywall, detects elevated moisture through most covering materials without having to damage or puncture the materials being tested.
- Three ranges of sensitivity: Wood & Timber / Drywall & Roofing / Plaster & Brick – making it ideal for testing most materials found in the building envelope.
- Detects moisture through paint, wall paper, drywall, ceramic tiles, floor coverings, wood, ceiling tiles, roofing membranes and asphalt composition shingles.
- High Moisture Audio Warning Tone which can be enabled or disabled.
- Large clear easy to read analogue display giving meaningful readings.
- Hold Function which enables the user to "freeze" the reading, useful when taking readings where the meter face may not be visible.



PRODUCT DESIGN


The MEP Moisture Encounter Plus detects and evaluates moisture conditions within various building materials by non-destructively measuring the electrical impedance. A low frequency electronic signal is transmitted into the material via the electrodes in the base of the instrument. The strength of this signal varies in proportion to the amount of moisture in the material under test. The MEP determines the strength of the current and converts this to a moisture content value, displaying it on a large clear analogue dial.

USES

Used and trusted by generations of professionals worldwide for the purpose of:

- Locating moisture related problems within and behind a variety of building materials in the building envelope.
- Mapping the extent of moisture damage caused to buildings.
- Monitoring progressive drying conditions in the drying

HOW IT WORKS

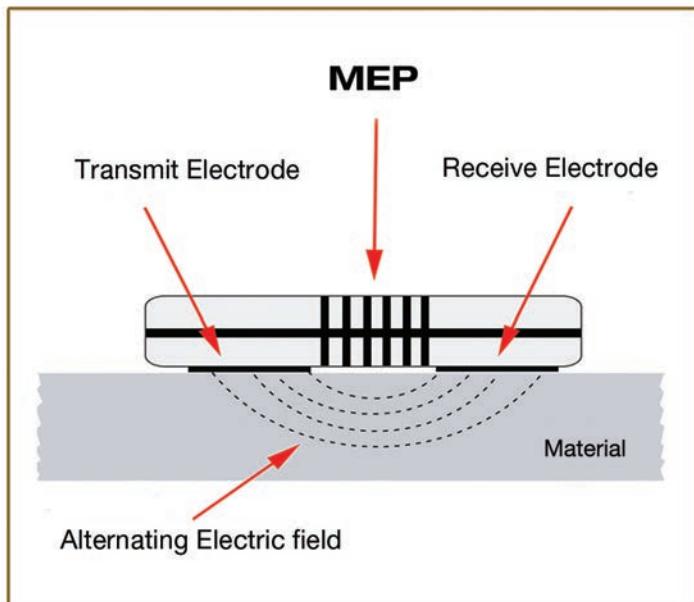

SPECIFICATIONS

Size:	150mm x 85mm x 38mm (6" x 3.5" x 1.5")
Weight:	220g (7.7oz)
Construction:	ABS Body
Power:	9 volt PP3 Battery (included)
Display:	Analogue
Depth of penetration:	up to 30mm (1¼")

MEASURING RANGE

Wood Moisture Content:	5 to 30 %
Reference scale for building materials:	0 to 100

