



The MR06-200 wire crimp pull sensor is a hand-operated solution for measuring wire crimp pull-off forces. The ergonomic handles and convenient tensioning mechanism make field measurements a breeze for applications up to 200 lbF (1,000 N). Squeeze the handles together to increase tension on the sample until a break occurs. The peak force is recorded by the indicator.

A rotating turret with slots of multiple sizes accommodates a wide range of wire diameters, up to 0.25 in. (6.4 mm).



^ Unique Plug & Test™ technology allows for interchangeable sensors to be used with a Mark-10 indicator. All calibration and configuration data is saved in the smart connector.




^ The Plug & Test™ connector locks into the receptacle in the indicator when fully inserted. Dual buttons on the indicator housing release the connector for easy removal. Gold plated spring contacts ensure long lasting and reliable connection.

## Specifications

|                                       |                                                                                                                                                                                          |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Accuracy:</b>                      | ± 0.5% of full scale + indicator                                                                                                                                                         |
| <b>Safe Overload:</b>                 | 150% of full scale                                                                                                                                                                       |
| <b>Weight:</b>                        | 2.5 lb [1.2 kg]                                                                                                                                                                          |
| <b>Slot Dimensions<br/>(in [mm]):</b> | 0.03 [0.8], 0.05 [1.3], 0.06 [1.5], 0.08 [2.0], 0.09 [2.3],<br>0.11 [2.8], 0.13 [3.3], 0.14 [3.6], 0.16 [4.1], 0.17 [4.3],<br>0.19 [4.8], 0.20 [5.1], 0.22 [5.6], 0.24 [6.1], 0.25 [6.4] |

### Dimensions in [mm]

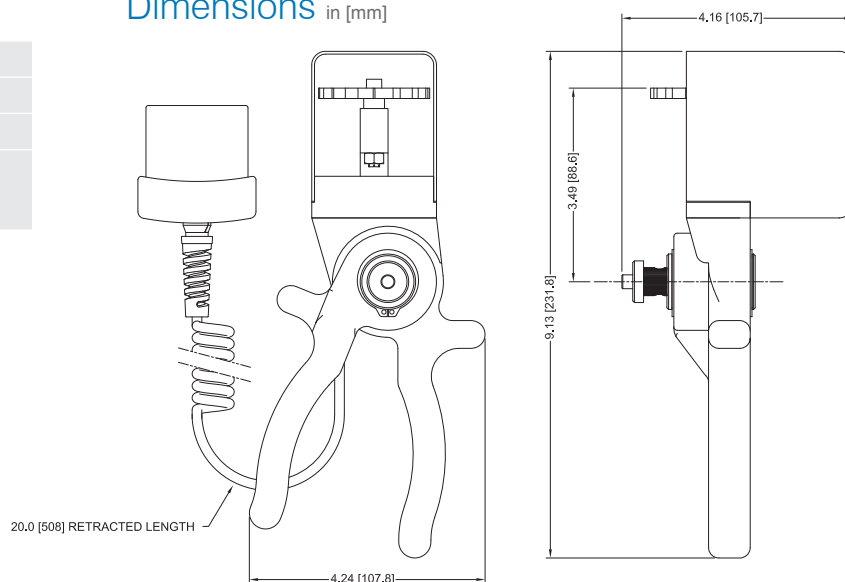

## Capacity x Resolution

| Model No. | With Models 7i & 5i indicators |          |            |            |            | With Model 3i indicator |           |          |
|-----------|--------------------------------|----------|------------|------------|------------|-------------------------|-----------|----------|
|           | lbF                            | ozF      | kgF        | N          | kN         | lbF                     | kgF       | N        |
| MR06-200  | 200 x 0.1                      | 3200 x 2 | 100 x 0.05 | 1000 x 0.5 | 1 x 0.0005 | 200 x 0.2               | 100 x 0.1 | 1000 x 1 |