

VA/VF/VS-7000/9000 Series

Linked Globe Valve Assemblies with Linear SmartX Actuators

Globe Valve Assemblies

The Schneider Electric VA, VF, and VS-7000 and -9000 series Linked Globe Valve Assemblies with Schneider Electric SmartX Linear Series Actuators are complete actuator/valve assemblies that accept two position, floating, or proportional control, respectively, from a DDC system or from a thermostat, for control of hot water, chilled water, and steam.


These valve assemblies consist of Linear Series spring return Schneider Electric SmartX Actuators directly mounted on 1/2" up to 4" (15 mm to 80 mm) 2-way and 3-way globe valve bodies. 3-way assemblies are available for mixing (1/2" to 4") and diverting (1/2" to 2") applications. The Linear Series Schneider Electric SmartX Actuators feature linear travel and an integral linkage, eliminating the need for separate linkages.

Typical applications include reheat on VAV boxes, fan coil units, hot and chilled water coils in air handling units, unit ventilators, and central system applications.


Globe Valve Assembly Selection Procedure

When selecting a globe valve assembly, you must determine the applicable codes for the control signal type, valve body configuration, end connection, port size, and actuator. Select a globe valve assembly part number as follows:


- Control Signal Type, Valve Body Configuration, and End Connection
 - Referring to "Part Numbering System", select the appropriate codes for these part number fields.
- Valve Size (Flow Coefficient)
 - If the required flow coefficient (C_v) has not yet been determined, do so as follows:
 - Refer to the "Sizing and Selection" to calculate the required C_v .
 - Select the nearest available C_v and corresponding valve body port code from "Part Numbering System".
- Actuator
 - Select the appropriate actuator and code, according to "Part Numbering System" based on the control signal type, required valve normal position, and voltage requirements. For detailed actuator information, refer to the applicable actuator specifications.
- Close-off Pressure
 - Confirm in Table-3 or Table-4 that the selected actuator and valve body combination provides sufficient close-off pressure. If no close-off pressure is shown, the valve body/actuator combination is not valid.
- Available Space
 - If available space is a consideration, check the appropriate dimensional figure (Figure 8 through Figure 19) and its accompanying table for any potential fit problems.



2-Way Linked Globe Valve Assembly (shown assembly uses SmartX Mx51-710x actuator)



3-Way Linked Globe Valve Assembly (shown assembly uses SmartX Mx51-720x actuator)




3-Way Linked Flanged Globe Valve Assembly (shown assembly uses SmartX Mx61-720x actuator)

Note: Globe Valve Assemblies are not available with Mx51-7103-0x0 actuators (equipped with appliance wire). However, if required, you may field-assemble one of these actuators to a globe valve body.

Life Is On

Schneider
Electric

Linked Globe Valve Assembly Part Numbering System

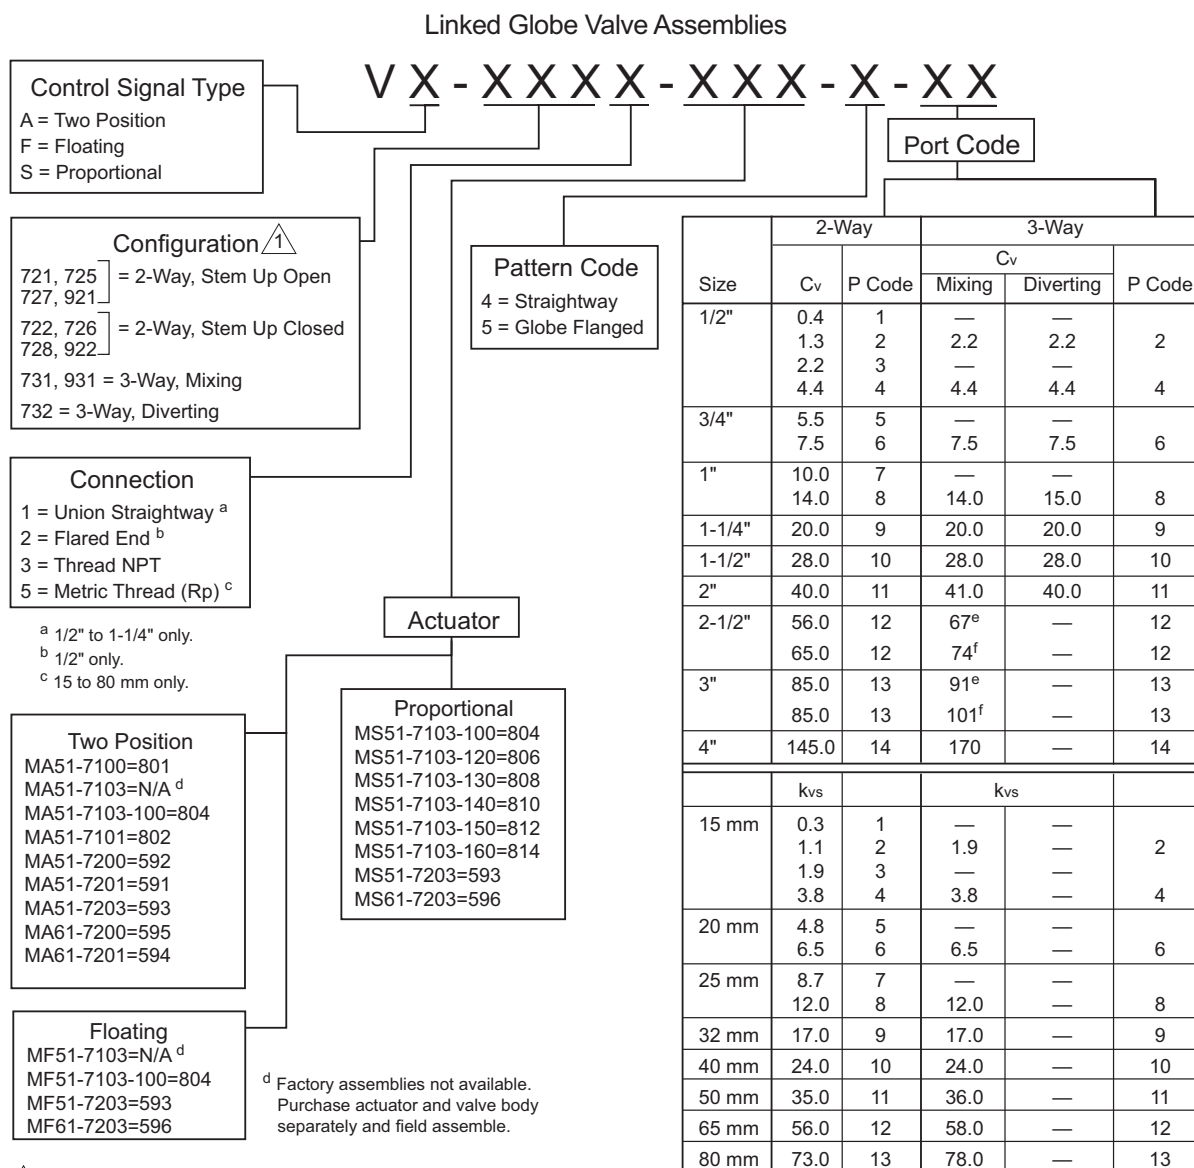

¹ The configuration of the valve assembly determines the valve stem position and flow, as shipped from the factory. See the table below.

^e Threaded valve body.

^f Flanged valve body.





| Valve Assemblies | Valve Body Action | Factory Shipped Position | | Action |
|--|----------------------|--------------------------|---------|--|
| | | Valve Stem | Flow | |
| VX-721X-XXX-4-P VX-725X-XXX-4-P VX-727X-XXX-4-P VX-921X-XXX-X-P | 2-Way Stem Up Open | Up | Open | A to AB Flow decreases as actuator extends |
| VX-722X-XXX-4-P VX-726X-XXX-4-P VX-728X-XXX-4-P VX-922X-XXX-X-P | 2-Way Stem Up Closed | Up | Closed | A to AB Flow increases as actuator extends |
| VX-731X-XXX-4-P VX-931X-XXX-X-P | 3-Way Mixing | Up | B to AB | A to AB Flow increases as actuator extends B to AB Flow decreases as actuator extends |
| VX-732X-XXX-4-P | 3-Way Diverting | Up | B to AB | B to A Flow increases as actuator extends |

Valve/Actuator Combinations

2-Way Linked Globe Valve Assemblies with Linear Series Actuators

Note: Choose a valve assembly having a close-off pressure capability sufficient for the application. Not all valve body and actuator combinations are available factory-assembled. Some combinations must be field-assembled.

Table 3 2-Way Linked Globe Valve Assemblies with Linear Series Spring Return Actuators — Selection Chart.
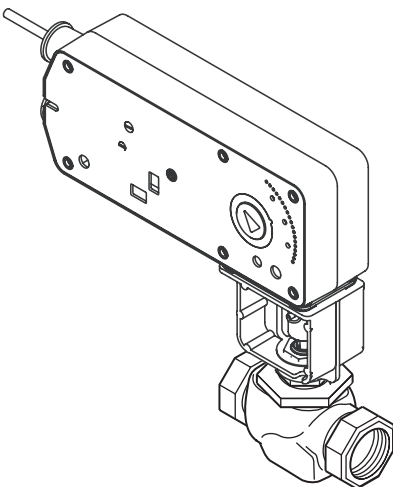
|  2-Way Linked Globe Valve Assemblies | | | | |  | |  | |  | |
|---|--|------------------------|-----------------------------|------------------------------|---|-------------------|---|--|---|--|
| | | | | | Actuator Force Rating | | | | | |
| | | | | | 105 lbf (467 N) | | | 220 lbf (979 N) | | |
| | | | | | Actuator Model (Actuator Code) | | | | | |
| | | | | | Two-Position MA51-7100 (801) MA51-7101 MA51-7103-100 (804) Floating MF51-7103-100 (804) Proportional MS51-7103-100 (804) MS51-7103-130 MS51-7103-140 MS51-7103-150 (812) MS51-7103-160 (814) | | | Two-Position MA51-7200 MA51-7203 (593) Floating MF51-7203 (593) Proportional MS51-7203 (593) MS51-7203-040 MS51-7203-050 | | Two-Position MA61-7200 MA61-7203 (596) Floating MF61-7203 (596) Proportional MS61-7203 (596) MS61-7203-040 MS61-7203-050 |
| Valve Assembly Part Number ^b | P Code | Valve Size in. (mm) | C _v ^c | k _{vs} ^c | Actuator Close-off Pressure psi ^{de} | | | | | |
| | | | | | N.O. ^f | N.C. ^g | | | | |
| Vx-72x1-xxx-4-P Vx-72x2-xxx-4-P Vx-72x3-xxx-4-P Vx-72x5-xxx-4-P ^h | 1 | 1/2 (15) | 0.4 | 0.3 | 250 | 250 | — | — | | |
| | 2 | | 1.3 | 1.1 | | | | | | |
| | 3 | | 2.2 | 1.9 | | | | | | |
| | 4 | | 4.4 | 3.8 | | | | | | |
| | 5 | 3/4 (20) | 5.5 | 4.8 | 200 | 200 | — | — | | |
| | 6 | | 7.5 | 6.5 | | | | | | |
| | 7 | 1 (25) | 10.0 | 8.7 | 150 | 90 | — | — | | |
| | 8 | | 14.0 | 12 | | | | | | |
| | 9 | 1¼ (32) | 20.0 | 17 | 90 | 60 | 150 | — | | |
| Vx-72x3-xxx-4-P Vx-72x5-xxx-4-P ^h | 10 | 1½ (40) | 28.0 | 24 | 60 | 35 | 100 | — | | |
| | 11 | 2 (50) | 40.0 | 35 | 32 | 20 | 65 | | | |
| Vx-92x3-xxx-4-P ⁱ Vx-92x3-xxx-5-P ⁱ Vx-92x5-xxx-4-P ^h | 12 | 2½ (65) | 56.0 ⁱ | 48 ⁱ | — | — | — | 33 | | |
| | | | 65.0 ⁱ | 56 ⁱ | | | | 22 | | |
| | Vx-9213-xxx-5-P ⁱ Vx-9223-xxx-5-P ⁱ | 13 | 3 (80) | 85.0 | 73 | — | — | — | — | |
| Vx-9213-xxx-5-P ⁱ Vx-9223-xxx-5-P ⁱ | 14 | 4 (N/A) | 145.0 | 125 | — | — | — | 12 | | |

b - To determine a specific part number, see "Part Numbering System".

c - $C_v = \frac{\text{GPM}}{\sqrt{\Delta P}}$ Where ΔP is measured in psi $k_{vs} = \frac{C_v}{1.156}$ $k_{vs} = \frac{\text{m}^3/\text{h}}{\sqrt{\Delta P}}$ Where ΔP is measured in bar = 100 kPa

d - Close-off ANSI IV (.01%) for soft seats. For seat leakage ratings of specific valve bodies, see Table 5 and Table 6.

e - Close-off pressure ratings describe only the differential pressure which the actuator can close-off with adequate seating force. Consult valve body specifications for other limitations. The rating value is the pressure difference between the inlet and outlet ports.

f - Normally open (N.O.) assembly using stem up open valve body. See "Part Numbering System".

g - Normally closed (N.C.) assembly using stem up closed valve body. See "Part Numbering System".

h - Metric thread 15 to 80 mm (Rp 1/2 to Rp 3).





i - Threaded valve body.

j - Flanged valve body.

3-Way Linked Globe Valve Assemblies with Linear Series Actuators

Note: Choose a valve assembly having a close-off pressure capability sufficient for the application. Not all valve body and actuator combinations are available factory-assembled. Some combinations must be field-assembled.

Table 4 3-Way Linked Globe Valve Assemblies with Linear Series Spring Return Actuators — Selection Chart.
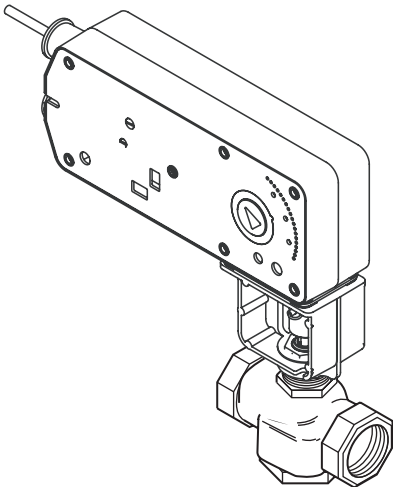
|  <p>3-Way Linked Globe Valve Assemblies</p> | | | | |  |  |  |
|---|--------|---------------------|--------------------|------------------|--|--|---|
| | | | | | Actuator Force Rating | | |
| | | | | | 105 lbf (467 N) | | 220 lbf (979 N) |
| | | | | | Actuator Model (Actuator Code) | | |
| | | | | | Two-Position MA51-7100 MA51-7101 Floating MF51-7103-100 (804) Proportional MS51-7103-100 (804) MS51-7103-130 MS51-7103-140 MS51-7103-150 (812) MS51-7103-160 (814) | | Two-Position MA51-7200 MA51-7201 MA51-7203 (593) Floating MF51-7203 Proportional MS51-7203 (593) MS51-7203-040 MS51-7203-050 |
| Valve Assembly Part Number ^b | P Code | Valve Size in. (mm) | Cv ^c | kvs ^c | Actuator Close-off Pressure psi ^{d,e} | | |
| Mixing Vx-7313-xxx-4-P Vx-7315-xxx-4-P | 2 | 1/2 (15) | 2.2 | 1.9 | 250 | — | — |
| | 4 | | 4.4 | 3.8 | | | |
| | 6 | 3/4 (20) | 7.5 | 6.5 | 200 | | |
| | 8 | 1 (25) | 14.0 | 12.0 | 90 | | |
| | 9 | 1¼ (32) | 20.0 | 17 | 60 | | |
| | 10 | 1½ (40) | 28 | 24 | 35 | | |
| | 11 | 2 (50) | 41 | 36 | 20 | | |
| Diverting Vx-7323-xxx-4-P | 4 | 1/2 (15) | 4.4 | 3.8 | 250 | — | — |
| | 6 | 3/4 (20) | 7.5 | 6.5 | | | |
| | 8 | 1 (25) | 15.0 | 13.0 | | | |
| | 9 | 1¼ (32) | 20.0 | 17.3 | | | |
| | 10 | 1½ (40) | 28 | 24.2 | | | |
| | 11 | 2 (50) | 40 | 34.6 | | | |
| Vx-9313-xxx-4-P ^g Vx-9313-xxx-5-P ^h Vx-9315-xxx-4-P ⁱ | 12 | 2½ (65) | 67.0 ^g | 58 ^g | — | — | 33 |
| | | | 74.0 ^h | 64 ^h | | | |
| | 13 | 3 (80) | 91.0 ^g | 79 ^g | | | 22 |
| | | | 101.0 ^h | 87 ^h | | | |
| Vx-9313-xxx-5-P ^h | 14 | 4 (N/A) | 145.0 | 125 | — | — | 12 |

b - To determine a specific part number, see "Part Numbering System".

$$C_v = \frac{\text{GPM}}{\sqrt{\Delta P}} \quad \text{Where } \Delta P \text{ is measured in psi} \quad k_{vs} = \frac{C_v}{1.156} \quad k_{vs} = \frac{\text{m}^3/\text{h}}{\sqrt{\Delta P}} \quad \text{Where } \Delta P \text{ is measured in bar} = 100 \text{ kPa}$$

d - Close-off ANSI IV (.01%) for soft seats. For seat leakage ratings of specific valve bodies, see Table 5 and Table 6.

e - Close-off pressure ratings describe only the differential pressure which the actuator can close-off with adequate seating force. Consult valve body specifications for other limitations. The rating value is the pressure difference between the inlet and outlet ports.

f - Normally open (N.O.) assembly using stem up open valve body. See "Part Numbering System".

g - Normally closed (N.C.) assembly using stem up closed valve body. See "Part Numbering System".



h - Metric thread 15 to 80 mm (Rp 1/2 to Rp 3).

i - Threaded valve body.

j - Flanged valve body.

Globe Valve Body Specifications

Table 5 Specifications for 1/2" to 2" VB-7xxx Series and 2½" and 3" VB-9xxx Series Globe Valve Bodies.
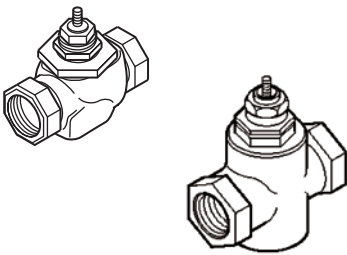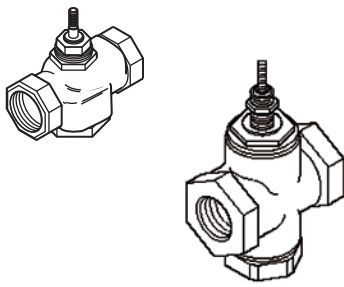
| Specifications NPT, Rp Screwed Valve Bodies | | 2-Way | 3-Way |
|--|---------|---|---|
| | |  |  |
| Applications | | Chilled or Hot Water, or Steam | Chilled or Hot Water |
| Type of End Fitting | | NPT, Rp Screwed, Flared, Union Straightway | NPT, Rp Screwed, Flared |
| Size | | VB-7xxx Series 1/2" through 2" (15 mm through 50 mm) VB-9xxx Series 2½" and 3" (65 mm and 80 mm) | |
| Action | | Stem Up Open or Stem Up Closed | Mixing or Diverting |
| Valve Body Series ^a | | Vx-72xx-0-4-P Vx-92xx-0-4-P | Vx-73xx-0-4-P Vx-93xx-0-4-P |
| Flow Type | | Equal Percentage ^b | Linear ^b |
| Valve Body Materials | Body | Bronze | Bronze |
| | Seat | Bronze (VB-721x, VB-722x) | Bronze |
| | | Stainless Steel (VB-725x, VB-726x, VB-727x, VB-728x) | |
| | Stem | Stainless Steel | Stainless Steel |
| | Plug | Brass (VB-721x, VB-722x) | Brass (VB-73xx) |
| | | Stainless Steel (VB-725x, VB-726x, VB-727x, VB-728x) | Bronze (VB-931x) |
| | Packing | Spring-loaded PTFE | Spring-loaded PTFE |
| | Disc | EPDM (VB-721x, VB-722x) | — |
| | | PTFE (VB-725x, VB-726x) | |
| None (VB-727x, VB-728x) | | | |
| ANSI Pressure Class (Figure 3) | | 250 psig (1724 kPa), up to 400 psig (2758 kPa) below 150 °F (66 °C) ^c | 250 psig (1724 kPa), up to 400 psig (2758 kPa) below 150 °F (66 °C) ^b |
| Pressure Class (VB-7xx5) | | PN16 | PN16 |
| Rangeability | | See Table-1 | 500:1 |
| Seat Leakage | | ANSI Class IV (.01%) (VB-721x, VB-722x, VB-725x, VB-727x) ANSI Class III (0.1%) (VB-727x, VB-728x) | ANSI Class III (0.1%) |
| STEAM | | | |
| Inlet Pressure — Maximum | | 35 psig (241 kPa) | — |
| Fluid Temperature — Maximum | | 281 °F (138 °C) (VB-721x) | — |
| | | 340 °F (171 °C) (VB-725x, VB-726x) | |
| | | 400 °F (205 °C) (VB-727x, VB-728x) | |
| Allowable Differential Pressure | | 20 psi (138 kPa) | — |
| WATER | | | |
| Fluid Temperature — Minimum | | 1/2" through 2" 20 °F (-7 °C) 2½" and 3" 40 °F (4 °C) | 1/2" through 2" 20 °F (-7 °C) 2½" and 3" 40 °F (4 °C) |
| Fluid Temperature — Maximum | | 1/2" through 3" 281 °F (138 °C) | 1/2" through 3" 300 °F (149 °C) |
| Allowable Differential Pressure ^d | | 35 psi (241 kPa) Max. for Normal Lifespan | 35 psi (241 kPa) Max. for Normal Lifespan |

a - To determine a specific part number, see the Linked Globe Valve Assembly Part Numbering System.

b - See "2-Way Valves" or "3-Way Valves" for a detailed description of the flow.

c - See "2-Way Valves" or "3-Way Valves" for a detailed description of the flow.



d - Maximum recommended differential pressure. Do not exceed the recommended differential pressure (pressure drop) or the integrity of valve parts may be affected. Exceeding the maximum recommended differential pressure voids the product warranty.

© 2020 Schneider Electric. All rights reserved. All trademarks are owned by Schneider Electric Industries SAS or its affiliated companies.

January, 2020 to

Globe Valve Body Specifications

Table 6 Specifications for Flanged 2½" to 4" Vx-9xxx Series Globe Valve Bodies.

| Specifications Flanged Valve Bodies | | 2-Way | 3-Way |
|--|---------|---|---|
| | |  |  |
| Applications | | Chilled or Hot Water, or Steam | Chilled or Hot Water |
| Type of End Fitting | | Flanged | Flanged |
| Size | | 2½ in. through 4 in. | 2½ in. through 4 in. |
| Action | | Stem Up Open or Stem Up Closed | Mixing |
| Valve Assembly Series | | Vx-92xx-0-5-P | Vx-931x-0-5-P |
| Flow Type | | Equal Percentage ^a | Linear ^a |
| Valve Body Materials | Body | Cast Iron | Cast Iron |
| | Seat | Bronze | Bronze |
| | Stem | Stainless Steel | Stainless Steel |
| | Plug | Bronze | Bronze |
| | Packing | Spring-loaded PTFE | Spring-loaded PTFE |
| | Disc | Composite | — |
| ANSI Pressure Class (Figure 3) | | 125 psig (862 kPa), 200 psig (1379 kPa) below 150 °F (66 °C) ^b | 125 psig (862 kPa), 200 psig (1379 kPa) below 150 °F (66 °C) ^b |
| Rangeability | | 75:1 | Exceeds 500:1 |
| Seat Leakage | | ANSI Class IV (.01%) | ANSI Class III (0.1%) |
| STEAM | | | |
| Inlet Pressure — Maximum | | 35 psig (241 kPa) | — |
| Fluid Temperature — Maximum | | 281 °F (138 °C) | |
| Allowable Differential Pressure ^c | | 20 psi (138 kPa) | |
| WATER | | | |
| Fluid Temperature — Minimum | | 40 °F (4 °C) | 40 °F (4 °C) |
| Fluid Temperature — Maximum | | 281 °F (138 °C) | 300 °F (149 °C) |
| Allowable Differential Pressure ^c | | 35 psi (241 kPa) Max. for Normal Lifespan | 35 psi (241 kPa) Max. for Normal Lifespan |

a - See "2-Way Valves" or "3-Way Valves" for a detailed description of the flow.

b - Do not apply the above pressure rating to the piping system.

c - Maximum recommended differential pressure. Do not exceed the recommended differential pressure (pressure drop) or the integrity of valve parts may be affected. Exceeding the maximum recommended differential pressure voids the product warranty.

Actuator Specifications and Valve Assembly Mounting Dimensions

Valve Assemblies with MA51-710x, MF51-7103, and MS51-7103

1/2" (13 mm) Stroke 105 lbf (467 N) Linear Series Schneider Electric SmartX Actuators

Actuator Specifications

| | |
|---|--|
| Inputs | |
| Control Signal and Power Requirements (see table) | All 24 Vac circuits are Class 2. All circuits 30 Vac and above are Class 1 |
| Connections | |
| Connecting wiring | |
| Mx51-710x-0x0 | Appliance wire, 3 ft. (0.9 m) long |
| Mx51-710x-1x0 | Plenum cable, 3 ft. (0.9 m) long |
| Conduit connectors | |
| | Enclosure accepts 1/2" (13 mm) conduit connectors. For M20 metric connector, use AM-756 adaptor |
| Motor Type | Brush DC motor |
| Outputs | |
| Electrical: Position feedback voltage | |
| MF51-7103-xxx and MS51-7103-xxx | For voltage ranges, the feedback signal is the same range as the input signal. The 0...20 mAdc current range and floating actuators have a 2...10 Vdc position feedback signal. The position feedback signal can supply up to 0.5 mA to operate up to four additional slave actuators MS51-7103-140 has no feedback output. |
| Mechanical | |
| Output force rating | 105 lbf (467 N) |
| Linear stroke | 1/2" (13 mm) nominal |
| Timing | |
| Manual override | Allows valve positioning and preload adjustment, using manual crank |
| Reverse acting/direct acting jumper | |
| MS51-7103-xxx | Permits reverse acting or direct acting linear motion |

| | |
|-----------------------------------|--|
| Environmental | |
| Temperature Limits | |
| Shipping and storage | -40...160 °F (-40...71 °C) ambient |
| Operating | -22...140 °F (-30...60 °C) ambient |
| Temperature restrictions | For maximum ambient of 140 °F (60 °C), maximum fluid temperature must not exceed 366 °F (186 °C) |
| Humidity | 5...95% RH, non-condensing |
| Enclosure Rating | NEMA 2, UL Type 2 (IEC IP54) with customer-supplied watertight conduit connectors |
| Agency Listings (Actuator) | |
| UL | UL-873, Underwriters Laboratories File #E9429 Category Temperature-indicating and Regulating Equipment) |
| cUL | UL Listed for use in Canada by Underwriters Laboratories Canadian Standards C22.2 No. 24-93 |
| European Community | EMC Directive (89/336/EEC) |
| Australia | Low Voltage Directive (72/23/EEC) |
| | This product meets requirements to bear the RSM Mark according to the terms specified by the Communications Authority under the Radiocommunications Act 1992 |

| Part Number | Approximate Stroke Timing in Seconds @ 70 °F (21 °C) | |
|---------------|--|---------------|
| | Powered | Spring Return |
| MA51-710x-xxx | 27 | 19 |
| MF51-710x-xxx | 60 | 16 |
| MS51-710x-xxx | | |

| Part Number | Control Signal | Power Input | | | |
|------------------------------|--------------------------|--------------------------|------------------|-----|------------------|
| | | Voltage | Running 50/60 Hz | | Holding 50/60 Hz |
| | | | VA | W | |
| MA51-7100-000 | Two-position SPST | 120 Vac ±10% 50/60 Hz | 7.9 | 6.2 | 2.1 |
| MA51-7101-000 | | 230 Vac ±10% 50/60 Hz | 7.4 | 5.4 | 2.1 |
| MA51-7103-000, MA51-7103-100 | Floating SPST | 24 Vac ±20% 20 to 30 Vdc | 5.3 | 4.1 | 1.2 |
| MF51-7103-000, MF51-7103-100 | | | 6.9 | 4.7 | 2.1 |
| MS51-7103-000, MS51-7103-100 | 2...10 Vdc Proportional | | 6.6 | 4.2 | 1.5 |
| MS51-7103-020, MS51-7103-120 | 0...3 Vdc Proportional | | | | |
| MS51-7103-030, MS51-7103-130 | 6...9 Vdc Proportional | | 7.8 | 4.9 | 3.4 |
| MS51-7103-040, MS51-7103-140 | Proportional | | | | |
| MS51-7103-050, MS51-7103-150 | 0...10 Vdc Proportional | | 6.6 | 4.2 | 1.5 |
| MS51-7103-060, MS51-7103-160 | 2...20 mAdc Proportional | | | | |

Dimensions — 1/2" to 2" Globe Valve Assemblies

| Valve Assembly Part Number | Valve Size in. | Valve Dimensions in inches (mm) | | | | | | | | | | | | |
|---|----------------------|---|---------------|--------------|---------------|---------------|---|--------------|--------------|---------------|--|--|--|--|
| | | 2-Way (Refer to Figure-8, Figure-10, and Figure-11) | | | | | 3-Way (Refer to Figure-9 and Figure-12) | | | | | | | |
| | | A | B | C | E | J | A | C | E | J | | | | |
| Union Straightway 2-Way (N.C.) Vx-7221-8xx-4-P | 1/2 | 4-3/16 (106) | 2-11/16 (68) | 1-3/16 (30) | 7-7/16 (189) | 6-5/8 (168) | | | | | | | | |
| | 3/4 | 4-15/16 (125) | 3-3/16 (81) | 1-3/16 (30) | 7-7/16 (189) | 6-7/8 (175) | | | | | | | | |
| | 1 | 6 (152) | 3-5/8 (92) | 1-3/4 (44) | 7½ (190) | 7-3/8 (187) | | | | | | | | |
| | 1¼ | 6¼ (159) | 3-15/16 (100) | 1-3/4 (44) | 7-3/4 (197) | 7-3/8 (187) | | | | | | | | |
| Union Straightway 2-Way (N.O.) Vx-7211-8xx-4-P | 1/2 | 4-3/16 (106) | 2-11/16 (68) | 1-3/16 (30) | 7-7/16 (189) | 6-5/8 (168) | | | | | | | | |
| | 3/4 | 4-15/16 (125) | 3-3/16 (81) | 1-1/16 (27) | 7-7/16 (189) | 6-7/8 (175) | | | | | | | | |
| | 1 | 6 (152) | 3-5/8 (92) | 1-3/16 (30) | 8-1/8 (206) | 7-3/8 (187) | | | | | | | | |
| | 1¼ | 6¼ (159) | 3-15/16 (100) | 1-3/8 (35) | 8-1/8 (206) | 7-3/8 (187) | | | | | | | | |
| Flared 2-Way Vx-7212-8xx-4-P Vx-7222-8xx-4-P 3-Way Vx-7312-8xx-4-P | 1/2 | 4 (102) | — | 1-3/16 (30) | 7-7/16 (189) | 7-3/32 (180) | 4 (102) | 2¼ (57) | 7-7/16 (189) | 7-3/32 (180) | | | | |
| NPT/Metric Thread 2-Way (N.C.) Vx-722x-8xx-4-P Vx-726x-8xx-4-P Vx-728x-8xx-4-P 3-Way Vx-731x-8xx-4-P Vx-732x-8xx-4-P | 1/2 | 3-1/16 (78) | | 1-3/16 (30) | 7-7/16 (189) | 6-5/8 (168) | 3-1/16 (78) | 1-3/4 (44) | 7-7/16 (189) | 6-5/8 (168) | | | | |
| | 3/4 | 3-5/8 (92) | | 1-3/16 (30) | 7-7/16 (189) | 6-7/8 (175) | 3-5/8 (92) | 1-13/16 (46) | 7-7/16 (189) | 6-7/8 (175) | | | | |
| | 1 | 4-5/8 (118) | | 1-3/4 (44) | 7½ (190) | 7-3/8 (187) | 4-5/8 (118) | 1-3/4 (44) | 7½ (191) | 7-3/8 (187) | | | | |
| | 1¼ | 4-5/8 (118) | | 1-3/4 (44) | 7-3/4 (197) | 7-3/8 (187) | 4-5/8 (118) | 1-3/4 (44) | 7-3/4 (197) | 7-3/8 (187) | | | | |
| | 1½ | 5-3/8 (137) | | 1-13/16 (46) | 7-7/8 (200) | 7-13/16 (198) | 5-3/8 (137) | 1-13/16 (46) | 7-7/8 (200) | 7-13/16 (198) | | | | |
| | 2 | 6-1/8 (156) | | 2¼ (57) | 8-9/16 (217) | 8-5/32 (208) | 6-1/8 (156) | 2¼ (57) | 8-9/16 (217) | 8-5/32 (208) | | | | |
| NPT/Metric Thread 2-Way (N.O.) Vx-721x-8xx-4-P Vx-725x-8xx-4-P Vx-727x-8xx-4-P | 1/2 | 3-1/16 (78) | | 1-3/16 (30) | 7-7/16 (189) | 6-5/8 (168) | | | | | | | | |
| | 3/4 | 3-5/8 (92) | 1-1/16 (27) | 7-7/16 (189) | 6-7/8 (175) | | | | | | | | | |
| | 1 | 4-5/8 (118) | 1-3/16 (30) | 8-1/8 (206) | 7-3/8 (187) | | | | | | | | | |
| | 1¼ | 4-5/8 (118) | 1-3/8 (35) | 8-1/8 (206) | 7-3/8 (187) | | | | | | | | | |
| | 1½ | 5-3/8 (137) | 1½ (38) | 8-3/16 (208) | 7-13/16 (198) | | | | | | | | | |
| | 2 | 6-1/8 (156) | 1-9/16 (40) | 8-7/16 (214) | 8-5/32 (208) | | | | | | | | | |

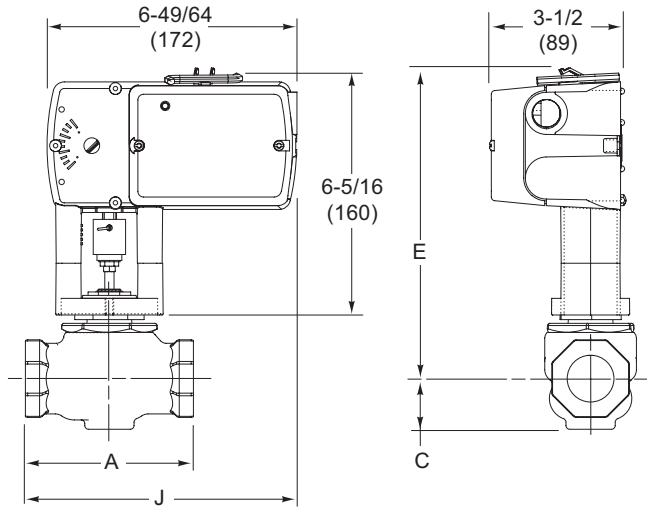


Figure 8 Mx51-710x with 2-Way Globe Valve.

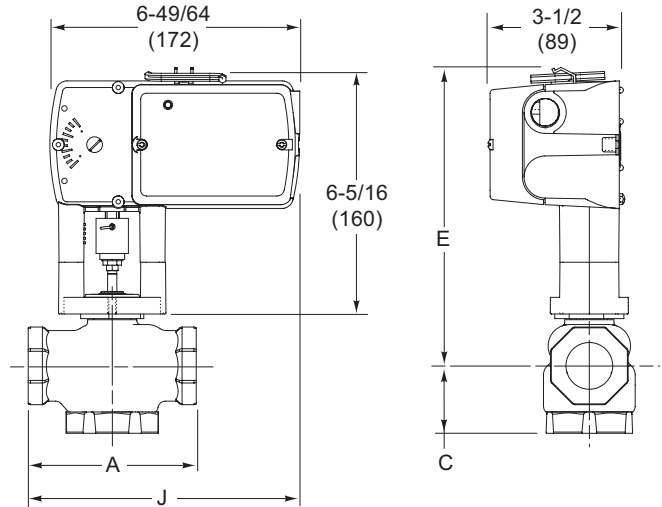


Figure 9 Mx51-710x with 3-Way Globe Valve.

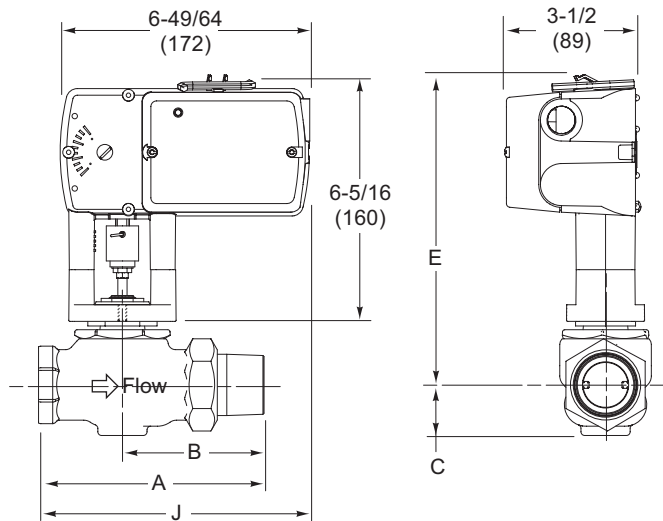
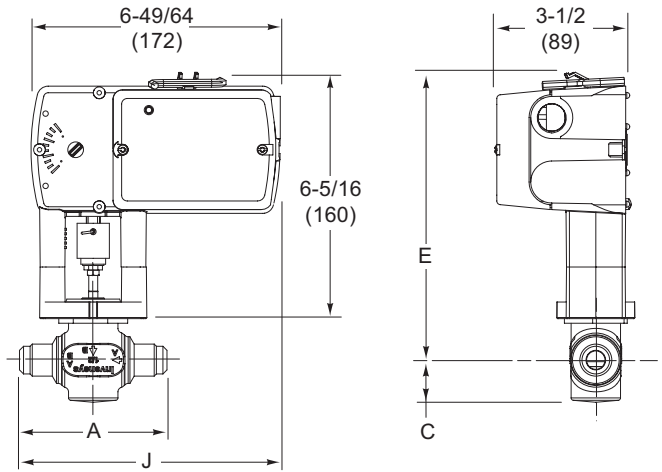
Figure 10 Mx51-710x with 2-Way Union
Straightway Globe Valve.

Figure 11 Mx51-710x with 2-Way Flared Globe Valve.

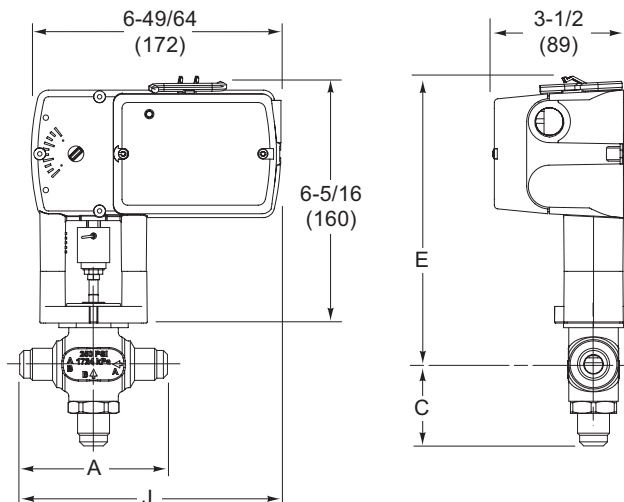


Figure 12 Mx51-710x with 3-Way Flared Globe Valve.

Valve Assemblies with MA51-720x, MF51-7203, and MS51-7203 1/2" (13 mm) Nominal Stroke 220 lbf (979 N) Linear Series SmartX Actuators

Actuator Specifications

| | |
|--|---|
| Inputs | |
| Control Signal and Power Requirements (see table) | All 24 Vac circuits are Class 2 All circuits 30 Vac and above are Class 1 |
| Connections | |
| Connecting wiring | Appliance cable, 3 ft. (91 cm) long |
| Conduit connectors | Enclosure accepts 1/2" (13 mm) conduit connectors. For M20 metric connector, use AM-756 adaptor |
| Motor Type | |
| Outputs | Brushless DC |
| Electrical | |
| Position feedback voltage: MS51-7203 | 2...10 Vdc (max. 0.5 mA) |
| output signal for position feedback or to operate up to four additional slave actuators. | |

| Part Number | Control Signal | Voltage | Power Input | | | | | |
|-------------|-------------------------------------|--------------------------------|-------------|-----|-------|-----|---------|------------|
| | | | Running | | | | DC Amps | Holding |
| | | | 50 Hz | | 60 Hz | | | 50 / 60 Hz |
| | | | VA | W | VA | W | | W |
| MA51-7200 | Two-position SPST or Triacs | 120 Vac ±10% 50/60 Hz | 11.7 | 8.8 | 10.0 | 8.4 | — | 3.6/5.0 |
| MA51-7201 | | 230 Vac ±10% 50/60 Hz | 15.5 | 9.5 | 10.6 | 8.5 | — | 4.6/3.3 |
| MA51-7203 | | 24 Vac ±20% 22...30 Vdc | 9.8 | 7.5 | 9.7 | 7.5 | 0.29 | 2.8 |
| MF51-7203 | Floating Point SPDT or Triacs | 24 Vac ±20% 22 to 30 Vdc | 9.8 | 7.7 | 9.7 | 7.7 | 0.30 | 3.3 |
| MS51-7203 | Proportional 2...10 Vdc or 4-20 Vdc | | 9.8 | 7.4 | 9.7 | 7.4 | 0.28 | 2.9 |

| | |
|--|--|
| Mechanical | |
| Output force rating | 220 lbf (979 N) |
| Linear stroke | 1/2" (13 mm) nominal |
| Timing @ 70 °F (21 °C) | Approximately 100 seconds powered; 35 seconds spring return |
| Measured with no load applied to actuator | |
| Manual override | |
| Allows valve positioning and preload adjustment, using manual crank | |
| Right/left switch: MS51-7203 | |
| Permits reverse acting or direct acting linear motion | |
| Environmental | |
| Temperature Limits | |
| Shipping and storage | -40...160 °F (-40...71 °C) ambient |
| Operating | 0 °F (-18 °C) to maximum ambient shown in table below |
| Temperature restrictions | |
| Humidity | 15...95% RH, non-condensing |
| Enclosure Rating | |
| NEMA 2, UL Type 2 (IEC IP54) with customer-supplied watertight conduit connectors. | |

| | |
|-----------------------------------|---|
| Agency Listings (Actuator) | |
| UL | UL-873, Underwriters Laboratories File #E9429 Category Temperature-indicating and Regulating Equipment |
| cUL | UL Listed for use in Canada by Underwriters Laboratories |
| European Community | Canadian Standards C22.2 No. 24-93 EMC Directive (89/336/EEC) |
| Australia | Low Voltage Directive (72/23/EEC) This product meets requirements to bear the RSM Mark according to the terms specified by the Communications Authority under the Radiocommunications Act 1992 |

| Part Number | | Max. Allowable Ambient @ Max. Fluid Temperatures |
|-------------|----------------------------------|--|
| Actuator | Valve Assembly | |
| Mx51-720x | Vx-721x-59x-4-P, Vx-722x-59x-4-P | 140 °F (60 °C) @ 281 °F (138 °C) |
| | Vx-73xx-59x-4-P | 120 °F (49 °C) @ 300 °F (149 °C) |
| | Vx-725x-59x-4-P, Vx-726x-59x-4-P | 100 °F (38 °C) @ 340 °F (171 °C) |
| | Vx-727x-59x-4-P, Vx-728x-59x-4-P | 90 °F (32 °C) @ 366 °F (186 °C) |

Dimensions — 1/2" to 2" Globe Valve Assemblies

| Valve Assembly Part Number | Valve Size in. | Valve Dimensions in inches (mm) | | | | | | | |
|---|----------------|---------------------------------|--------------|---------------|----------------|----------------------------|--------------|--------------|----------------|
| | | 2-Way (Refer to Figure 13) | | | | 3-Way (Refer to Figure 14) | | | |
| | | A | C | E | J | A | C | E | J |
| NPT/Metric Thread 2-Way (N.C.) Vx-722x-59x-4-P Vx-725x-59x-4-P Vx-726x-59x-4-P Vx-727x-59x-4-P Vx-728x-59x-4-P 3-Way Vx-73xx-59x-4-P | 1¼ | 4-5/8 (117) | 1-3/4 (44) | 8-3/8 (213) | 11-11/16 (297) | 4-5/8 (117) | 1-3/4 (44) | 8-3/8 (213) | 11-11/16 (297) |
| | 1½ | 5-3/8 (137) | 1-13/16 (46) | 8½ (216) | 12-1/16 (306) | 5-3/8 (137) | 1-13/16 (46) | 8½ (216) | 12-1/16 (306) |
| | 2 | 6-1/8 (156) | 2¼ (57) | 9-3/16 (233) | 12-7/16 (316) | 6-1/8 (156) | 2¼ (57) | 9-3/16 (233) | 12-7/16 (316) |
| | 2 | 6-1/8 (156) | 2¼ (57) | 9-3/16 (233) | 12-7/16 (316) | 6-1/8 (156) | 2¼ (57) | 9-3/16 (233) | 12-7/16 (316) |
| NPT/Metric Thread 2-Way (N.O.) Vx-721x-59x-4-P | 1¼ | 4-5/8 (117) | 1-3/8 (35) | 8-3/4 (222) | 11-11/16 (297) | — | | | |
| | 1½ | 5-3/8 (137) | 1½ (38) | 8-13/16 (224) | 12-1/16 (306) | | | | |
| | 2 | 6-1/8 (156) | 1-9/16 (40) | 9-1/16 (230) | 12-7/16 (316) | | | | |

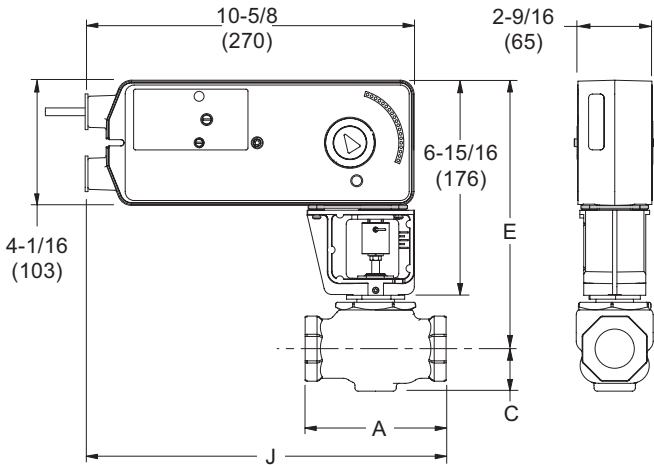


Figure 13 Mx51-720x with 1/2" to 2" 2-Way Globe Valve.

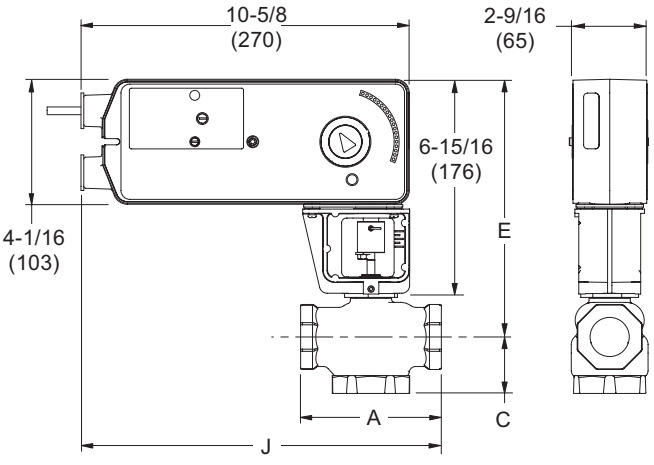


Figure 14 Mx51-720x with 1/2" to 2" 3-Way Globe Valve.

Valve Assemblies with MA61-720x, MF61-7203, and MS61-7203 1" (25 mm) Nominal Stroke 220 lbf (979 N) Linear Series SmartX Actuators

Actuator Specifications

| | |
|---|---|
| Inputs | |
| Control Signal and Power Requirements(see table) | All 24 Vac circuits are Class 2 All circuits 30 Vac and above are Class 1 |
| Connections | |
| Connecting wiring | Appliance cable, 3 ft. (91 cm) long |
| Conduit connectors | Enclosure accepts 1/2" (13 mm) conduit connectors. For M20 metric connector, use AM-756 adaptor |
| Motor Type | Brushless DC. |
| Outputs | |
| Electrical Position feedback voltage | 2...10 Vdc (max. 0.5 mA) |
| MS61-7203 | output signal for position feedback or to operate up to four additional slave actuators. MS61-7203-040 does not have feedback. |
| Mechanical | |
| Output force rating | 220 lbf (979 N) minimum; 495 lbf (2202 N) maximum stall |
| Linear stroke | 1" (25 mm) nominal |
| Timing @ 70 °F (21 °C) | Approximately 190 seconds powered; 40 seconds spring return Measured with no load applied to actuator |
| Manual override | Allows valve positioning and preload adjustment, using manual crank |
| Right/left switch | |
| MS61-7203 | Permits reverse acting or direct acting linear motion. |

| | |
|----------------------------|---|
| Environmental | |
| Temperature Limits | |
| Shipping and storage | -40...160 °F (-40...71 °C) ambient |
| Operating | 0 °F (-18 °C) to maximum ambient shown in table below |
| Temperature restrictions | |
| Humidity | 15...95% RH, non-condensing |
| Enclosure Rating | NEMA 2, UL Type 2 (IEC IP54) with customer-supplied watertight conduit connectors. |
| Agency Listings (Actuator) | UL |
| UL | UL-873, Underwriters Laboratories File #E9429 Category Temperature-indicating and Regulating Equipment |
| cUL | UL Listed for use in Canada by Underwriters Laboratories. Canadian Standards C22.2 No. 24-93 |
| European Community | EMC Directive (89/336/EEC) |
| Australia | Low Voltage Directive (72/23/EEC) |
| | This product meets requirements to bear the RSM Mark according to the terms specified by the Communications Authority under the Radiocommunications Act 1992. |

| Part Number | | Max. Allowable Ambient @ Max. Fluid Temperatures |
|-------------|------------------------------------|--|
| Actuator | Valve Assembly | |
| Mx61-720x | Vx-9xxx-59x-4-P Vx-9xxx-59x-5-P | 140 °F (60 °C) @ 300 °F (149 °C) |

| Part Number | Control Signal | Power Input | | | | | | |
|-------------|-------------------------------------|-----------------------------|---------|-----|-------|-----|---------|----------|
| | | Voltage | Running | | | | DC Amps | Holding |
| | | | 50 Hz | | 60 Hz | | | 50/60 Hz |
| | | | VA | W | VA | W | | W |
| MA61-7200 | Two-position SPST or Triacs | 120 Vac ±10% 50/60 Hz | 11.7 | 8.8 | 10.0 | 8.4 | — | 3.6/5.0 |
| MA61-7201 | | 230 Vac ±10% 50/60 Hz | 15.5 | 9.5 | 10.6 | 8.5 | — | 4.6/3.3 |
| MA61-7203 | | 24 Vac ±20% 22 to 30 Vdc | 9.8 | 7.5 | 9.7 | 7.5 | 0.29 | 2.8 |
| MF61-7203 | Floating Point SPDT or Triacs | 24 Vac ±20% 22 to 30 Vdc | 9.8 | 7.7 | 9.7 | 7.7 | 0.30 | 3.3 |
| MS61-7203 | Proportional 2...10 Vdc or 4-20 Vdc | | 9.8 | 7.4 | 9.7 | 7.4 | 0.28 | 2.9 |

Dimensions — 2½" and 3" Screwed Globe Valve Assemblies

| Valve Assembly Part Number | Valve Size in. | Valve Dimensions in inches (mm) | | | | | | | |
|--|----------------|---------------------------------|--------------|----------------|---------------|----------------------------|-------------|----------------|---------------|
| | | 2-Way (Refer to Figure-15) | | | | 3-Way (Refer to Figure-16) | | | |
| | | A | C | E | J | A | C | E | J |
| NPT/Metric Thread 2-Way (N.O.) Vx-9213-59x-4-P Vx-9215-59x-4-P 2-Way (N.C.) Vx-9223-59x-4-P Vx-9225-59x-4-P 3-Way Vx-9313-59x-4-P Vx-9315-59x-4-P | 2½ | 8½ (216) | 3-13/16 (97) | 13-15/16 (354) | 13-9/16 (344) | 8½ (216) | 4-5/8 (117) | 13-15/16 (354) | 13-9/16 (344) |
| | 3 | 9½ (241) | 4¼ (108) | 14¼ (362) | 13-5/8 (346) | 9½ (241) | 5 (127) | 14¼ (362) | 13-5/8 (348) |

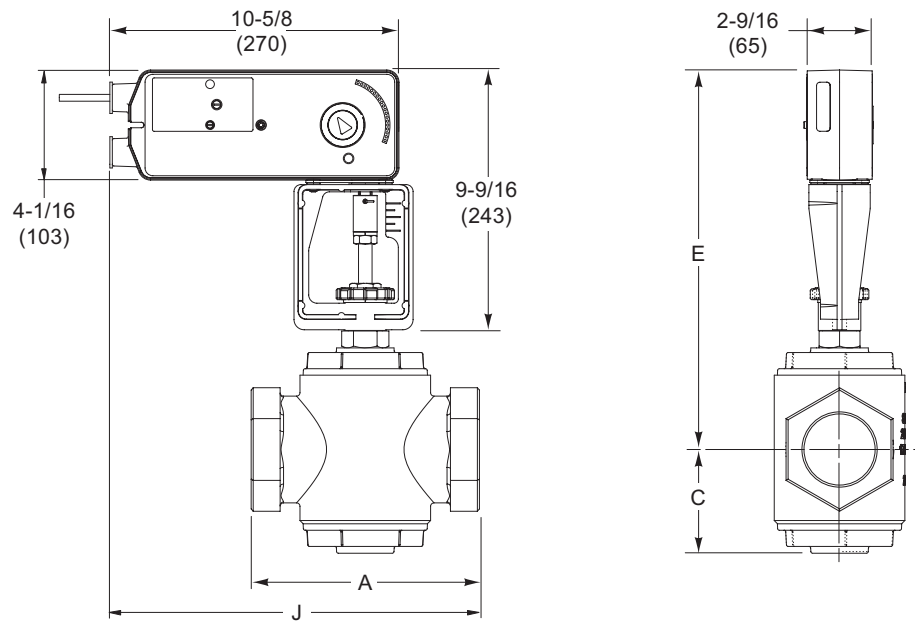


Figure 15 Mx61-720x with 2½" or 3" 2-Way Screwed Globe Valve.

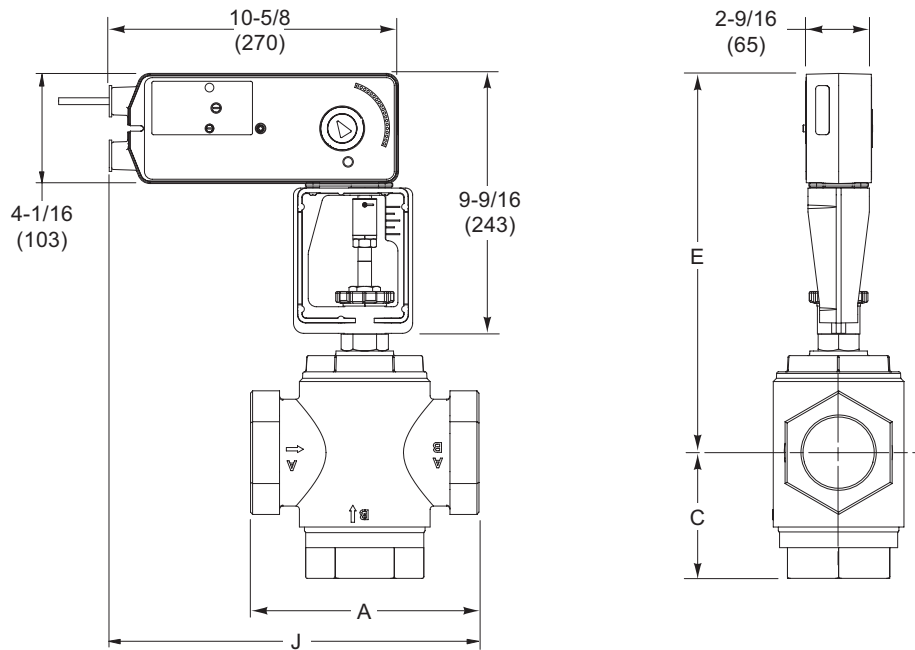


Figure 16 Mx61-720x with 2½" or 3" 3-Way Screwed Globe Valve.

Dimensions — 2½” to 4” Flanged Globe Valve Assemblies

| Valve Assembly Part Number | Valve Size in. | Valve Dimensions in inches (millimetres) | | | | | | | | | | | |
|--|----------------------|--|-------------|--------------|----------|----------|--------------|----------------------------|-------------|--------------|----------|----------|--------------|
| | | 2-Way (Refer to Figure-17) | | | | | | 3-Way (Refer to Figure-19) | | | | | |
| | | A | C | E | F | G | J | A | C | E | F | G | J |
| ASA Flanged 2-Way (N.O.) Vx-9213-59x-5-P 3-Way Vx-9313-59x-5-P | 2½ | 8½ (216) | 3½ (89) | 13 (330) | 7 (178) | 5½ (140) | 13-5/8 (346) | 8½ (216) | 5-3/8 (137) | 13-3/4 (349) | 7 (178) | 5½ (140) | 13-5/8 (346) |
| | 3 | 9½ (241) | 3-3/4 (95) | 14½ (368) | 7½ (191) | 6 (152) | 14-1/8 (359) | 9½ (241) | 6-3/8 (162) | 14 (356) | 7½ (191) | 6 (152) | 14-1/8 (359) |
| | 4 | 11½ (292) | 4½ (114) | 15-3/8 (391) | 9 (229) | 7½ (191) | 15-1/8 (384) | 11½ (292) | 8½ (216) | 14-3/4 (375) | 9 (229) | 7½ (191) | 15-1/8 (384) |
| ASA Flanged 2-Way (N.C.) Vx-9223-59x-5-P | 2½ | 8½ (216) | 4 (107) | 12-3/8 (314) | 7 (178) | 5½ (140) | 13-5/8 (346) | — | | | | | |
| | 3 | 9½ (241) | 5 (127) | 12-5/8 (320) | 7½ (191) | 6 (152) | 14-1/8 (359) | | | | | | |
| | 4 | 11½ (292) | 7-1/8 (181) | 13-3/8 (340) | 9 (229) | 7½ (191) | 15-1/8 (384) | | | | | | |

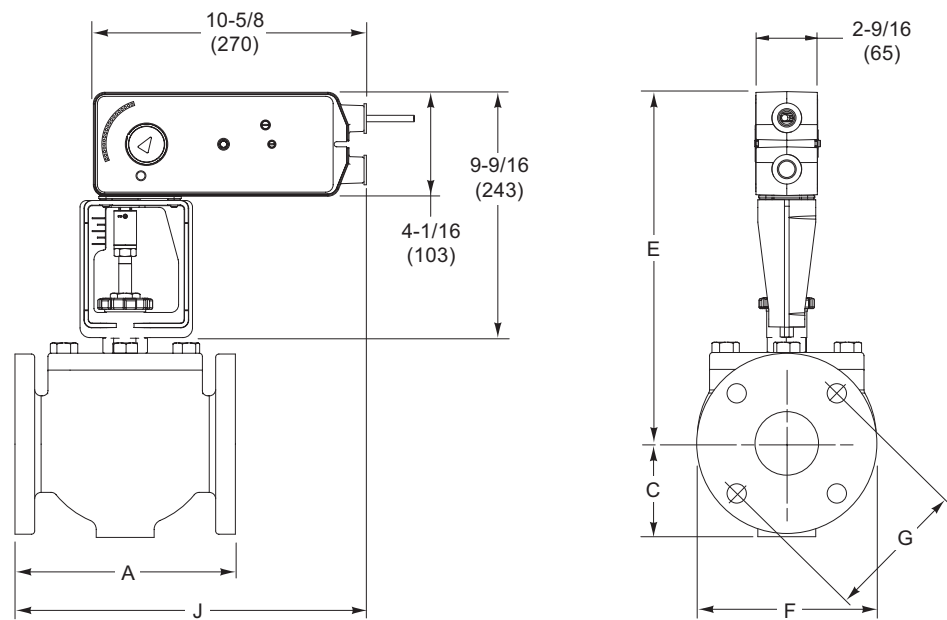


Figure 17 Mx61-720x with 2½” to 4” N.O. 2-Way Flanged Globe Valve.

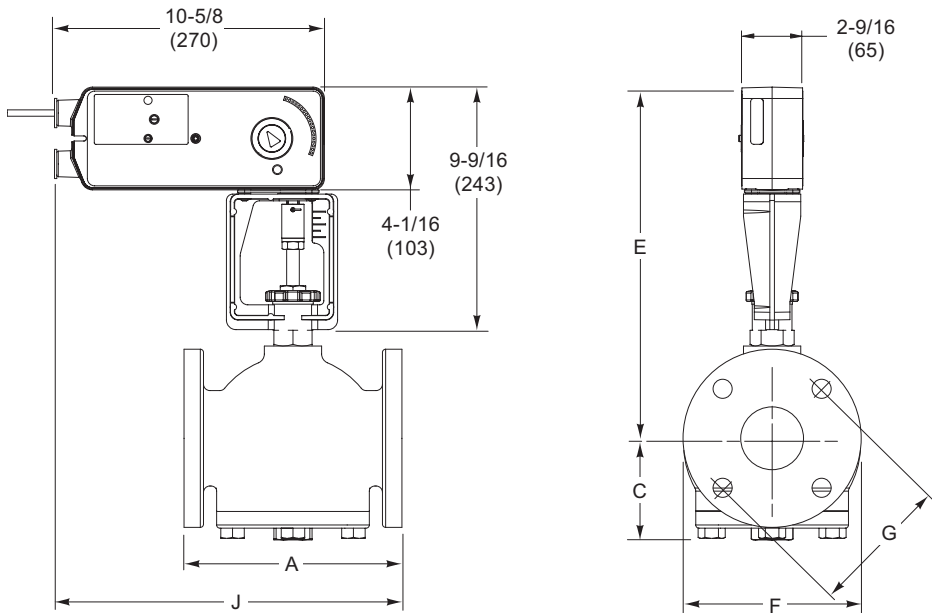


Figure-18 Mx61-720x with 2-1/2" to 4" N.C. 2-Way Flanged Globe Valve.

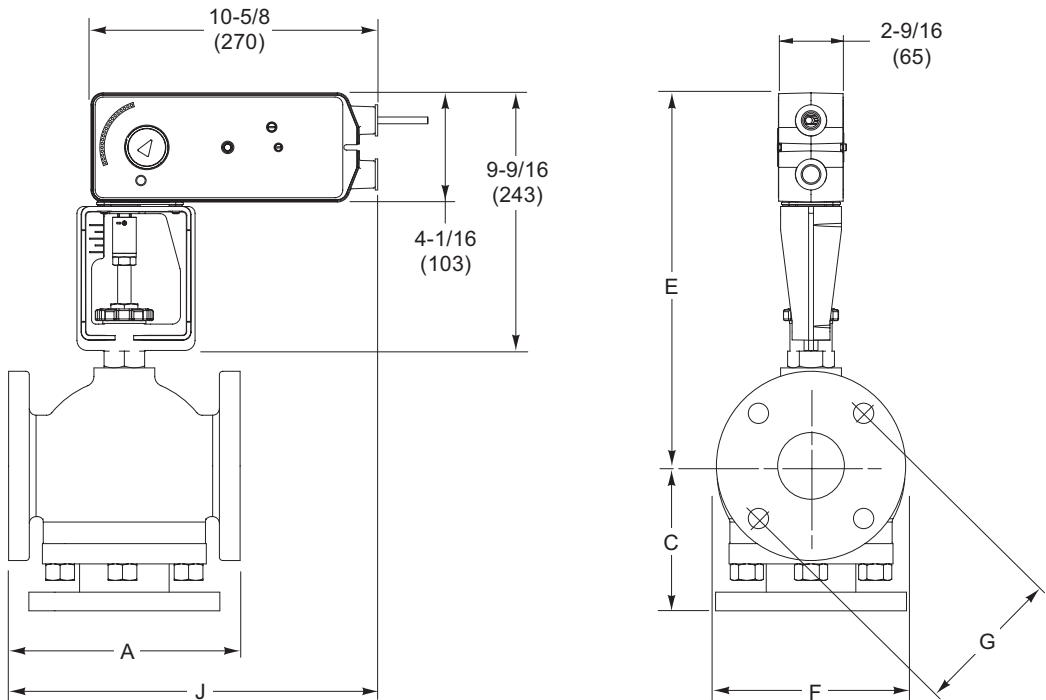


Figure-19 Mx61-720x with 2-1/2" to 4" 3-Way Flanged Globe Valve.