


# Truflo® — OBS-A Series

## Panel Mount Pressure Gauge & Gauge Guard

ICON™ Corrosion-Free  
PROCESS CONTROLS Instrumentation Equipment™

- ✓ All Plastic One-Piece Design
- ✓ No Filling or Assembly Required
- ✓ Completely Corrosion Resistant

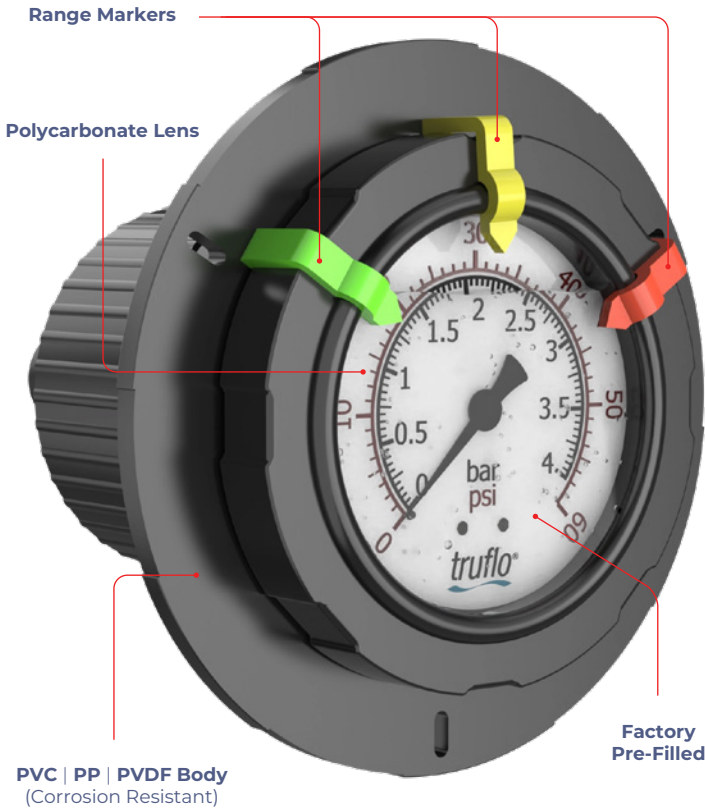

### Pressure Range Markers

- ✓ Notification for Filter | Strainer Change-Out
- ✓ Easily Customizable to your Process Conditions
- ✓ Eliminates Manual Marking on Gauge
- ✓ **Red** | **Yellow** | **Green** — Markers

### Factory Pre-Filled

- ✓ Reduces Installation Time
- ✓ Increases Accuracy
- ✓ Eliminates the Mess of Self-Filling
- ✓ Removes Air Bubble Issues



### Features

- ✓ Industry's Most Accurate |  $\pm 1.5\%$
- ✓ PVC | PP | PVDF
- ✓ Teflon® Bonded Diaphragm
- ✓ Large 2 1/2" Dial
- ✓ Dual Scale | Psi | Bar

truflo®

### Cutting-Edge One-Piece Plastic Pressure Gauges for Corrosive Environments

The OBS-A Series is the industry's only integral molded one-piece plastic pressure gauge and gauge guard. Gauge guards are utilized to protect the pressure gauge from any corrosive media in the process system via an isolator.

OBS-A pressure gauges are a one-piece design and come factory pre-filled, resulting in an industry leading accuracy of 1.5%. Eliminating the need for filling saves the user time and the difficulty of having to fill a gauge isolator.

The 3 movable red, yellow and green range tabs are designed to act as a visual pressure alert for bag or filter change-outs.

The OBS-A Series is available in PVC, PP & PVDF, all equipped with a Teflon® diaphragm, making the entire unit completely corrosion resistant and the perfect pressure gauge for chemical applications.

Engineering the entire body in a plastic housing rather than just the gauge guard allows users to be confident that the complete unit will stand up in even the most corrosive environments.

### Integral Molded Gauge | Gauge Guard

- ✓ No Assembly or Filling Required
- ✓ Increased Accuracy Compared to Two-Piece Gauge + Gauge Guard
- ✓ Convoluted Teflon® Diaphragm for Higher Sensitivity
- ✓ Suitable for Chemical Applications

PVC

PP

PVDF

PTFE

RoHS  
Compliant CE

1.888.610.7664

 [www.calcert.com](http://www.calcert.com)

[sales@calcert.com](mailto:sales@calcert.com)

# Truflo® — OBS-A Series

## Panel Mount Pressure Gauge & Gauge Guard




### Technical Specifications

Mounting	Panel Mount   Back Connection
Process Connection	½" MNPT   FNPT   G   Flanged
Measuring Principle	Bourdon Tube   316SS
Pressure Ranges   Psi	0-15   0-30   0-60   0-100   0-160   0-200
Lens	High Impact Polycarbonate
Filling	Glycerin   Silicon*   Halocarbon*
Accuracy	± 1.5%
Operating Temperature	PVC: 140°F   60°C PP: 190°F   88°C PVDF: 240°F   115°C
Dial Diameter	2 ½"
Standards & Approvals	CE   FCC   RoHS Compliant

\*Optional

### Installation Instructions

- Do not tighten by grasping the case of the gauge as this may cause damage. Always Pressure Test Connections for Leaks with Water Prior to Use on Chemical Service.
- Before installing the OBS-A Series pressure gauge, ensure attention is given to the Process Liquid, Chemical Compatibility, Temperature, Vibration, Pressure Spikes, and other climatic and application conditions that may adversely affect the performance.
- The user shall ensure that the correct gauge pressure range and the correct materials of construction are selected.

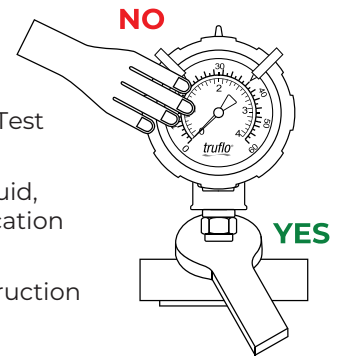

### Temperature | Pressure Graphs | Non-Wetted

**Note:** The pressure/temperature graphs are specifically for the Truflo® Pressure Gauges, during system design the specifications of all components must be considered.

### Model Selection

OBS-A — Gauge + Guard Combo		
Size	Part Number	Material
½"	OBS-A-P-0-X	PVC
½"	OBS-A-PP-0-X	PP
½"	OBS-A-PF-0-X	PVDF

X = Max Pressure

- 15 ▶ 0 - 15 Psi    100 ▶ 0 - 100 Psi  
30 ▶ 0 - 30 Psi    160 ▶ 0 - 160 Psi  
60 ▶ 0 - 60 Psi    200 ▶ 0 - 200 Psi

End Connection Options

- Socket PVC  
Flanged PP | PVDF  
Butt Fused PP | PVDF

½" FNPT is standard

Add Suffix -

'M' - Male ½" NPT    'F' - Flanged    'S' - ½" Socket

\*Consult Factory for Alternative Pressure Ratings

■ = PVC    ■ = PP    ■ = PVDF

