




ALL STAINLESS STEEL LOW PRESSURE GAUGE


REOTEMP's Series PC low pressure gauges offer accurate and reliable measurements of gaseous media. Offered with stainless steel internals, the Series PC is designed to withstand corrosive media and ensure a long-lasting instrument.

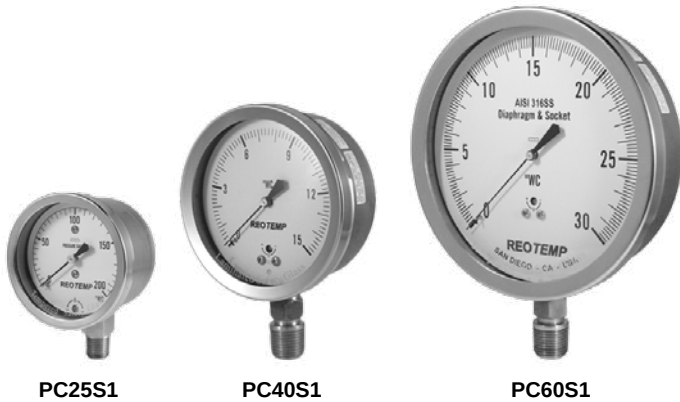


PC25S1




*dimensions in inches




PC40S1



*dimensions in inches

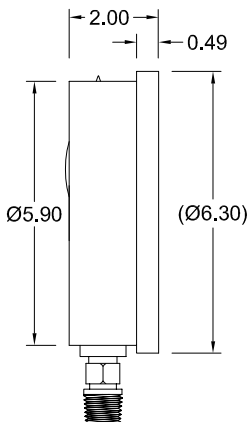

PC60S1

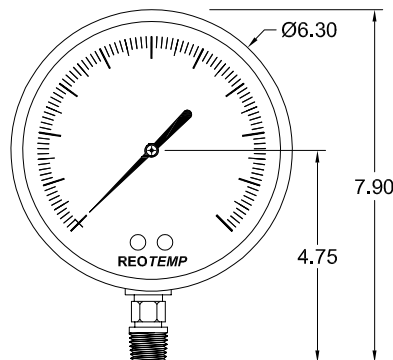

*dimensions in inches



Dials



Custom Logo



Diaphragm Seal
Compatible

FEATURES / BENEFITS

- Sensitive Diaphragm/Capsule Mechanism
- All-Welded 316 Stainless Steel Capsule and Socket
- Easy-Access Zero Reset Screw on Dial



SPECIFICATIONS

Accuracy	2 - 1.6 - 2%
Ambient Limits	-40°F/150°F
Process Limits	-40°F/200°F
Process Limits with Diaphragm Seal	-60°F/350°F (Direct Mount)* -110°F/750°F (Remote Mount or Cooling Tower)* *Exact limits depend on diaphragm seal and fill fluids.
Wetted Materials	Capsule: 316LSS Socket: 316SS
Lens	Tempered Safety Glass (Standard), Plastic or Laminated Safety Glass
Other Materials	Case: 304SS Ring: 304SS, Bayonet Twist-Off Dial: White Aluminum, Black Letters Case-to-Socket: Screw Connection, Vented Case
Fillable	No
Restrictor Screw	Yes
Maximum Working Pressure	Stable = 100% Momentary = 130% of scale
Weight	2.5" = 0.5 lbs 4" = 1.1 lbs 6" = 2.1 lbs

ALL STAINLESS STEEL LOW PRESSURE GAUGE

HOW TO ORDER: Choose options to build a part number. For example: **PC40S1A2P52-D-T-HV**

PC40	S	1	A	2	P52	-D	-T	-HV
DIAL SIZE	CASE TYPE	CAPSULE & SOCKET	MOUNT TYPE	CONNECTION	RANGE CODE	CASE FILL	LENS	OPTIONS
PC25 = 2.5"	S = 304SS Case & Bezel w/ Removable Bayonet, Zero Correction on Dial	1 = 316SS	A = Bottom B = Bottom/Rear Flange *C = Center Back *D = Center Back "U" Clamp *E = Center Back/Front Flange	4 = 1/4" NPT	Common Ranges P50 = 0-10 in H ₂ O P51 = 0-15 in H ₂ O P52 = 0-30 in H ₂ O P53 = 0-60 in H ₂ O P54 = 0-100 in H ₂ O P55 = 0-160 in H ₂ O P56 = 0-200 in H ₂ O Available Ranges ■ 10" to 300" Water Column ■ Gauge Pressure, Vacuum, or Compound	-D = Dry Case is not fillable.	-T = Tempered Safety Glass (Standard) -P = Plastic -S = Laminated Safety Glass	-HV = Hi-Vis™ Dial -OX = Cleaned for O ₂ Service -C3 = 3 pt. Calibration Certificate -TS = Stainless Steel Tag -NC = NACE Compliance Certificate -PM = Positive Material Identification Certification -R5 = 1.5% Full Scale Accuracy (Not Available on Compound Ranges)
PC40 = 4" PC60 = 6"			A = Bottom B = Bottom/Rear Flange *C = Lower Back *E = Lower Back/Front Flange	4 = 1/4" NPT 2 = 1/2" NPT	Standard Units ■ in H ₂ O Available Units ■ kPa ■ inHg ■ mbar ■ mmHg ■ psi ■ oz/in ² ■ mmH ₂ O ■ & more			
					For Additional Range Codes See Page 46			

*Non-standard configuration

Diaphragm Seal Suitability Guide

Low pressure capsule gauges are very sensitive and require diaphragm seals with high sensitivity and high fluid displacement. If a diaphragm seal is required to isolate the process fluid from the pressure gauge, the following seal model types are available for the Series PC.

Diaphragm Seal Model

High Displacement



Total Gauge Span* (in H₂O)

	10"	15"	20"	30"	40"	60"	100"	160"	200"	300"
W6	X	X	X	X	X	X	S	S	T	T
W7	X	X	X	S	S	T	T	T		
V5	X	S	S	T	T	T	T	T		
T6	X	X	X	X	X	S	S	S	S	S

*Total gauge span is additive of negative and positive pressures.

Example: -15 - 0 - 30 psi = 45 psi span

Assembly will function correctly with minimal accuracy degradation.

Assembly will function correctly given stable temperature.

Assembly is highly sensitive to orientation and temperature variance. REOTEMP cannot guarantee a stated accuracy.

Assembly will not work. The diaphragm does not displace enough fill fluid to drive the pressure gauge.

Master Range Code Sheet

PRESSURE GAUGE RANGES AND CODES

SPECIAL RANGE TYPES

Receiver Ranges			Refrigerant Ranges			Tank Level Ranges	
Code	Element	Dial Range	Code	Dial Range	Refrigerant	Code	Range
P60	3-15 psi	0-100%	N06	-30inHg to 160 psi	Ammonia	F14	0-24ft H ₂ O
P61	3-15 psi	0-10 sq rt	R06	-30inHg to 160 psi	R134A	F15	0-30ft H ₂ O
P62	3-15 psi	0-100% & 0-10 sq.rt.	R06A	-30inHg to 160 psi	R22	F15C	0-40ft H ₂ O
			R06C	-30inHg to 160 psi	R404A	F16	0-60ft H ₂ O
			N07	-30inHg to 200 psi	Ammonia	F165	0-100ft H ₂ O
			N08	-30inHg to 300 psi	Ammonia		

LOW PRESSURE RANGES (PC SERIES ONLY)

Low Pressure Ranges										
inH ₂ O		oz/in ²		inH ₂ O & oz/in ²		mbar		psi		
Code	Range	Code	Range	Code	Range	Code	Range	Code	Range	
P50	0-10 inH ₂ O	Z50	0-6 oz/in ²	Q50Z	0-10 inH ₂ O & 0-6 oz/in ²	M51	0-40 mbar			
P51	0-15	Z51	0-8	Q49C	0-20 & 0-12					
P49	0-20	Z49	0-10							
P515	0-25	Z52E	0-15							
P52	0-30	Z52	0-20	Q52N	0-30 & 0-18	M521	0-70	I52	0-1 psi	
P525	0-40			Q525W	0-40 & 0-24	M525	0-100	I53	0-2	
P53	0-60			Q53	0-60 & 0-35	M53F	0-150			
P54	0-100			Z54	0-60	Q54B	0-100 & 0-60	M54	0-250	I54
P55	0-160	Z56	0-100	Q56C	0-200 & 0-115	M55	0-400	I55	0-5	
P56	0-200					M56	0-500	I56	0-7	
Vacuum Ranges										
P88	-10-0 inH ₂ O	Z88	-6-0 oz/in ²	Q88	-10/0 inH ₂ O & -6/0 oz/in ²					
P90	-30-0	Z90	-20-0	Q90	-30/0 & -18/0	M905	-100-0 mbar	I90	-1-0 psi	
P91	-60-0	Z91	-30-0	Q91	-60/0 & -35/0	M94	-200-0	I91	-2-0	
P92	-100-0	Z92	-60-0	Q92	-100/0 & -60/0	M95	-400-0			
Compound Ranges										
P7A	-5/0/5 inH ₂ O	Z7A	-3/0/3 oz/in ²	Q70C	-10/0/10 inH ₂ O & -6/0/6 oz/in ²	M71	-20/0/20 mbar			
P70	-10/0/10					M72E	-30/0/30			
P71	-15/0/15					M72	-40/0/40			
P72	-20/0/20	Z72	-10/0/10	Q72C	-20/0/20 & -12/0/12		I73			-1-0-1 psi
P73	-30/0/30	Z745	-30/0/30	Q73C	-30/0/30 & -18/0/18	M735	-100/0/100	I74	-2-0-2	
P74	-60/0/60								I55U	-3/0/3
P75	-100/0/100			Q75B	-100/0/100 & -60/0/60				P14C	-5/0/5

DIFFERENTIAL PRESSURE RANGES (DP GAUGES ONLY)

psid		inH ₂ Od		bard		mbard		kPad	
Code	Range	Code	Range	Code	Range	Code	Range	Code	Range
PD1	0-1 psid	ID10	0-10 inH ₂ Od	BD1	0-1 bard	MD40	0-40 mbard	AD2.5	0-2.5 kPad
PD3	0-3	ID20	0-20	BD1.6	0-1.6	MD60	0-60	AD6	0-6
PD5	0-5	ID30	0-30	BD2.5	0-2.5	MD100	0-100	AD10	0-10
PD10	0-10	ID50	0-50	BD4	0-4	MD160	0-160	AD25	0-25
PD20	0-20	ID100	0-100	BD6	0-6	MD250	0-250	AD40	0-40
PD50	0-50	ID150	0-150	BD7	0-7	MD400	0-400	AD100	0-100
PD100	0-100	ID200	0-200	BD11	0-11	MD600	0-600	AD250	0-250
PD200	0-200	ID400	0-400	BD55	0-55	MD1000	0-1000	AD700	0-700
PD6000	0-6000			BD400	0-400				

PRESSURE GAUGE OPTIONS

		Heavy-Duty Industrial Gauges				Process Gauges			Stainless Steel Case Industrial Gauges			Commercial Gauges		Low Pressure Capsule Gauges			Test Gauges
Part #	Description	PR25	PR35	PR40	PR60	PT45P	PT45T	PI45	PM	PG**C	PG**S	PD15/20/25	PD35/40	PC25N	PC25S	PC40/45/60	PL60/45
CASE FILL OPTIONS																	
-G	Glycerin Filled Case	✓	✓	✓	✓	✓	✓	N/A	✓	✓	✓	N/A	N/A	N/A	N/A	N/A	N/A
-W	Glycerin Water Filled Case (65/35)	✓	✓	✓	✓	✓	✓	N/A	✓	✓	✓	N/A	N/A	N/A	N/A	N/A	N/A
-S	Silicone Filled Case	✓	✓	✓	✓	✓	✓	N/A	✓	N/A	✓	N/A	N/A	N/A	N/A	N/A	N/A
-T	Teflon-coated Movement (No case fill)	✓	✓	✓	✓	✓	✓	✓	N/A	N/A	N/A	N/A	N/A	N/A	✓	✓	✓
-I	Inert Case Fill	✓	✓	✓	✓	✓	✓	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
LENS OPTIONS																	
-P	Plastic Lens	STD	✓	✓	✓	✓	✓	STD	STD	STD	✓	✓	MQ	✓	✓	✓	✓
-T	Tempered Safety Glass Lens	✓	STD	STD	STD	STD	STD	N/A	N/A	N/A	STD	N/A	N/A	N/A	STD	STD	STD
-S	Laminated Safety Glass Lens	✓	✓	✓	✓	✓	✓	N/A	N/A	N/A	✓	N/A	N/A	N/A	✓	✓	✓
-G	Plain Glass	N/A	N/A	N/A	N/A	N/A	N/A	N/A	MQ	MQ	N/A	MQ	STD	N/A	N/A	N/A	N/A
POINTER OPTIONS																	
-RP	Red Pointer	✓	✓	✓	✓	✓	✓	✓	N/A	N/A	✓	N/A	N/A	N/A	✓	✓	✓
-MP	Min/Max Pointer (Drag Hand)†	✓	N/A	✓	✓	✓	N/A	N/A	N/A	N/A	✓	N/A	N/A	N/A	N/A	N/A	N/A
-MQ	Min/Max Pointer (Tamper-proof)†	✓	N/A	✓	✓	✓	N/A	N/A	N/A	N/A	✓	N/A	N/A	N/A	N/A	N/A	N/A
-RH	Red Set Hand (Manual Adjustment)	N/A	N/A	N/A	N/A	✓	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
-EC	Electrical Contacts	N/A	N/A	✓	N/A	✓	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
DIAL OPTIONS																	
-CL	Custom Logo Dial	✓	✓	✓	✓	✓	✓	✓	MQ	MQ	✓	MQ	MQ	MQ	✓	✓	✓
-HV	Hi-Vis Dial	✓	✓	✓	✓	✓	✓	✓	N/A	N/A	✓	N/A	N/A	N/A	✓	✓	N/A
-CB	Color Band	✓	✓	✓	✓	✓	✓	✓	MQ	MQ	✓	MQ	MQ	MQ	✓	✓	N/A
-CP	Color Pie	✓	✓	✓	✓	✓	✓	✓	MQ	MQ	✓	MQ	MQ	MQ	✓	✓	N/A
-DM	Dial Marking	✓	✓	✓	✓	✓	✓	✓	MQ	MQ	✓	MQ	MQ	✓	✓	✓	✓
-LP	Removable Lens Protector	N/A	N/A	N/A	N/A	✓	✓	✓	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
CALIBRATION OPTIONS																	
-R1	Upgrade to 1% FS Accuracy	✓	✓	STD	STD	N/A	N/A	N/A	N/A	N/A	✓	N/A	N/A	N/A	N/A	N/A	N/A
-R2	Upgrade to 0.5% FS Accuracy	N/A	N/A	✓	✓	STD	STD	STD	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
-R5	Upgrade to 1.5% FS Accuracy	✓	✓	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	✓	✓	N/A
-C1	1pt. NIST Calibration Cert	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	N/A
-C3	3pt. NIST Calibration Cert	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	N/A
-C5	5pt. NIST Calibration Cert	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	N/A
-CX	10pt. NIST Calibration Cert	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	STD
-CS	Calibration Sticker (No logged pts.)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	N/A
TAG OPTION																	
-TS	Stainless Steel Tag (1-10 Characters)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
-TM	Stainless Steel Tag (11-80 characters)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
-TP	Paper Tag	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CERTIFICATION OPTIONS																	
-CM	General Material Conformance	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
-NC	Certificate of NACE Compliance	✓	✓	✓	✓	✓	✓	✓	N/A	N/A	N/A	N/A	N/A	N/A	✓	✓	✓
-PM	Positive Material Identification Certificate (PMI)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
-HT	Hydrostatic Test per ASME B31.3 (5 min)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
-LC	Argon Leak Check Certificate	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CLEANING OPTIONS																	
-DG	Degreased - Wiped Clean of Oils, Shipped in Sealed Bag	✓	✓	✓	✓	✓	✓	✓	N/A	N/A	✓	N/A	N/A	✓	✓	✓	✓
-OX	Cleaned for Oxygen Service per ASME B40.1	✓	✓	✓	✓	✓	✓	✓	MQ	MQ	✓	MQ	MQ	✓	✓	✓	✓
-OY	Cleaned for Oxygen Service per MIL-STD-1330D	✓	✓	✓	✓	✓	✓	✓	N/A	N/A	✓	N/A	N/A	✓	✓	✓	✓
OTHER OPTIONS																	
-NR	No Restrictor Screw	✓	✓	✓	✓	✓	✓	✓	N/A	N/A	N/A	N/A	N/A	N/A	N/A	✓	N/A
-FI	Dry Gauge Shipped with Fill Plug Installed	N/A	N/A	N/A	N/A	✓	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

✓ Indicates that the option is available with the model.

STD Indicates standard options with no additional cost.

N/A Indicates the option is not available with this model.

MQ Minimum order quantity applies.

†This option is only available with a plastic lens.