

POWERSCOUT™ 48 HD

NETWORKED MULTI-CIRCUIT METERING

REVENUE GRADE INSTRUMENTS FOR SUPERIOR ENERGY MEASUREMENT



48
channels



APPLICATIONS

- Data Centers
- Tenant Submetering
- Bi-Directional Metering
- Real-Time Power Monitoring in Commercial, Retail, and Industrial environments

FEATURES

- 48 channels: Multi-circuit submeter monitors voltage, current, power, energy, and many other electrical parameters on any combination of single and/or three-phase systems
- Two independent voltage inputs allow the PowerScout HD meter to be used on two systems simultaneously
- Line-Powered: 90-600V Phase-to-Phase Power Supply
- Revenue grade. ANSI C12.20-2010 Class 0.2
- Available with UL 94-V0 enclosure or as a circuit board on a mounting plate that helps facilitate easy, safe installation
- Safest installation ever: High-Voltage Cover offers additional level of protection
- The PowerScout HD comes standard with both BACnet and Modbus protocol, or DENTCloud enabled and Modbus.
- 2 digital pulse input ports. All models feature both serial and Ethernet.
- Floating Point: IEEE-754 data format allows for bidirectional monitoring and eliminates scaling factors
- Mix-and-match a full range of Split Core or RōCoil™ Rogowski-style CTs, including several revenue-grade options
- Display shows real-time information about the meter configuration and metered data
- PhaseChek™ confirms proper CT orientation
- UL Listed (enclosure version) or UL Recognized (plate and circuit board only version)
- CE Mark

MAXIMUM FLEXIBILITY FOR MONITORING

The PowerScout 48 HD is a versatile, multi-channel instrument. The flexible design allows it to be configured for monitoring multiple electrical circuits. It can be supplied with any of DENT's internally-shunted, 333 mV output split-core or RōCoil CTs. Monitor any combination of up to 16 three-phase or 48 single-phase electrical devices with a single PowerScout HD. With data updates every 1 second and ANSI C12.20-2010 Class 0.2 revenue grade accuracy (depending on CT), the PowerScout 48 HD is well-suited for data center monitoring, tenant submetering, and for accountability metering in commercial, retail, and industrial facilities.

INDUSTRY-STANDARD MODBUS OR BACNET

The PowerScout 48 HD supports both Modbus (based on SunSpec IEEE-754) and BACnet communications protocols. Communications interface can be accomplished through standard serial RS-485 or Ethernet. Optionally, it can be ordered DENTCloud enabled with Modbus. Additionally, the PowerScout 48 HD features two pulse inputs.

EASY INSTALLATION

Every PowerScout is line powered and designed to operate on any voltage from 90-600VAC. Unique to the PowerScout 48 HD are two independent voltage inputs, allowing for the monitoring of customer-derived voltage networks. Modbus & BACnet protocols are field-selectable and any combination of split-core or flexible RōCoil CTs can be used. Configure the meter prior to installation using the ViewPoint HD software utility and a direct USB connection or by using the built-in web server. Eliminate expensive trips back into the field: patented* PhaseChek™ ensures proper CT-to-phase installation the first time.

*U.S. Patent and Trademark Office Patent No. 7,612,552

POWERSCOUT™ 48 HD

KEY HARDWARE/SOFTWARE FEATURES

EASY DEPLOYMENT

Setting the PowerScout HD up for a new deployment has never been easier, thanks to two features:

Network Scan

Using ViewPoint HD Software, you can now quickly scan the local area network and find all the PowerScout HD meters installed on the network. The results page shows each meter's system description and even allows for some basic meter setup directly from the scan window. Use ViewPoint HD to give each meter a "friendly" name, such as "3rd Floor Utility Rm," to identify the right meter even faster.

Pre-Configuration

Maybe you have several meters that need to be configured the same way. Or, maybe you don't have the meter in your possession, but need to configure it ahead of time for an installer. It is now possible to build a meter configuration file without having a meter connected. This is especially helpful for teams who handle configuration and installation in two separate steps.

INTERVAL DATA RECORDING & RTC

The PowerScout HD Series features interval data recording of kWh. The meter's non-volatile memory stores up to 63 days of 15-minute kWh data that can be downloaded in the event of lost communication with the RTU. The CSV data file can be quickly downloaded through a direct USB or Ethernet connection using ViewPoint HD software and can be used to backfill any missing data. This feature works automatically in the background to record data - no configuration necessary.

In addition, the PowerScout HD Series has a capacitor-backed real-time clock (RTC) to ensure an accurate time stamp on all recorded data records. Unlike other systems, there is no battery to change and the capacitor retains calendar time for up to 1 week. The clock can be synchronized with the PC clock during meter setup.

DENTCloud ENABLED METERS

The PowerScout HD48 can be ordered enabled for use with DENTCloud. Without needing a Remote Terminal Unit (RTU), DENTCloud allows direct access to your meter's energy data from anywhere in the world, securely and in real-time. Communication requires connecting to the internet through a local network or cellular gateway. With DENTCloud, multiple team members can access a single meter or view multiple meters, regardless of location.



PULSE INPUTS


Correlate the consumption of a variety of systems using the standard dry contact pulse inputs. Configure each of the input channels independently with customizable units of measure (i.e., gallons) within ViewPoint HD Software. The PowerScout HD pulse inputs are compatible with "low speed" meters. PowerScout 48 HD meters (hardware revision I and later) are equipped with two pulse inputs.

ALARMS


The PowerScout HD power meter has the ability to set alarms on any meter channel. Alarms can be set through ViewPoint HD software to be triggered by under voltage events. The persistence setting is also adjustable within the software to allow start-up on transients.

POWERSCOUT™ 48 HD

ANATOMY

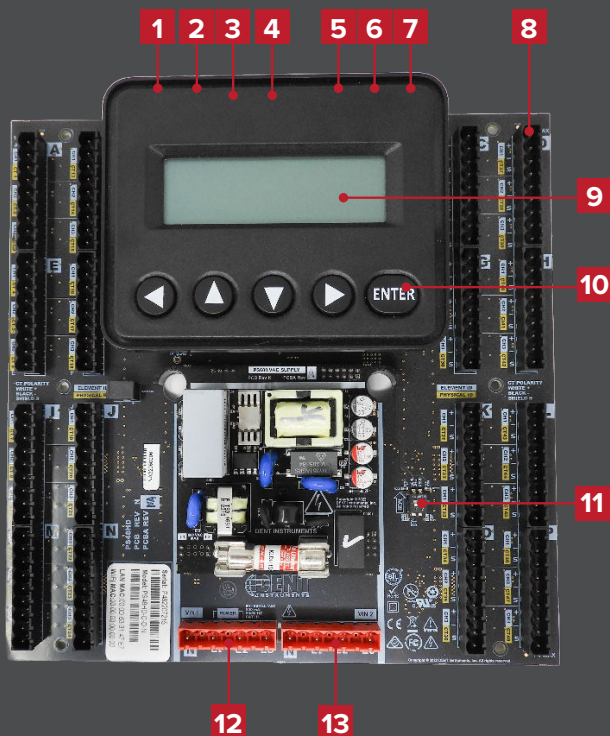

- | | |
|----------------------------|---------------------------------------|
| 1. Pulse Input 1 | 11. Seal Switch
(CW&M option only) |
| 2. Pulse Input 2 | 12. Voltage Input 1 |
| 3. Ethernet | 13. Voltage Input 2 |
| 4. USB | 14. Mounting Plate
(Optional) |
| 5. 12V Out (2W) | 15. High Voltage Cover
(IP30) |
| 6. RS-485 | 16. 1" EMT Conduit
Connection |
| 7. Alarm | 17. ABS Plastic
Enclosure |
| 8. CT Connections
(x48) | |
| 9. Display | |
| 10. Navigation Buttons | |

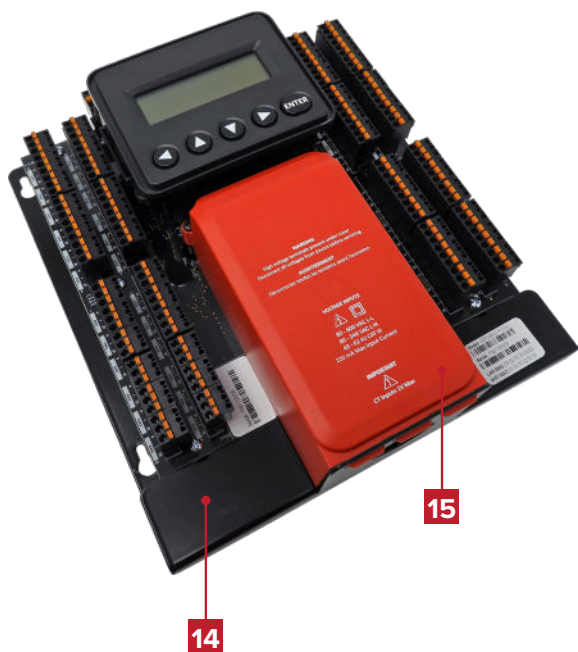

Detailed information about the PowerScout HD meter hardware and ViewPoint HD Software can be found in the Operator's Guide.

POWERSCOUT™ 48 HD SPECIFICATIONS

TECHNICAL

SERVICE TYPE	Single Phase, Split Phase, Three Phase-Four Wire (WYE), Three Phase-Three Wire (Delta)
POWER	From L1 Phase to L2 Phase. 90-600VAC RMS CAT III 50/60Hz, 500mA AC Max. Use of 12 volt auxiliary output requires 100 VAC minimum input voltage.
AC PROTECTION	0.5A Fuse 200kA interrupt capacity
POWER OUT	Unregulated 12VDC output, 200 mA, self-resetting fuse.
VOLTAGE CHANNELS	90-346 Volts AC Line-to-Neutral, 600V Line-to-Line, CAT III. Two voltage reference inputs.
CURRENT CHANNELS	48 channels, 0.525 VAC max, 333 mV CTs, 0-4,000 Amps depending on CT
MAXIMUM CURRENT INPUT	150% of current transducer rating (mV CTs) to maintain accuracy. Measure up to 4000A with RøCoil CTs
MEASUREMENT TYPE	True RMS using high-speed digital signal processing (DSP) with continuous sampling
LINE FREQUENCY	50/60 Hz (45-70 Hz measurable range). Measurement taken L1-N.
WAVEFORM SAMPLING	1.8 kHz
PARAMETER UPDATE RATE	1 second
MEASUREMENTS	Volts, Amps, kW, kVAR, kVA, aPF, dPF, kW demand, kVA demand, Import (Received) kWh, Export (Delivered) kWh, Net kWh, Import (Received) kVAh, Export (Delivered) kVAh, Net kVAh, Import (Received) kVARh, Export (Delivered) kVARh, Net kVARh, THD, Theta, Frequency. All parameters for each phase and element total
ACCURACY	0.2% ANSI C12.20-2010 Class 0.2
RESOLUTION	Values in IEEE-754 single precision floating point format (32 bit).
DISPLAY	4-line display, tri-color backlight (PhaseChek™)
ALARM OUTPUT	Under Voltage (open collector- 30V DC Max.)
PULSE INPUTS**	Two inputs. 3.3V sourcing voltage (current limited) to customer dry contact pulse output. Max pulse rate 10 Hz (50 mSec minimum transition time).

COMMUNICATIONS

HARDWARE	RS-485, Ethernet, and USB (for configuration only)
SUPPORTED PROTOCOLS	Modbus RTU, BACnet MS/TP, Modbus TCP or BACnet IP (standard) DENTCloud, Modbus RTU, or Modbus TCP (optional)
MAX COMMUNICATION LENGTH	1200 meters with Data Range of 100K bits/second or less
COMMUNICATION RATE (BAUD)	9600 (Default), 19200, 38400, 57600, 76800, 115200
DATA BITS	8
PARITY	None, Even, Odd
STOP BIT	2, 1
TERMINATION	None provided

MECHANICAL

WIRE CONNECTIONS	12-28 AWG 600 VAC, Voltage connection must be #14 AWG or larger & 600 VAC rated
MOUNTING	Panel Mount/Enclosure
HIGH VOLTAGE COVER	IP30. Available with PS48 Enclosure & Plate Models
OPERATING TEMPERATURE*	-20° to 60°C (-4° to 140°F)***
HUMIDITY	5% to 95% non-condensing
ENCLOSURE	ABS Plastic, 94-V0 flammability rating. Connections: 1" EMT conduit
ENCLOSURE DIMENSIONS	(L) 33.7cm x (W) 25.1cm x (H) 8.0 cm (13.3" x 9.8" x 3.1")
MOUNTING PLATE DIMENSIONS	(L) 26.2cm x (W) 24.1cm x (H) 8.0 cm (10.3" x 9.5" x 3.1")
PCBA DIMENSIONS	(L) 21.6cm x (W) 21.6cm x (H) 6.4 cm (8.5" x 8.5" x 2.5")

CERTIFICATIONS

UL RECOGNIZED (E186827)	Applies to mounting plate and circuit board only version Conforms to UL Std 61010-1 3rd Edition Certified to CSA Std C22.2 No. 61010-1 3rd Edition
UL LISTED (E186827)	Applies to indoor enclosure version Conforms to UL Std 61010-1 3rd Edition Certified to CSA Std C22.2 No. 61010-1 3rd Edition
CE	LVD (EN61010-1), EMC (EN61326-1), RoHS 2 (EN50581)
ANSI C12.20 CLASS 0.2	NIST Traceable Calibration

VIEWPOINT HD SOFTWARE

OPERATING SYSTEM	Windows® 11, Windows® 10, Windows® 8, Windows® 7
COMMUNICATIONS	USB & Ethernet standard. One USB Port required on PC.
SECURITY	2 levels of PIN protection (Read/Write or Read-Only)

ORDERING PART NUMBERS

PS48HD-C-D-N	POWERSCOUT 48 HD, WITH ENCLOSURE + DISPLAY
PS48HD-C-N-N	POWERSCOUT 48 HD, WITH ENCLOSURE, NO DISPLAY
PS48HD-P-D-N	POWERSCOUT 48 HD, MOUNTING PLATE + DISPLAY
PS48HD-P-N-N	POWERSCOUT 48 HD, MOUNTING PLATE, NO DISPLAY
PS48HD-C-D-N-C	POWERSCOUT 48 HD, WITH ENCLOSURE + DISPLAY, CW&M OPTION
PS48HD-P-D-N-C	POWERSCOUT 48 HD, MOUNTING PLATE + DISPLAY, CW&M OPTION
PS48HD-C-D-N-D	POWERSCOUT 48 HD, WITH ENCLOSURE + DISPLAY, DENTCLOUD ENABLED
PS48HD-P-D-N-D	POWERSCOUT 48 HD, MOUNTING PLATE + DISPLAY, DENTCLOUD ENABLED

*At -20°C, LCD display could be illegible. Meter voltage @ -20°C must exceed 100 VAC to power the meter.

**Pulse Inputs on PS48 meters Rev I or later.

***Colder temperatures require higher voltage to power the meter.

© DENT Instruments, Inc.
PowerScout™, ViewPoint HD™, PhaseChek™ and RøCoil™ are trademarks of DENT Instruments, Inc.
All specifications subject to change without notice. rev081723

DISTRIBUTOR:
PLACE CONTACT INFO HERE



1.888.610.7664

 www.calcert.com

sales@calcert.com