


Part No.

# QTHA-FRS0

5/16"-24 UNF x male Quick-test, no check-valve, S.S.

Connect a Quick-test hose directly to a DP transmitter or gauge valve using the bleeder port when the transmitter is not mounted on a 3 valve manifold or gauge valve or when the manifold is not easily accessible.

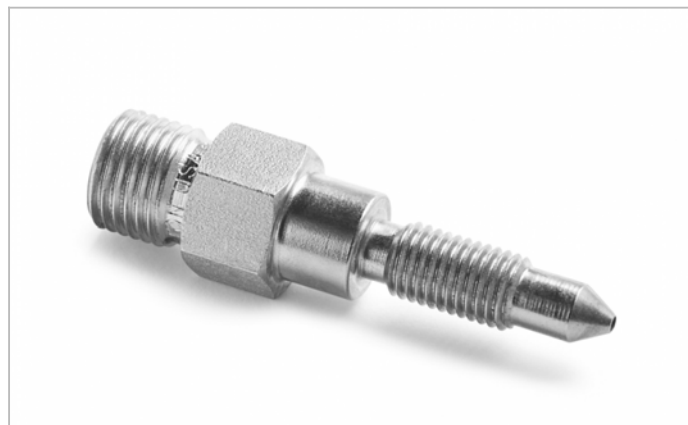

QTHA-FRS0

## Specs/Attributes

|                           |                                                                                                                                                                                                                                            |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Compatible with           | Rosemount 2051 Series DP Pressure Transmitters, Rosemount 3051 Series DP Pressure Transmitters, Yokogawa EJ series DP Pressure Transmitters, Anderson Greenwood M25 Block and Bleed Valves, Anderson Greenwood M251 Block and Bleed Valves |
| Country of origin         | USA                                                                                                                                                                                                                                        |
| Materials                 | Stainless Steel                                                                                                                                                                                                                            |
| Max Operating Temperature | 140 °F / 60 °C                                                                                                                                                                                                                             |
| Max Pressure              | 5000 PSI / 350 bar / 35 MPa                                                                                                                                                                                                                |
| Max Vacuum                | 0.00 InHg / 0.0 kPa                                                                                                                                                                                                                        |
| Media Compatibility       | Air, Inert Gas, Natural Gas, Petroleum Based Oil, Water                                                                                                                                                                                    |
| Min Operating Temperature | 0 °F / -18 °C                                                                                                                                                                                                                              |
| Seal Materials            | Buna-N                                                                                                                                                                                                                                     |
| Wrench Size               | 9/16 In<br>15 mm                                                                                                                                                                                                                           |
| Connector End 1           | 5/16-24 Male DP Transmitter/Gauge valve                                                                                                                                                                                                    |
| Connector End 2           | Male Quick-test                                                                                                                                                                                                                            |
| Dimensions                | H: 2.16 in (5.49 cm) x W: 0.56 in (1.42 cm)                                                                                                                                                                                                |