


Part No.

# QTHA-NPS0

*1/4"-20 UNC Male Bleed Port x male Quick-test adapter, S.S.*

Connect to a gauge valve in the field for calibration or testing

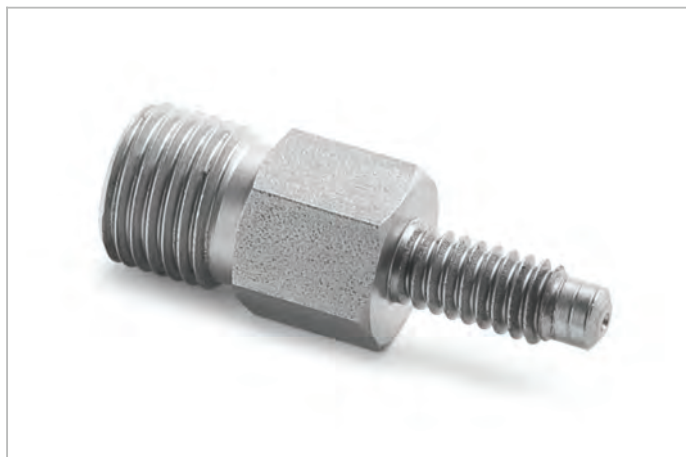

QTHA-NPS0

## Specs/Attributes

|                           |                                                                                                                                                                                                                                                                          |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Compatible with           | Noshok 600 Series Block and Bleed Valves, Noshok 700 Series Block and Bleed Valves, Noshok 2070 Series Block and Bleed Valves, Noshok 2170 Series Block and Bleed Valves, Parker PGI V-526 Series Block and Bleed Valves, Parker PGI V-527 Series Block and Bleed Valves |
| Country of origin         | USA                                                                                                                                                                                                                                                                      |
| Materials                 | Stainless Steel                                                                                                                                                                                                                                                          |
| Max Operating Temperature | 140 °F / 60 °C                                                                                                                                                                                                                                                           |
| Max Pressure              | 5000 PSI / 350 bar / 35 MPa                                                                                                                                                                                                                                              |
| Media Compatibility       | Air, Inert Gas, Natural Gas, Petroleum Based Oil, Water                                                                                                                                                                                                                  |
| Min Operating Temperature | 0 °F / -18 °C                                                                                                                                                                                                                                                            |
| Seal Materials            | Buna-N                                                                                                                                                                                                                                                                   |
| Wrench Size               | 9/16 In<br>15 mm                                                                                                                                                                                                                                                         |
| Connector End 1           | 1/4-20 Male DP Transmitter/Gauge valve                                                                                                                                                                                                                                   |
| Connector End 2           | Male Quick-test                                                                                                                                                                                                                                                          |