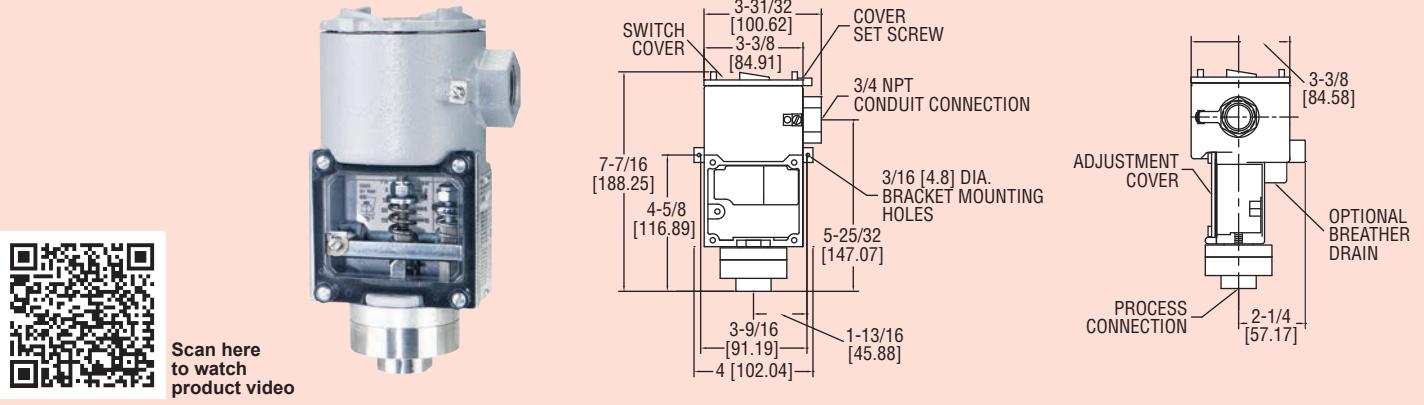


Series  
SA1100

# Diaphragm Operated Pressure Switches

## Visible Setpoint, Adjustable Deadband, Hermetically Sealed

### Snap Switch, Weatherproof and Explosion-proof

Scan here  
to watch  
product video

The Series SA1100 Diaphragm Operated Pressure Switches are weatherproof and explosion-proof in one economical enclosure. Extremely rugged construction assures excellent reliability in chemical, petroleum and industrial plants. New design also provides burst pressure protection to 3000 psi (206 bar). The rolling diaphragm design maintains a constant effective area to minimize friction. This results in a minimum deadband as low as 5% of full-scale. Since many applications require higher deadbands, the SA1100 includes a separate adjustment of this when necessary. A pump being used to control liquid level in a tank would be a typical situation where this feature would be important. Both setpoint and deadband adjustments are protected, yet clearly visible behind a clear polycarbonate window and are fully isolated from the electrical components for additional safety. A 7/16" open-end wrench is the only tool required to change settings. Terminal blocks are provided for switch wiring connections and both internal and external ground screws are included. Standard housing is weatherproof to NEMA standards 1 through 4X and 13; explosion-proof to NEMA 7, Class I, Groups B, C & D; NEMA 9, Class II, Groups E, F & G. Optional construction adds drain to meet NEMA 3R IP54.

**APPLICATIONS**

- Chemical, petroleum, food and drug processing industries
- Used indoor, outdoor or in explosion-proof area

**SPECIFICATIONS**

**Wetted Materials:** See pressure chamber and diaphragm material in model chart.

**\*Temperature Limits:** -30 to 180°F (-35 to 82°C) standard; ATEX compliant at Ambient Temperature: -4 to 167°F (-20 to 75°C); Process Temperature: -4 to 167°F (-20 to 75°C).

**Pressure Limit:** 1200 psig (82.6 bar).

**\*Enclosure Rating:** Weatherproof and Explosion-proof. Listed with UL and CSA for Class I, Groups B, C and D; Class II Groups E, F, and G. ATEX Compliant CEx0344Ex II 2 G EEx d IIC T6 Process Temperature 75°C. Weatherproof UL Rated Type 4. Meets NEMA 4X (IP66).

**Switch Type:** SPDT or DPDT snap switch.

**Electrical Rating:** See model chart.

**Electrical Connections:** Screw terminal.

**Conduit Connection:** 3/4" female NPT.

**Process Connection:** 1/2" female NPT.

**Mounting Orientation:** Within 20° of vertical.

**Set Point Adjustment:** Internal 7/16" hex nuts.

**Weight:** 3.5 lb (1.6 kg).

**Deadband:** See deadband chart.

**\*Agency Approvals:** ATEX, CE, CSA, UL.

**Switch Deadband Chart**

| Range<br>Number | Adjustable<br>Operating<br>Range |          | Approximate<br>Minimum Deadband |      | Approximate<br>Maximum<br>Deadband |     |
|-----------------|----------------------------------|----------|---------------------------------|------|------------------------------------|-----|
|                 | psig                             | bar      | psig                            | bar  | psig                               | bar |
| 11              | 10-150                           | 0.7-10   | 4.0                             | 0.28 | 7.5                                | 5.2 |
| 12              | 20-250                           | 1.4-17.2 | 5.0                             | 0.35 | 12.5                               | 8.6 |
| 13              | 30-500                           | 2.0-34   | 12                              | 0.83 | 45                                 | 3.1 |
|                 |                                  |          |                                 |      | 300                                | 21  |

**Series SA1100**

|                                    |      |    |   |   |   |   |   |  |  |
|------------------------------------|------|----|---|---|---|---|---|--|--|
| Example                            | SA11 | 13 | E | A | 4 | K | 2 |  | SA1113-E-A4-K2 Pressure Control; weatherproof, NEMA 4X, explosion proof NEMA 7&9; aluminum pressure chamber, Buna-N diaphragm and O-ring; 1/2 inch female NPT process connection; adjustable deadband, automatic reset; SPDT snap acting switch; adjustable range 30-500 psig. |
| Construction                       | SA11 |    |   |   |   |   |   |  | Series Designator, weatherproof NEMA 4X, explosion-proof NEMA 7, 9.  |
| Adjustable Pressure Ranges         | 11   |    |   |   |   |   |   |  | Adjustable range 10-150 psig (0.7-10 bar)  |
|                                    | 12   |    |   |   |   |   |   |  | Adjustable range 20-250 psig (1.4-17.2 bar)  |
|                                    | 13   |    |   |   |   |   |   |  | Adjustable range 30-500 psig (2.0-34.0 bar)  |
| Circuit (Switch) Options           |      | E  |   |   |   |   |   |  | Snap action switch rated 15A @ 125/250/480 VAC, 1/8 HP @ 125 VAC, 1/4 HP @ 250 VAC, 1/2 A @ 125 VDC resistive, 1/4 A @ 250 VDC resistive.  |
|                                    |      | HS |   |   |   |   |   |  | Hermetically sealed snap action switch rated 5A @ 125/250 VAC, 5A resistive @ 30 VDC*  |
|                                    |      | HG |   |   |   |   |   |  | Hermetically sealed snap action switch with gold contacts rated 1A @ 125 VAC, 1A resistive @ 30 VDC*   |
| Pressure Chamber Material (Wetted) |      |    | A |   |   |   |   |  | Aluminum<br>316 SS   |
| Diaphragm Material (Wetted)        |      |    | 4 |   |   |   |   |  | Buna-N diaphragm and O-ring<br>Fluorocarbon diaphragm and O-ring   |
| Circuit (Switch) Type              |      |    | 5 |   |   |   |   |  | SPDT   |
|                                    |      |    | K |   |   |   |   |  | DPDT (not available with HS or HG switch options)  |
| Process Connection                 |      |    |   | L |   |   |   |  | 1/2 inch female NPT  |
| *Options                           |      |    |   |   | 2 |   |   |  | AT ATEX certified construction<br>DRAIN Housing with drain - allows condensate to be drained from inside enclosure (meets NEMA 3R instead of 4X)   |

\*Options that do not have ATEX.

CONTACT US | T: 800.916.9700 | F: 800.916.9707 | E: [info@calcert.com](mailto:info@calcert.com) | C: 800.916.9700 | O: 800.916.9707