

M2 Signal Conditioner

Mains Powered - Volt, Current or Frequency Measurement





 **100-240 VAC** Mains Powered

programmable to measure
voltage, current or
frequency

VOLT
AMPS
FREQ


User-configurable
settings via the free,
easy-to-use software



True RMS


Less than 62mm deep



trumetercloud
READY

Remote monitoring
with APM Gateway and
Trumeter Cloud



2 Outputs
Digital (open collector) or
Analog (4-20mA)



DIN Rail Mount
Compact design for
simple installation



10 alarm set points

The M2 Signal Conditioner is a mains-powered unit (100–240 VAC) engineered for versatility and precision. It can be fully user-configured to measure voltage, current, or frequency, making it suitable for a wide range of industrial applications. Designed for DIN rail mounting, the M2 delivers reliable performance in environments where space and accuracy are critical.

The unit is designed for seamless integration with other control and monitoring equipment. It provides configurable digital and analog outputs, enabling flexible connectivity across multiple platforms. Each output is equipped with its own programmable delay, allowing precise control of output duration.


For extended functionality, the M2 Signal Conditioner can be paired with the APM Gateway to connect directly to Trumeter Cloud. This secure connection enables remote monitoring, automated data logging, and advanced online dashboards, giving engineers full visibility and analysis of system performance at any time, from any location.

Programmable

Simply connect to any USB port on your PC, launch the free configurator software, and start configuring.

- Scale (offset, gain and linear) and Range (min and max).
- 20 point non-linearization scaling for non-linear sensors.
- Ten independent alarm set-points.
- Configurable digital output delays (control the time output stays open/closed - .5 seconds – 120 seconds).

Dimensions

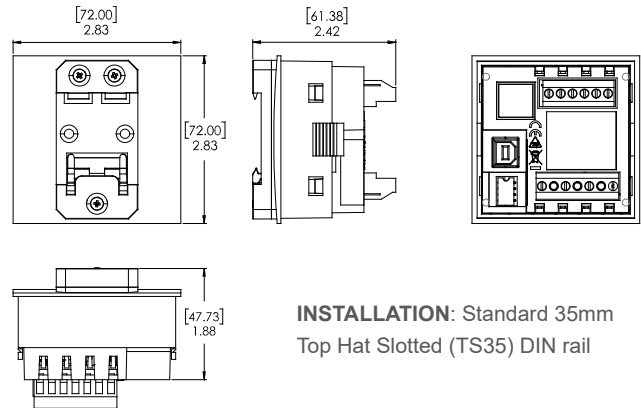

INSTALLATION: Standard 35mm Top Hat Slotted (TS35) DIN rail

Specification

INPUT	VOLT	AMP	FREQUENCY
Input Range (DC)	0 - 600V	0 - 5A	-
Input Range (AC)	0 - 600V	0 - 5A	2 - 400Hz
Accuracy	1%	1%	0.5%

ENVIRONMENTAL

Temperature - operating	-10 to +60°C
Temperature - storage	-40 to +70°C
IP rating	IP20

POWER SUPPLY

Nominal Input	100 - 240VAC
---------------	--------------

OUTPUTS

Max voltage	34V
Max current	500mA
Analogue output	4-20mA

CERTIFICATION

UL, cUL, CE



Part Numbers

SC-M2-DIN	M2 Signal Conditioner, DIN Rail Mount
022128-01	USB Cable

We can **customize our Signal Conditioners** to match your requirements, adding extra **functionality** or **communication protocols** to suit your needs. If you can't find what you're looking for, **ask about our custom solutions!**

