

PosiTector® SHD Verifier

Shore Hardness Durometer Accuracy Verification Kit

Ideal for checking the accuracy and operation of Shore hardness durometers and an important component in fulfilling both ISO and in-house quality control requirements.

Features include...

- High precision load cell and handheld smart sensor indicator verifies PosiTector SHD Shore A and Shore D durometers
- Ready to use with all PosiTector Shore Hardness Durometers
- Precise load control with micrometer adjustable stage
- Ideal for laboratory use
- Fitted with replaceable Shore A or Shore D Targets to protect probe tips
- Portable — requires no external power source
- Comes with a Sample Certificate of Accuracy
- Certificates of Calibration showing traceability to NIST included for both the load cell and smart sensor indicator
- One year warranty
- Made in USA

The PosiTector SHD Verifier and the included documents allow the user to certify the accuracy of PosiTector SHD Shore Hardness Durometers in-house.


Sample Certificate of Accuracy																																		
Company Name: _____	Date Testing Performed: _____																																	
Address: _____																																		
Customer Name: _____																																		
Address: _____																																		
Product Description: <u>PosiTector SHD Shore Hardness Durometer</u>																																		
Model number: _____																																		
Serial number: _____																																		
Laboratory Temperature: _____ °F / _____ °C																																		
Measurement conducted in accordance with procedure number: _____																																		
Standard Measurement System Uncertainty: <u>± 0.004 lbs</u>																																		
<table border="1"> <thead> <tr> <th colspan="11">Spring Load in Durometer Units</th> </tr> <tr> <th>Standard</th> <th>10</th> <th>20</th> <th>30</th> <th>40</th> <th>50</th> <th>60</th> <th>70</th> <th>80</th> <th>90</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>Gage</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Spring Load in Durometer Units											Standard	10	20	30	40	50	60	70	80	90	100	Gage										
Spring Load in Durometer Units																																		
Standard	10	20	30	40	50	60	70	80	90	100																								
Gage																																		
Measurement Performed By: _____																																		
Title: _____																																		
Measurement was performed using test equipment traceable to NIST. This calibration certificate shall not be reproduced except in full, without written permission from the calibration provider.																																		

Page 3 of 6



Range	0 - 10 lbs
Resolution	.001 lbs
Accuracy	± 0.004 lbs (± 17.8 mN) (± 0.04 Shore D) (± 0.238 Shore A)

Note: Verifier displays Imperial units only.

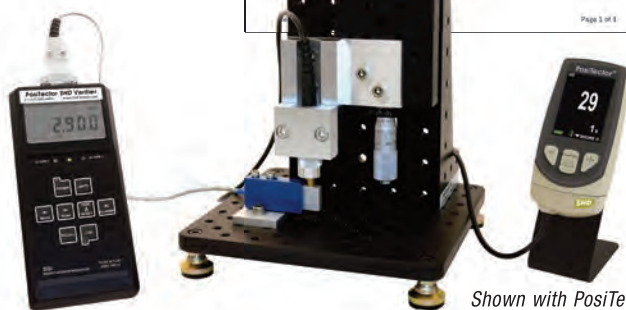

Shown with PosiTector SHD (not included)

DEVICE COMES COMPLETE with load cell, smart sensor indicator, built-in rechargeable Lithium Ion batteries with universal AC adaptor, replaceable Shore A (aluminum) and Shore D (brass) targets, allen wrench, instructions, Sample Certificate of Accuracy, hard shell carrying case, two Certificates of Calibration traceable to NIST, one (1) year warranty.



EASY OPERATION

1. Insert the appropriate Target (Shore A or Shore D) into the load cell.
2. Connect the Shore Hardness Probe to the PosiTector SHD Verifier's Loading Fixture using the supplied Allen wrench.
3. Apply pressure using the micrometer adjustable stage.
4. Compare values from the durometer and the Verifier.

CASE SIZE: 38.1 x 30.5 x 25.4 cm
(15" x 12" x 10")

SHIPPING WEIGHT: 7.38 kg (16.3 lbs.)

DeFelsko®
The Measure of Quality


Made in U.S.A.