



### Description & Features:

- Widely specified in the industrial and commercial plumbing trade
- Includes a separable brass or lead free brass thermowell
- Can also be used with TIW/TIW-LF or TDF thermowells
- 3.5" (90mm) and 6" (150mm) stem
- Available in aluminum or Valox® (9") case
- Organic filled tube (magnifying)
- Dual scale (°F & °C)
- Adjustable angle connection and 360° case rotation for easy installation
- Graphite filled bulb chamber for maximum heat conduction
- ASME B40.200 and ASTM E2511 compliant
- CAN/CGSB-14.4-M88 compliant
- ±1% accuracy
- 5 year warranty

### Applications:

- New construction, plumbing, water lines, boilers, heating, ventilation and air conditioning
- Lead free version for potable water systems



Note: RoHS applies only to 304 SS and 316 SS thermowells

### Specifications

Scale	9" (230mm) aluminum or Valox® case, impact resistant
Lens	Glass
Connection	3/4" NPT with thermowell 1 1/4" - 18 UNF swivel nut (no thermowell)
Scales	Aluminum, painted white with black markings
Bulb Chamber	Tapered cast aluminum with graphite fill
Tube and Sensing Liquid	Glass (magnifying), organic green fluid (other colours optional)
Adjustment	Fully adjustable
Thermowell	TIM: 3/4" Brass, separable socket (SS optional) TIM-LF: 3/4" Lead free brass, separable socket
Accuracy	±1%
Enclosure Rating	IP54

Note: For an Industrial Thermowell, please refer to the Industrial Thermowell product page

### TIM Order Codes (products in bold are normally stock in North America)

Stem	Aluminum Case		Valox® Case	
	3.5" (90mm)	6" (150mm)	3.5" (90mm)	6" (150mm)
-40°F to 110°F & -40°C to 40°C	<b>TIM101A</b>	TIM101-6A	<b>TIM101</b>	TIM101-6
0°F to 120°F & -15°C to 50°C	<b>TIM102A</b>	<b>TIM102-6A</b>	<b>TIM102</b>	<b>TIM102-6</b>
0°F to 160°F & -15°C to 70°C	<b>TIM103A</b>	TIM103-6A	<b>TIM103</b>	TIM103-6
30°F to 180°F & 0°C to 80°C	<b>TIM104A</b>	TIM104-6A	<b>TIM104</b>	TIM104-6
30°F to 240°F & 0°C to 115°C	<b>TIM100A</b>	<b>TIM100-6A</b>	<b>TIM100</b>	<b>TIM100-6</b>
30°F to 300°F & 0°C to 150°C	<b>TIM105A</b>	<b>TIM105-6A</b>	<b>TIM105</b>	TIM105-6

Other ranges and connection sizes available upon request. Duct flange available upon request. Union connection available upon request.

### Option suffix:

B = Blue fill fluid

R = Red fill fluid

Valox® is a registered trademark of the General Electric Company

## TIM-LF Order Codes (products in bold are normally stock in North America)

Stem	Aluminum Case		Valox® Case	
	3.5" (90mm)	6" (150mm)	3.5" (90mm)	6" (150mm)
-40°F to 110°F & -40°C to 40°C	<b>TIM101ALF</b>	TIM101-6ALF	<b>TIM101LF</b>	TIM101-6LF
0°F to 120°F & -15°C to 50°C	<b>TIM102ALF</b>	<b>TIM102-6ALF</b>	<b>TIM102LF</b>	<b>TIM102-6LF</b>
0°F to 160°F & -15°C to 70°C	<b>TIM103ALF</b>	TIM103-6ALF	<b>TIM103LF</b>	TIM103-6LF
30°F to 180°F & 0°C to 80°C	<b>TIM104ALF</b>	TIM104-6ALF	<b>TIM104LF</b>	TIM104-6LF
30°F to 240°F & 0°C to 115°C	<b>TIM100ALF</b>	<b>TIM100-6ALF</b>	<b>TIM100LF</b>	<b>TIM100-6LF</b>
30°F to 300°F & 0°C to 150°C	<b>TIM105ALF</b>	<b>TIM105-6ALF</b>	<b>TIM105LF</b>	TIM105-6LF

Other ranges available upon request.

### Option suffix:

B = Blue fill fluid


R = Red fill fluid

Valox® is a registered trademark of the General Electric Company

## TIW-LF Thermowell Order Codes (products in bold are normally stock in North America)

Stem Length	Overall Length	Material	Insertion Length	3/4" NPT Connection
<b>3.5" Without Lagging</b>	4.25" (108mm)	Lead Free Brass	2.5" (63mm)	<b>TIW01LF</b>
<b>6" Without Lagging</b>	6.75" (172mm)	Lead Free Brass	5" (127mm)	<b>TIW04LF</b>

### 3.5" Stem

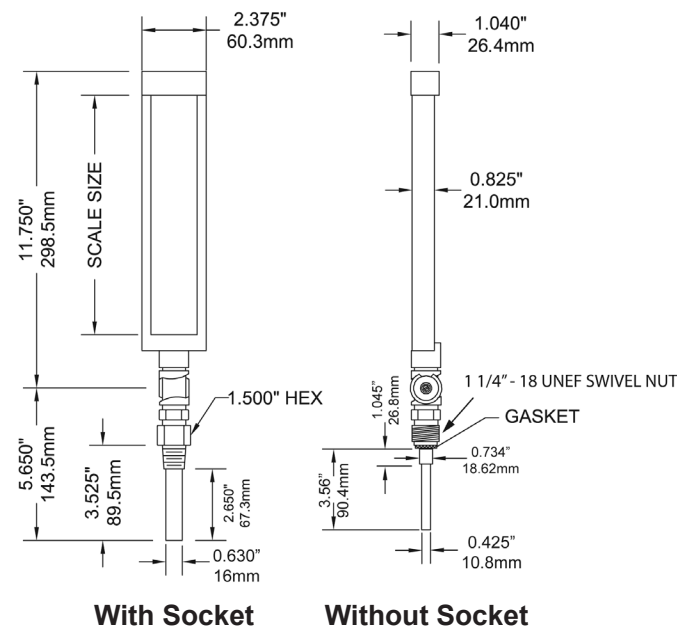

### 6" Stem

