


TM Series

Electromechanical Timer Modules for OEM Applications

24-Hour, 7-Day

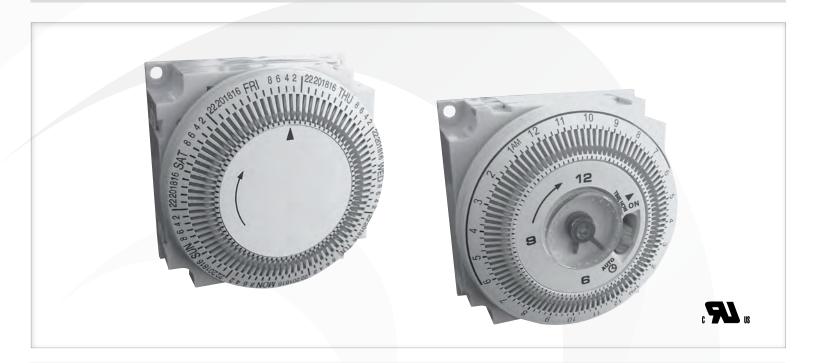

Features

The TM series of OEM time switches are designed for control of heating, ventilating, air conditioning, refrigeration, lighting, security, circulating pumps, spas or any electrical load requiring 24-hour or 7-day scheduling. The small and contemporary design, in conjunction with the broad range of controls with identical dimensions, provides flexibility and interchangeability for any time switch requirement.

Ordering Data TM Series Specify Input Voltage	Operating Features						
	Switch Program	Reserve	Program On/Off Every	Shortest Switching Time	Switch		Manual
					Туре	Rating	Override
TM1S/3*	24 hr.	No	15 min.	15 min.	SPDT	15A res.	on/off/auto
TM1Q/3*	24 hr.	36 hr.	15 min.	15 min.	SPDT	20A res.	on/off/auto
TM18Q	24 hr.	36 hr.	15 min.	15 min.	SPDT	20A res.	No

S=Synchronous Drive; Q=Quartz Drive; *Units with Authentic Clock Face





Technical Specification:

Supply Voltage: 24, 120, 240VAC

SPDT Switch Rating:

> Resistive: 15A or 20A

1250W or 1500W Tungsten:

HP@125VAC: 1/2 or 1 HP

Power Consumption: 1VA

Installation: **Surface Mounting**

Flush Mounting with

Stand-offs


-4°F to 128°F **Ambient Temperature Range:**

Trippers: Captive Terminals: 1/4" Spade

Weight: Approximately 3 oz. Certification CE, UL & cUL listed


Dimensions

□2.36 (□60) □2.12 (□54)



Wiring Diagram

Contacts shown in "Off" position (trippers pushed inward) "On" position (trippers pushed outward) will close contacts 3 & 4



Part Numbers

TM18Q/120VAC/50-60HZ TM1S/3/120VAC/60HZ

Elemech TMR W/ Quartz Drive, 36 HR B/BU Elemech TMR W/ Sync Drive, 120VAC, 60HZ



