UltraFlo® 5000 SERIES Ultrasonic Flow Meter



- **⊘** Measures Dosing | Pulsating Flow
- **⊘** No Moving Parts
- Ultra Low Flow Applications




Product Description

The **UltraFlo® 5000** Flow Meter utilizes ultrasonic technology to measure both conductive and non conductive liquids, and is an excellent choice for very corrosive liquids such as strong acids and alkalies.

The UltraFlo® 5000 has no moving parts and can measure pulsating, dosing and metering flow applications. All parts that contact the liquid are made of corrosion resistant Polysulfone.

The UltraFlo® 5000 is characterized by its high measurement accuracy, repeatability and guaranteed long-life performance.

Working Principle

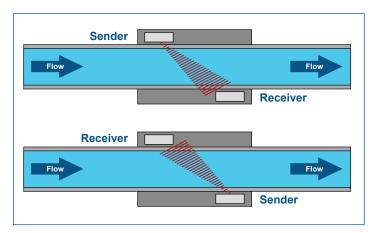



Features


- **⊘** All Plastic PE Wetted Materials
- M12 Quick Disconnect
- **Output** Superior Corrosion Resistance
- **⊘** Negligible Pressure Drop
- Empty Pipe Alarm
- Air Bubble Detection

Blind Display Option

- Output to a PLC or a **Remote Display**
- **Pulse Relay Output**
- **⊘** NEMA 4X



Sound Wave Technology

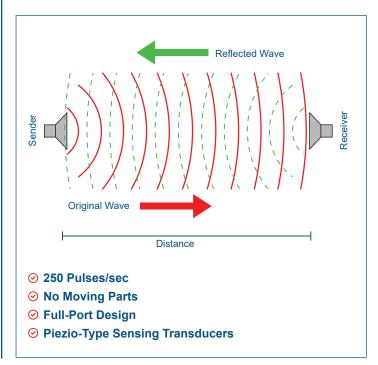




Technical Specifications

PE		
PE		
	PE	
IP67 NEMA 4X		
14 -176°F -10°- 80°C		
0.005 - 0.8 0.2 - 3.0	0.02 - 1.6 0.09 - 6	0.08 - 6.3 0.3 - 24
100 psi 7 bar	100 psi 7 bar	100 psi 7bar
168 147 50	168 147 50	171 147 50
1.4	1.4	1.6
2.4	2.4	2.6
1/2"	3/4"	1"
24VDC 3.6W		
M12		
4-20mA + Pulse Relay RS-485		
Simultaneous display of volume flow, quantity, bar graph, lighted		
	14 -176°F -10°- 80°C 0.005 - 0.8 0.2 - 3.0 100 psi 7 bar 168 147 50 1.4 2.4 ½" 24VDC 3.6W M12 4-20mA + Pulse Relay RS	14 -176°F -10°- 80°C 0.005 - 0.8 0.2 - 3.0 100 psi 7 bar 168 147 50 1.4 2.4 1/2" 24VDC 3.6W M12 4-20mA + Pulse Relay RS-485

Measuring Points

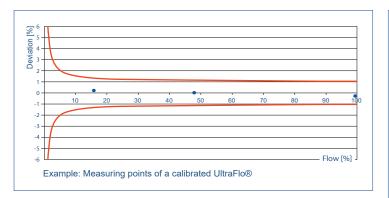

Model Selection

Size	Part Number	Material
1/2"	UFM-5000-50	PE
3/4"	UFM-5000-75	PE
1"	UFM-5000-100	PE

Application Example

