


UNI-T[®]

Instruments.uni-trend.com

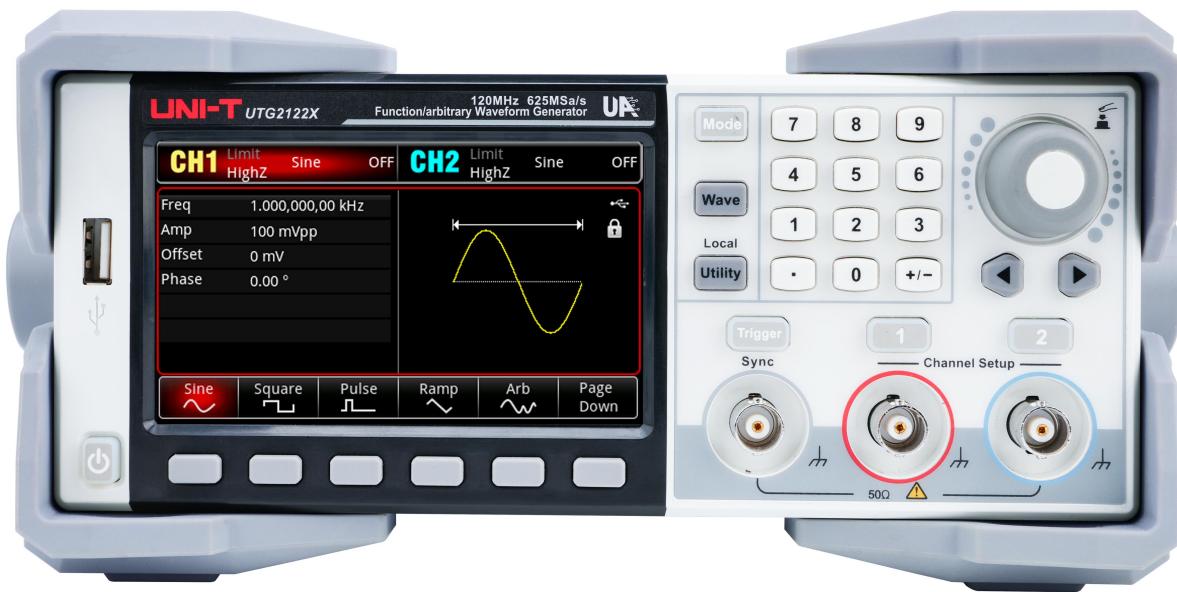

Data Sheet

UTG2000X Series Function/Arbitrary Waveform Generator

V1.0


2024.3

Product Features

- Dual channel with the maximum frequency output 120 MHz, the maximum output amplitude 20 Vpp
- 625 MSa/s sample rate and 16-bit vertical resolution
- Multiple analog and digital modulation function: AM, PM, FM, DSB-AM, ASK, PSK, BPSK, QPSK, FSK, 3FSK, 4FSK, QAM, OSK, PWM, SUM
- Square wave with the maximum frequency 50 MHz, low jitter
- Wide dynamic and high-precision pulse wave with adjustable edge time, which can achieve fine edge time adjustment and has extremely high adjustment resolution and range
- Excellent performance with low harmonic distortion
- Supports sweep frequency and burst output
- Low jitter waveform can be outputted point by point within the range of arbitrary waveform length from 8 pts to 64 Mpts
- Supports channel copying, following, and stacking settings
- Can generate arbitrary waveform through arbitrary waveform editor on the upper computer
- 7-bit hard frequency counter
- Built-in 200 arbitrary waves
- Standard USB Host, USB Device, and LAN interface
- Support SCPI (programmable instrument standard commands)
- 4.3 inch TFT LCD capacitive touch display screen


Design Features

Equivalent performance of double channel output

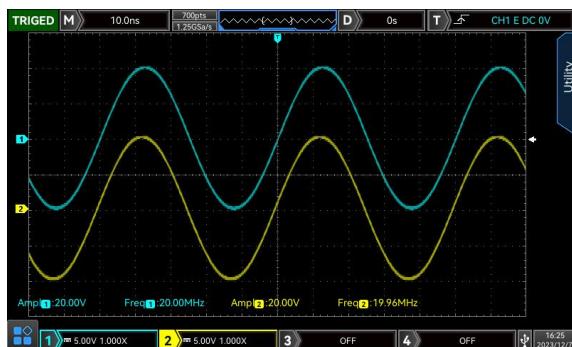

Large output under the high frequency: double channel with full amplitude output of 20 Vpp can be output under the frequency of 20 MHz.

Low Jitter

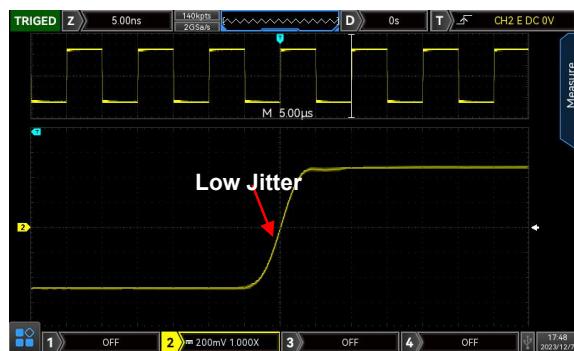


The excellent digital sampling technology makes the output waveform jitter much lower.

Low Distortion Output




Outstanding harmonic distortion

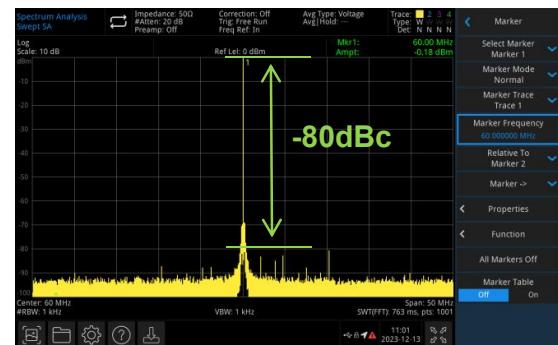


-80dBc spurious free dynamic range

High SNR

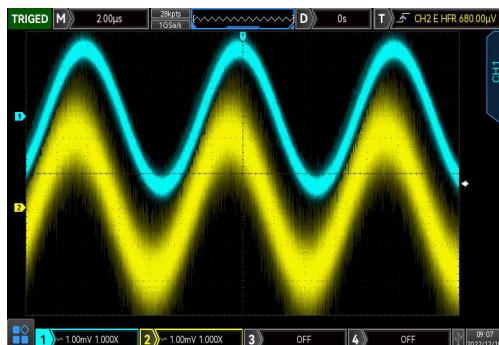


A small signal superimposed with a large DC results in a lower output noise and a higher SNR.

Burst

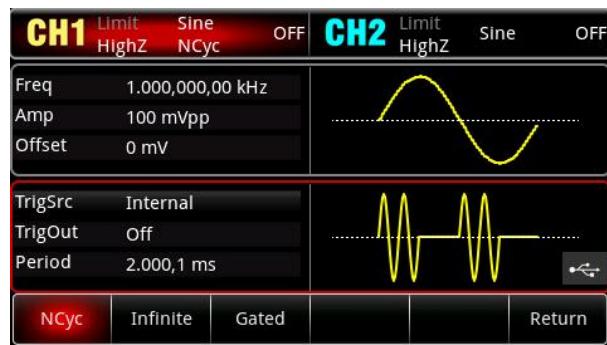


Three types of bursts: "N cycle", "Infinite" and "Gate". Three trigger sources: "Internal", "External" and "Manual".

Pulse Wave and Edge Time

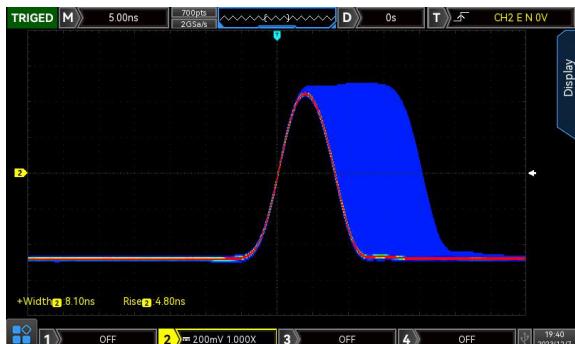

The new generation of wide dynamic high precision edge time adjustable pulse wave has a minimum pulse width of 8 ns. The pulse width can be fine adjusted and the minimum step is 100 ps. In addition, it can produce higher harmonic component, which has the feature of a dedicated pulse generator. The edge time can be set to a minimum of 5 ns independently.

Sweep Frequency

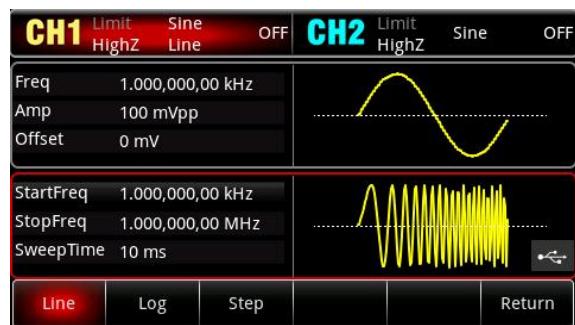


Three sweep frequency modes: "Line", "Log" and "Step". Three trigger sources: "Internal", "External" and "Manual".

Channel Merge



Channel merging can be realized with SUM or channel stacking functions, generating signals with adjustable signal-to-noise ratios and dual-tone multi-frequency signals. Up to four signals can be summed and coupled on two channels, and SUM enables the output of two-tone or multi-tone signals.

Multiple Modulation Function

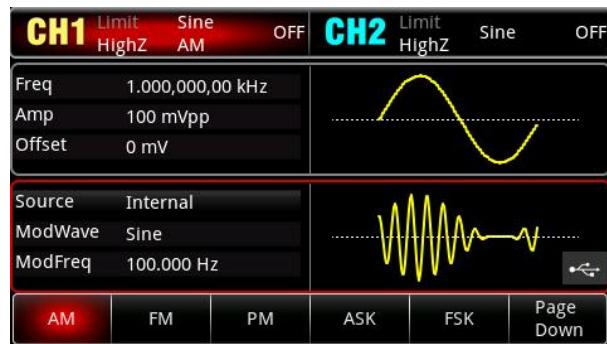

Modulation output (15 types): AM, FM, PM, DSB-AM, ASK, FSK, PSK, 3FSK, 4FSK, BPSK, QPSK, OSK, SUM, QAM and PWM.

Frequency Counter



The high precision hardware frequency counter can measure the frequency range of 100 mHz~200 MHz.




Channel Tracking




Channel tracking simplifies the operation of dual channels. The phase, amplitude and frequency of both channels can be controlled by a single parameter, making it easy to create deviation or tracking signals.

Arbitrary Waveform Editor

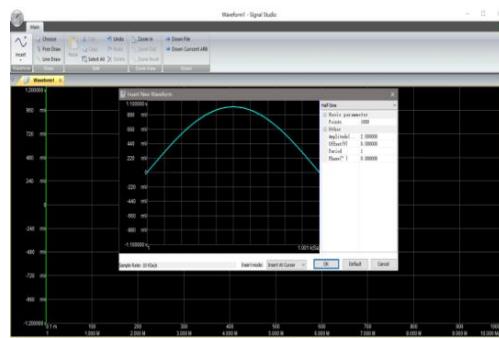

The arbitrary waveform editor has diversified generating method. The arbitrary waveform can be generated by insert the standard waveform or freely drawing.

Remote Control

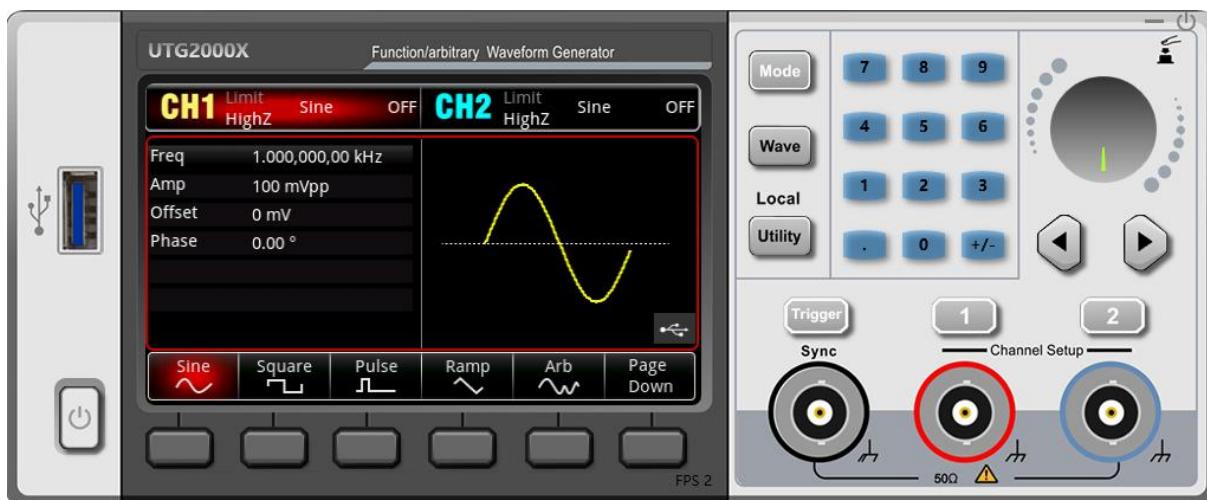

The instrument can connect to the computer via USB and LAN port and it supports remote control.

The user can use the control software for remote operation and control, and realize automatic testing and remote monitoring.

4.3 inch Capacitive Touch Screen



4.3-inch high-definition display, touch operation, so that the instrument control faster and more convenient.

Definition and Condition

- "Technical Index" provide a detailed description of the performance of the parameters which involved in the product warranty. Unless otherwise specified, these specifications are applicable to the temperature range from 18 °C to 28 °C.
- "Typical Value" refers to other product performance information which not covered in the product warranty. When the performance exceeds the technical index, 80% of the units can exhibit 95% confidence in the temperature range of 18 °C to 28 °C. Typical performance does not include uncertainty of measurement.
- "Nominal Value" means the expected performance or describes the performance of the product that is useful in the application of the product but is not included in the scope of the product warranty.
- Under the following conditions, it can achieve its technical indicators:
In the calibration cycle and has been warmed up for at least 30 minutes. If the device is stored in an environment that is within the allowable storage temperature range but exceed the allowable operating temperature range, the instrument must be placed within the allowable operating temperature range for at least two hours

Basic Waveform Characteristics

All analog channel output related specifications is suitable for channel 1 and channel 2

Basic characteristics		
Model	UTG2062X	UTG2082X
Channel	Dual channel	
Sampling rate	625 MSa/s (1.25 GSa/s, 2 x interpolation)	
Vertical resolution	16-bit	
Working modes	Continuous, Modulation, Frequency sweep, Burst, Counter	
Wave	Sine, Square, Ramp, Pulse, Noise, DC, Arb, Harmonic, PRBS, Expression	
Modulation	AM, FM, PM, DSB-AM, ASK, FSK, PSK, 3FSK, 4FSK, BPSK, QPSK, OSK, SUM, QAM, PWM	
Frequency sweep	Lin, Log, Step	
Burst	N-cycle, Gated, Infinite	
Counter	100 mHz ~ 200 MHz, 7 digits	
LCD	4.3 inch TFT LCD capacitive touch display screen, WVGA (480×272)	

Frequency characteristic

Sine wave	1 μHz ~ 60 MHz	1 μHz ~ 80 MHz	1 μHz ~ 120 MHz
Square wave	1 μHz ~ 30 MHz	1 μHz ~ 40 MHz	1 μHz ~ 50 MHz
pulse wave	1 μHz ~ 30 MHz	1 μHz ~ 40 MHz	1 μHz ~ 50 MHz
Ramp wave	1 μHz ~ 3 MHz	1 μHz ~ 4 MHz	1 μHz ~ 5 MHz
Arbitrary wave	1 μHz ~ 30 MHz	1 μHz ~ 40 MHz	1 μHz ~ 50 MHz
Harmonic	1 μHz ~ 30 MHz	1 μHz ~ 40 MHz	1 μHz ~ 50 MHz
Expression	1 μHz ~ 15 MHz	1 μHz ~ 20 MHz	1 μHz ~ 25 MHz
PRBS	1 μbps ~ 30 Mbps	1 μbps ~ 40 Mbps	1 μbps ~ 50 Mbps
Gauss noise	1 MHz ~ 60 MHz	1 MHz ~ 80 MHz	1 MHz ~ 120 MHz
Resolution	1 μHz		
Reference frequency	Frequency:10.0000 MHz		
	Initial accuracy:±0.5 ppm, 25°C		
	Temperature stability:±0.5 ppm, 0°C ~ 40°C		
	Annual aging rate:±1 ppm, First year aging rate		

Sine wave

Frequency	1 μHz ~ 60 MHz	1 μHz ~ 80 MHz	1 μHz ~ 120 MHz
		DC ~ 1 MHz: -70dBc	
		1 MHz ~ 10 MHz: -65dBc	
Harmonic distortion	Typical value (0dBm)	10 MHz ~ 40 MHz: -60dBc	
		40 MHz ~ 80 MHz: -55dBc	
		80 MHz ~ 120 MHz: -50dBc	
THD	< 0.07% (DC ~ 20 kHz, 1 Vpp)		
Spurious signal (anharmonic)	Typical value (0 dBm)	≤10 MHz ,< -70 dBc	
		>10 MHz ,<-70 dBc+6 dB/octave	
Phase noise(typical)	10 MHz: ≤-125 dBc/Hz (typical, 0 dBm, 10 kHz deviation)		

Square wave

Frequency	1 μHz ~ 30 MHz	1 μHz ~ 40 MHz	1 μHz ~ 50 MHz
Rise/fall time (1 Vpp, 50 Ω)	<7ns (typical, 1 kHz)	<6ns (typical, 1 kHz)	<5ns (typical, 1 kHz)
Overshoot (100kHz, 1 Vpp, 50 Ω) < 2% (typical, 50 Ω)			
Duty ratio	0.001% ~ 99.999% (limited by current frequency)		
Symmetry (duty ratio=50%) 1% of period + 4 ns			
Jitter(RMS) (1 Vpp ,	Typical (1 MHz,	≤ 5 MHz:2ppm + 200ps	

50 Ω)	1 Vpp, 50 Ω)	> 5 MHz:200ps
Ramp wave		
Frequency	1 μHz ~ 3 MHz	1 μHz ~ 4 MHz
Non-linearity	< 1% of peak output (typical value, 1 kHz, 1 Vpp, symmetry 100%)	
Symmetry	0.0% ~ 100.0%	
Pulse wave		
Frequency	1 μHz ~ 30 MHz	1 μHz ~ 40 MHz
Minimum pulse width	8ns	
Variable edge	7ns ~ 10s	6ns ~ 10s
Duty ratio	0.001% ~ 99.999% (limited by current frequency)	
Overshoot	< 2% (typical, 1 Vpp 50 Ω)	
Jitter	150 ps	
Arbitrary wave		
Frequency (DDS)	1 μHz ~ 30 MHz	1 μHz ~ 40 MHz
	DDS	
Wave length	Point by point	
	8 pts ~ 32 Mpts (Up to 64 Mpts for single channel output)	
Vertical resolution	16-bit (symbol included)	
Sampling rage	DDS	625 MSa/s (DDS)
	Point by point	
Sampling rage	1 μSa/s ~ 312.5 MSa/s	
Minimum rise/fall time	<5ns (typical, 1 Vpp, 50 Ω)	
Jitter (playback mode)	150ps	
Nonvolatile storage	200 waves	
PRBS		
bit rate	1 μbps ~ 30 Mbps	1 μbps ~ 40 Mbps
Edge time	7ns ~ 1000s	6ns ~ 1000s
Symbol	PN3, PN5, PN7, PN9, PN11, PN13, PN15, PN17, PN19, PN21, PN23, PN25, PN27, PN29, PN31	
Expression properties		
Frequency	1 μHz ~ 15 MHz	1 μHz ~ 20 MHz
Function	Sin, cos, tan, sinc, abs, ln, sqrt, acos, asin, atan, sinh, tanh, ceil, exp, fabs, floor, lg, cosh	
Operation	+, -, *, /, ^	
Variable value	°, rad	

Harmonic

Frequency	1 μHz ~ 30 MHz	1 μHz ~ 40 MHz	1 μHz ~ 50 MHz
Harmonic order	2 ~ 16		
Type	Odd, Even, All, User Defined		
Amplitude	1mV ~ 10 Vpp (50 Ω)		
	Set the amplitude based on the selected harmonic sequence number		
Phase	-360° ~ 360°		
	Set the phase based on the selected harmonic sequence number		

Output Characteristic**Output**

Amplitude (50 Ω)	≤20 MHz:1 mVpp ~ 10 Vpp
	≤60 MHz:1 mVpp ~ 5 Vpp
	≤120 MHz:1 mVpp ~ 2 Vpp
Amplitude (High resistance)	≤20 MHz:2 mVpp ~ 20 Vpp
	≤60 MHz:2 mVpp ~ 10 Vpp
	≤120 MHz:2 mVpp ~ 4 Vpp
Accuracy	Typical value(1kHz, sine wave, 0V, deviation, > 10 mVpp) ± (1% of set value+1 mVpp)
Amplitude flatness	Typical value (1kHz, sine wave, 1 Vpp) ≤60 MHz:±0.2dB ≤80 MHz:±0.4dB ≤120 MHz:±0.6dB

DC offset

Range(peak AC+DC)	±5 V (50 Ω)
	±10 V (High resistance)
Accuracy of offset	Offset set value ±1% ± amplitude set value 0.5%±2mV

Waveform output

Impedance	50 Ω typical value
Protection	Overvoltage protection, overload automatically disabling waveform output

Modulation Types

Model	UTG2062X	UTG2082X	UTG2122X
AM			
Carrier wave	Sine wave, square wave, ramp wave, arbitrary wave, pulse wave		
Source	Internal/External		
Modulation wave	Sine wave, square wave, ramp wave, noise, arbitrary wave		
Modulation depth	0% ~ 120%		
Modulation frequency	2 mHz ~ 1 MHz (The modulation source is internal)		
FM			
Carrier wave	Sine wave, square wave, ramp wave, arbitrary wave, pulse wave		
Source	Internal/External		
Modulation wave	Sine wave, square wave, ramp wave, noise, arbitrary wave		
Frequency deviation	DC ~ 30 MHz	DC ~ 40 MHz	DC ~ 60 MHz
Modulation frequency	2 mHz ~ 1 MHz (The modulation source is internal)		
PM			
Carrier wave	Sine wave, square wave, ramp wave, arbitrary wave		
Source	Internal/External		
Modulation wave	Sine wave, square wave, ramp wave, noise, arbitrary wave		
Phase deviation	0 ~ 360°		
Modulation frequency	2 mHz ~ 1 MHz (The modulation source is internal)		
DSB-AM			
Carrier wave	Sine wave, square wave, ramp wave, arbitrary wave, pulse wave		
Source	Internal/External		
Modulation wave	Sine wave, square wave, ramp wave, noise, arbitrary wave		
Modulation depth	0% ~ 100%		
Modulation frequency	2 mHz ~ 1 MHz (The modulation source is internal)		
ASK			
Carrier wave	Sine wave, square wave, ramp wave, arbitrary wave, pulse wave		
Source	Internal/external		
Modulation wave	Square wave (Duty ratio 50%)		
Modulation frequency	2 mHz ~ 1 MHz (The modulation source is internal)		
FSK			
Carrier wave	Sine wave, square wave, ramp wave, arbitrary wave, pulse wave		
Source	Internal/external		
Modulation wave	Square wave (Duty ratio 50%)		

Hopping frequency	Carrier Frequency
Modulation frequency	2 mHz ~ 1 MHz (The modulation source is internal)
PSK	
Carrier wave	Sine wave, square wave, ramp wave, arbitrary wave
Source	Internal/external
Modulation wave	Square wave (Duty ratio 50%)
Modulation frequency	2 mHz ~ 1 MHz (The modulation source is internal)
Phase	-360° ~ 360°
3FSK	
Carrier wave	Sine wave, square wave, ramp wave, arbitrary wave, pulse wave
Source	Internal
Modulation wave	Square wave (Duty ratio 50%)
Hopping frequency	Carrier Frequency
Modulation frequency	2 mHz ~ 1 MHz (The modulation source is internal)
4FSK	
Carrier wave	Sine wave, square wave, ramp wave, arbitrary wave, pulse wave
Source	Internal
Modulation wave	Square wave (Duty ratio 50%)
Hopping frequency	Carrier Frequency
Modulation frequency	2 mHz ~ 1 MHz (The modulation source is internal)
BPSK	
Carrier wave	Sine wave, square wave, ramp wave, arbitrary wave
Source	Internal
Symbol	PN3, PN5, PN7, PN9, PN11, PN13, PN15, PN17, PN21, PN23, PN25, PN27, PN29, PN31
Symbol bit rate	2 mbps ~ 1 Mbps (The modulation source is internal)
Phase	-360° ~ 360°
QPSK	
Carrier wave	Sine wave, square wave, ramp wave, arbitrary wave
Source	Internal
Symbol	PN3, PN5, PN7, PN9, PN11, PN13, PN15, PN17, PN21, PN23, PN25, PN27, PN29, PN31
Symbol bit rate	2 mbps ~ 1 Mbps (The modulation source is internal)
Phase	-360° ~ 360°
OSK	
Carrier wave	Sine wave

Source	Internal/external
Oscillation time	5ns ~ 250s
Modulation frequency	2 mHz ~ 1 MHz (The modulation source is internal)
SUM	
Carrier wave	Sine wave, square wave, ramp wave, arbitrary wave, pulse wave, harmonics, noise
Source	Internal/External
Modulation wave	Sine wave, square wave, ramp wave, noise, arbitrary wave
Modulation depth	0% ~ 100%
Modulation frequency	2 mHz ~ 1 MHz (The modulation source is internal)
QAM	
Carrier wave	Sine wave
Constellation mapping	QAM4, QAM8, QAM16, QAM32, QAM64, QAM128, QAM256
Symbol	PN3, PN5, PN7, PN9, PN11, PN13, PN15, PN17, PN21, PN23, PN25, PN27, PN29, PN31
Symbol bit rate	2 mbps ~ 1 Mbps
PWM	
Carrier wave	Pulse
Source	Internal/external
Modulation wave	Sine wave, square wave, ramp wave, noise, arbitrary wave
PWM range	0% ~ 49.99%
Modulation frequency	2 mHz ~ 1 MHz (The modulation source is internal)

Sweep

Frequency sweep	
Carrier wave	Sine wave, square wave, ramp wave, arbitrary wave, pulse wave
Type	Linear, Logarithmic, Stepwise
Trigger Source	Internal, external, manual
Trigger Edge	Rising edge, falling edge
Trigger Output	On, off
Frequency sweep time	1ms ~ 500s ± 0.1% (Lin, Log)
Residence time	1ms ~ 500s ± 0.1% (step)
Step number	2 ~ 2048 step

Burst

Burst

Waveform	Sine wave, square wave, ramp wave, pulse, arbitrary wave
Mode of pulse train	N cycle, infinite, gated
Initial and stop phase	-360° ~ 360°
Source	Manual, external, internal
Trigger edge	Rising edge/falling edge
Trigger Output	On, off
Internal cycle	1us ~ 500s ± 0.1%
Recurring number	1 ~ 50000
Polarity	Positive and negative (TTL level input)

Auxiliary functions

Channel settings

Channel output	On, off
Channel reverse	On, off
Synchronous output	CH1, CH2, Off
Load	50 Ω, 75 Ω, HighZ, Custom (1 Ω ~ 999999 Ω)
Amplitude limitation	On, off
Upper limit of amplitude	-9.998V ~ 10V (HighZ)
Lower limit of amplitude	-10V ~ 9.998V (HighZ)

Channel replication

Channel 1 replication	CH1→CH2
Channel 2 replication	CH2→CH1

Channel Follow

Follow type	Parameter following, channel tracking
Parameter Follow	Frequency following, amplitude following, phase following
Follow type	Deviation, Ratio

Channel stacking

Channel 1 overlay	On, off
Channel 2 overlay	On, off

System settings

Language	English, Chinese, Deutsch
Phase synchronization	Independent, synchronized

Voice	On, off
Number separator	Comma, space, none
Backlight	10%, 30%, 50%, 70%, 90%, 100%
Screen saver	Off, 5 minutes, 15 minutes, 30 minutes, 1 hour
Frequency meter	
Measurement frequency range	100 mHz ~ 200 MHz
Input Level Range	TTL compatibility
Measurement accuracy	7 digits

Interface and Display

Interface

Standard configuration USB Host, USB Device, LAN

Synchronous signal output

Output level	TTL compatible
Frequency	1 µHz ~ 10 MHz
Output Impedance	50 Ω (Typical)
Coupling method	DC

External modulation input

Input frequency	<50 KHz
Depth	±5 Vpk=100%
Impedance	5k Ω (Typical)

External reference input

Input frequency	10 MHz ± 50Hz
Input level	TTL compatible
Impedance	10k Ω (Typical value, DC coupling)
Lock time	<1s

Internal reference output

Input frequency	10 MHz
Input level	TTL compatible
Impedance	50 Ω (Typical value, DC coupling)

Trigger Input

Input level	TTL compatible
Slope	Rising or falling
Pulse width	>100ns

Impedance	10k Ω (Typical value, DC coupling)
Response time	<1us (Typical value)
Trigger Output	
Input level	TTL compatible
Pulse width	> 400ns (Typical value)
Impedance	50 Ω (Typical value)
Display screen	
Display Type	4.3 inches TFT LCD Capacitive Touch Screen
Display resolution	WVGA(480×272)

General Technical Specifications

Specifications		
Supply voltage	100 ~ 240 VAC (Fluctuations: ±10%), 50 Hz/60Hz; 100 ~ 120 VAC (Fluctuations: ±10%), 400 Hz	
Power consumption	< 50 W	
Fuse	2.5 A, Class T, 250 V	
Environment		
Temperature range	Operation: +10 °C ~ +40 °C Non operational: -20 °C ~ +60 °C	
Cooling method	Natural cooling	
Humidity range	+35 °C Below: ≤90% relative humidity +35 °C ~ +40 °C: ≤60% relative humidity	
Altitude	Operating below 2, 000 m Non-operating below 15, 000 m	
Class of pollution	2	
Operating environment	indoor	
Mechanical specifications		
Dimensions	215mm×103mm×316mm (Width x Height x Length)	
Net weight	2.5 kg	
Calibration cycle	The recommended calibration circle is one year	
Regulatory standards		
EMC	Compliance with EMC directives (2014/30/EU), Conform to or better than IEC 61326-1:2021/EN61326-1:2021, IEC 61326-2-1:2021/EN61326-2-1:2021	
Conductive disturbance	CISPR 11/EN 55011	CLASS B group 1, 150kHz-30 MHz

Radiation disturbance	CISPR 11/EN 55011	CLASS B group 1, 30 MHz-1GHz
Electrostatic discharge (ESD)	IEC 61000-4-2/EN 61000-4-2	4.0 kV (Contact), 8.0 kV (air)
Radio frequency electromagnetic field immunity	IEC 61000-4-3/EN 61000-4-3	0 V/m (80 MHz to 1 GHz); 3 V/m (1.4 GHz to 2 GHz); 1 V/m (2.0 GHz to 2.7 GHz)
Electrical fast transient burst (EFT)	IEC 61000-4-4/EN 61000-4-4	2 kV (AC input port)
Surge	IEC 61000-4-5/EN 61000-4-5	1 kV (Live line to zero line) 2 kV (Fire/zero line to ground)
Immunity to RF continuous conduction	IEC 61000-4-6/EN 61000-4-6	3 V, 0.15-80 MHz
Voltage dips and short interruptions	IEC 61000-4-11/EN 61000-4-11	Voltage dip: 0% UT during 1 cycle; 40% UT during 10/12 cycles; 70% UT during 25/30 cycles Short Interruption: 0% UT during 250/300 cycles

Safety regulations

EN 61010-1:2010+A1:2019
 EN IEC61010-2-030:2021+A11:2021
 BS EN61010-1:2010+A1:2019
 BS EN IEC61010-2-030:2021+A11:2021
 UL 61010-1:2012 Ed.3+ R:19 Jul2019
 UL 61010-2-030:2018 Ed.2
 CSA C22.2#61010-1:2012 Ed.3+U1;U2;A1
 CSA C22.2#61010-2-030:2018 Ed.2

Ordering Information

	Description	Order No.
Models	Maximum output frequency 60 MHz	UTG2062X
	Maximum output frequency 80 MHz	UTG2082X
	Maximum output frequency 120 MHz	UTG2122X
Standard accessories	Power cord x 1	
	USB cable x 1	UT-D14
	BNC-BNC x 1	UT-L45
Recommended options	BNC--red and black alligator clip cable x1	UT-L02A
	10 W Power amplifier option	UT-M14

Remarks: All mainframe, accessories, optional can order from the local UNI-T distributor.

Warranty and Service

UNI-T Technical Support Hotline: 400-876-7822

If the instrument is under warranty or is covered by a maintenance contract, it will be repaired under the terms of warranty as below. If the instrument is no longer under warranty, UNI-T will notify you of the cost of repair after examining the instrument.

This instrument provide 3- years warranty for mainframes and 1-year warranty for accessories as standard.

The above warranty applies to all UNI-TREND test measurement instrument products procured through the UNI-TREND authorized distributors. Product purchased from outside the UNI-TREND instruments network will be serviced by the selling agents and not UNI-TREND TECHNOLOGY.

Please Go to UNI-T official website ->instruments->support->Where to buy to find the authorized test and measurement instrument distributors.

UNI-T is the licensed trademark of UNI-TREND TECHNOLOGY CO., Ltd. The product information in this document subject to update without notice. For more information on UNI-T Test & Measure Instrument products, applications or service, please contact UNI-T instrument for support, the support center is available.



Copyright © UTG2000X-2023-12 All Rights Reserved.