



# uVision™ 365 STANDARD SERIES



## IP Rated, Fanless LED UV-A Inspection Lamps

UV-365ES, UV-365EH, & UV-365MEH

- Compact, cost-effective handheld inspection lamps
- Available in two intensities to suit your specific needs: standard-intensity & high-intensity
- Can be used in forensics, specialty UV applications, and NDT/NDE
- Mobile AC/DC version available!









Fanless & Cool Running



Lightweight & Rugged



### uVision™ 365 UV-365 STANDARD SERIES

MODEL	NOMINAL STEADY-STATE UV-A (365 nm) INTENSITY at 15 in (38 cm) •	VISIBLE LIGHT MEASUREMENT	UV-A COVERAGE AREA at 15 in (38 cm) at minimum 1,200 μW/cm²	AC/DC MOBILE Version
UV-365ES*	4,700 μW/cm <sup>2</sup>	< 1 foot-candle (11 lux)	6 in (15.24 cm) Diameter	
UV-365EH*	7,000 μW/cm²	< 1 foot-candle (11 lux)	7 in (17.78 cm) Diameter	
UV-365MEH*	7,000 μW/cm <sup>2</sup>	< 1 foot-candle (11 lux)	7 in (17.78 cm) Diameter	

Light Source:	(3) UV-A LEDs, (1) white light LED
Lamp Style:	Pistol grip
Lamp Head Diameter:	3.3 in (8.38 cm)
Height:	7.5 in (19 cm)
Width:	3.5 in (8.9 cm)
Weight:	1.7 lb (0.73 kg) (without battery pack)
White Light LED Intensity:	400 foot-candles (4,306 lux)
Power Requirements:	100-120VAC / 12VDC (Also available in 230V & 240V versions)
Battery Pack:	Type: 12V, NiMH (rechargeable) Run time: 3.5 hours continuous Charge time: 2 hours

<sup>◆</sup> UV-A intensity reading taken with the Spectroline® AccuMAX™ Series meter, and is factory set to the value shown.



**uVision™ 365** AC/DC MOBILE KIT

#### UV-365MEH

#### Kit Includes:

Lamp with AC power supply, UV-absorbing spectacles, battery pack with 12V rechargeable NiMH battery, comes in a padded case.




 $C \in$ 



**CERTIFICATE OF LIGHT OUTPUT** 

#### **UV-A** Beam Profiles

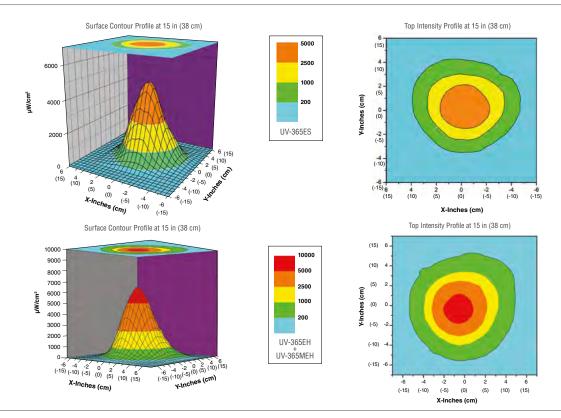

**DISTRIBUTED BY:** 



<sup>\*</sup>Each lamp is fitted with an 8-foot cord and the appropriate plug for the country of destination. An optional 20-foot cord is available. The "/20" suffix denotes the 20-foot power cord options.