

Digi-Sense® Mini Digital Thermometers with Remote Probe

Easily read temperature from a distance

– 304 stainless steel penetration stem

A. Standard Remote Probe Thermometer has a 3-ft flexible cord and °F/°C switchable ranges. Magnetic back allows for placement on metal surfaces such as freezers, incubators, or water baths. Includes flip-open stand, and spring fastener for clipping onto any edge.

B. Deluxe Remote Probe Thermometer features a 3-ft flexible cord, °F/°C switchable ranges, display updates every second, high/low alarm, Min/Max memory, and Hold function. Magnetic back allows for placement on metal surfaces; freezers, incubators or water baths. Includes a flip-open stand, and spring fastener for clipping onto any edge.


C. Waterproof Remote Probe Thermometer has a 10-ft flexible cord, °F/°C switchable ranges, a display that updates every second, and Min/Max memory. Perfect for wet areas—case is water/shockproof and probe is impervious to acid and solvents. Supplied with suction cups, magnet, and self-adhesive hook and loop tabs to attach to any surface.



D. Panel-Mount Remote Probe Thermometer features a 10-ft flexible cord, °F/°C switchable ranges, a large easy-view LCD, and records minimum and maximum readings over time. Versatile panel-mount module snaps into place or can be used as a stand-alone unit.

E. Stick-Style Remote Probe Thermometers have a 3-ft flexible cord, Min/Max memory, and simultaneous display of probe and ambient temperatures. Meter is chemical-resistant and shockproof; comes with a remote sensor and cable that can be submerged. Use as a pocket thermometer or mount for continuous use with the supplied self-adhesive hook and loop tabs.

What's included: battery and NIST-traceable calibration report supplied by the manufacturer.

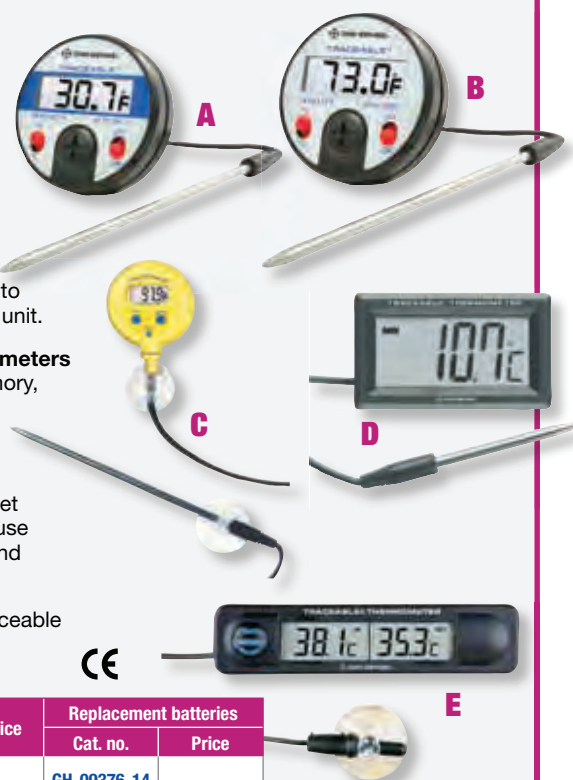

Key letter	Range	Resolution	Accuracy	Probe	Catalog number	Price	Replacement batteries	
							Cat. no.	Price
A	–58 to 500°F (–50 to 250°C)	0.1°F (0.1°C)	±1°C between –20 to 100°C, otherwise ±1.5° outside range	5½" L x 0.14" dia	GH-90205-20		GH-09376-14	
B	–58 to 572°F (–50 to 300°C)	0.1°F (0.1°C)	±1°C between –20 to 100°C, otherwise ±1.5° outside range	5½" L x 0.14" dia	GH-90205-21		GH-09376-14	
C	–58 to 572°F (–50 to 300°C)	0.1° from –19 to 199.9°; 1° outside this range	±2.0°F (±1°C)	5" L x 0.14" dia	GH-90205-22		GH-09377-16	
D	–58 to 572°F (–50 to 300°C)	0.1° from –20 to 200°; 1° outside this range	±1°C between –20 to 100°C, otherwise ±1.5° outside range	2¾" L x 0.14" dia	GH-90205-26		GH-09376-14	
E	–58 to 158°F	0.1°F	±1.0°F	0.20" dia	GH-90205-24		GH-09376-14	
	(–50 to 70°C)	0.1°C	±1.0°C		GH-90205-23			

Accessories

[GH-17003-00](#) NIST-traceable recalibration with data for pocket thermometers

Digi-Sense® Wireless Thermometer Sets

No more cables



- Remote probe measures air, liquid, or solids
- Monitor temperature continuously—data transmitted every 30 seconds

Wireless signal from weatherproof remote sensor broadcasts temperature measurements up to 100 feet in an open area. A total of three modules may be used with the main receiver. Each module is supplied with an internal and external sensor. External sensor can be used under water and is supplied with a 10-ft L cable. Receiver and modules can be switched from °F to °C. The receiver displays data from all three transmitting modules on temperature trends, Min/Max memory and has a alarm function. Supplied with self-adhesive hook and loop tabs and bracket for wall mounting or has a flip-out stand for tabletop use.



94460-84

Description		Wireless thermometer with bottle probe	Wireless thermometer set	Wireless thermometer with humidity set
Catalog number		GH-37804-10	GH-94460-78	GH-94460-84
Temperature	Range	–4 to 140°F (–20 to 60°C)	–58 to 158°F (–50 to 70°C)	–4 to 140°F (–20 to 60°C)
	Resolution	0.1°F (0.1°C)		
	Accuracy	±1°F (±1°C)		
Humidity	Range	—		25 to 90%
	Resolution	—		0.01
	Accuracy	—		2% RH midrange, otherwise ±4%
Power		Monitor/receiver: two AAA batteries; Remote sensor module: two AA batteries		
Price				

What's included: one receiver, one remote sensor module, probe, two AA batteries, two AAA batteries, mounting hardware, and NIST-traceable calibration report supplied by the manufacturer.

Accessories

[GH-37804-11](#) Additional wireless remote sensor module for model 37804-10, includes two AA batteries
[GH-94460-79](#) Additional wireless remote sensor module for model 94460-78, includes two AA batteries
[GH-94460-85](#) Additional wireless remote sensor module for model 94460-84, includes two AA batteries