
Bearing Checker

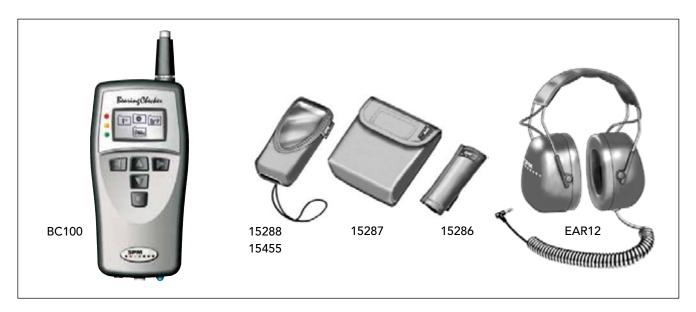

Bearing Checker is a portable instrument for fast and easy measurement of bearing condition in preventive maintenance. The instrument is push button controlled and basic measurement data are entered manually.

Bearing Checker measures shock pulses with a built-in probe and machine surface temperature with an infrared sensor. The instrument can also be used as an electronic stethoscope for detecting machine sound irregularities.

Technical data

Material, casing: ABS/PC

Size: 158 x 62 x 30 mm

(6.2 x 2.4 x 1.2 in)

Weight: 185 g (6.5 ounces) including

batteries

Keypad: Sealed membrane (silicone

rubber)

Display: Graphic monochrome, 64 x

128 pixels, LED backlight

Bearing condition Green, yellow and red light

indication: diodes

Measurement indication: Blue light diode

Power supply: 2 x 1.5 V AA batteries, alcaline

or rechargeable

Battery life: > 20 hours of normal use Operating temperature: $0 \,^{\circ}\text{C}$ to $+50 \,^{\circ}\text{C}$ (32 $^{\circ}\text{F}$ to 122 $^{\circ}\text{F}$)

Input connector: Lemo coaxial, for external

shock pulse transducers (probe

or quick connector)

Output connector: 3.5 mm stereo mini plug for

headphones

General functions: Battery status display, trans-

ducer line test, metric or Imperial units of measurement, language independent menus with symbols, storage of up to

10 measurement values

Shock pulse measurement

Measurement technique: dBm/dBc, measuring range

-9 to 90 dBsv, <u>+</u>3 dBsv

Transducer type: Built-in probe transducer

Temperature measurement

Temperature range: -10 to +185 °C (14 to +365 °F)

Resolution: 1 °C (1 °F)

Transducer type: Thermopile Sensor TPS

334/3161, built-in contact free

IR-sensor

Stethoscope

Earphone mode: 8 level amplification

Article numbers

BC100 Bearing Checker, excl. batteries and accessories

Accessories

EAR12 Headphones with eardefenders TRA73 External transducer with probe

TRA74 Transducer with quick connector for adapters

CAB52 Measuring cable, 1.5 m, Lemo - BNC slip-on

15286 Belt holder for external probe transducer

15287 Belt case for accessories

15288 Protective cover with wrist strap15455 Protective cover with belt clip93363 Cable adapter, Lemo - BNC

93062 Cable adapter, BNC - TNC, plug-jack

