

# 735A Measure Leak, LEL and CO

## Test the TPI Advantage



### Partial List of Industries:

#### USERS:

- Utilities
- Maintenance
- Fire Departments
- Safety Inspectors
- Home Inspectors
- Water/Sewer Departments
- Heating Contractors
- Utility Contractors
- Industrial Plants
- Propane Marketers

#### APPLICATIONS:

- Gas Leak Survey/Investigations
- Confined Space Monitoring
- Gas Emergency Investigations
- Vessel Testing



Designed to quickly and accurately measure natural and propane gas leaks, as well as carbon monoxide concentrations

### PHYSICAL

#### PRODUCT SPECIFICATIONS

**Size:** 11.5" x 3" x 2.32" (292 x 76 x 69 mm)

**Weight:** 1.2 Lbs.

**Operational Temp:** 0 to 120° F

**Storage Temp:** -20 to 132° F

**Battery Life:** 3 "C" size alkaline batteries  
- 16 Hrs. continuous


### SENSOR

TYPE	RESOLUTION	RANGE	ACCURACY
Leak	N/A	0 -50,000ppm	N/A
LEL	0.1%	0-100%	±10%
CO	1ppm	0-2000ppm	±5ppm or 5%*

\* Whichever is greater

### STANDARD FEATURES

- Internal Pump
- Water/Dust Filter
- Push Button Operation
- Field Calibration
- Date/Time Display
- Calibration Alert
- Operation Memory
- Calibration Memory
- Infrared Download
- Audible/Visual Alarms
- Backlit LCD
- Hard Carrying Case
- Programmable Auto Shut Off

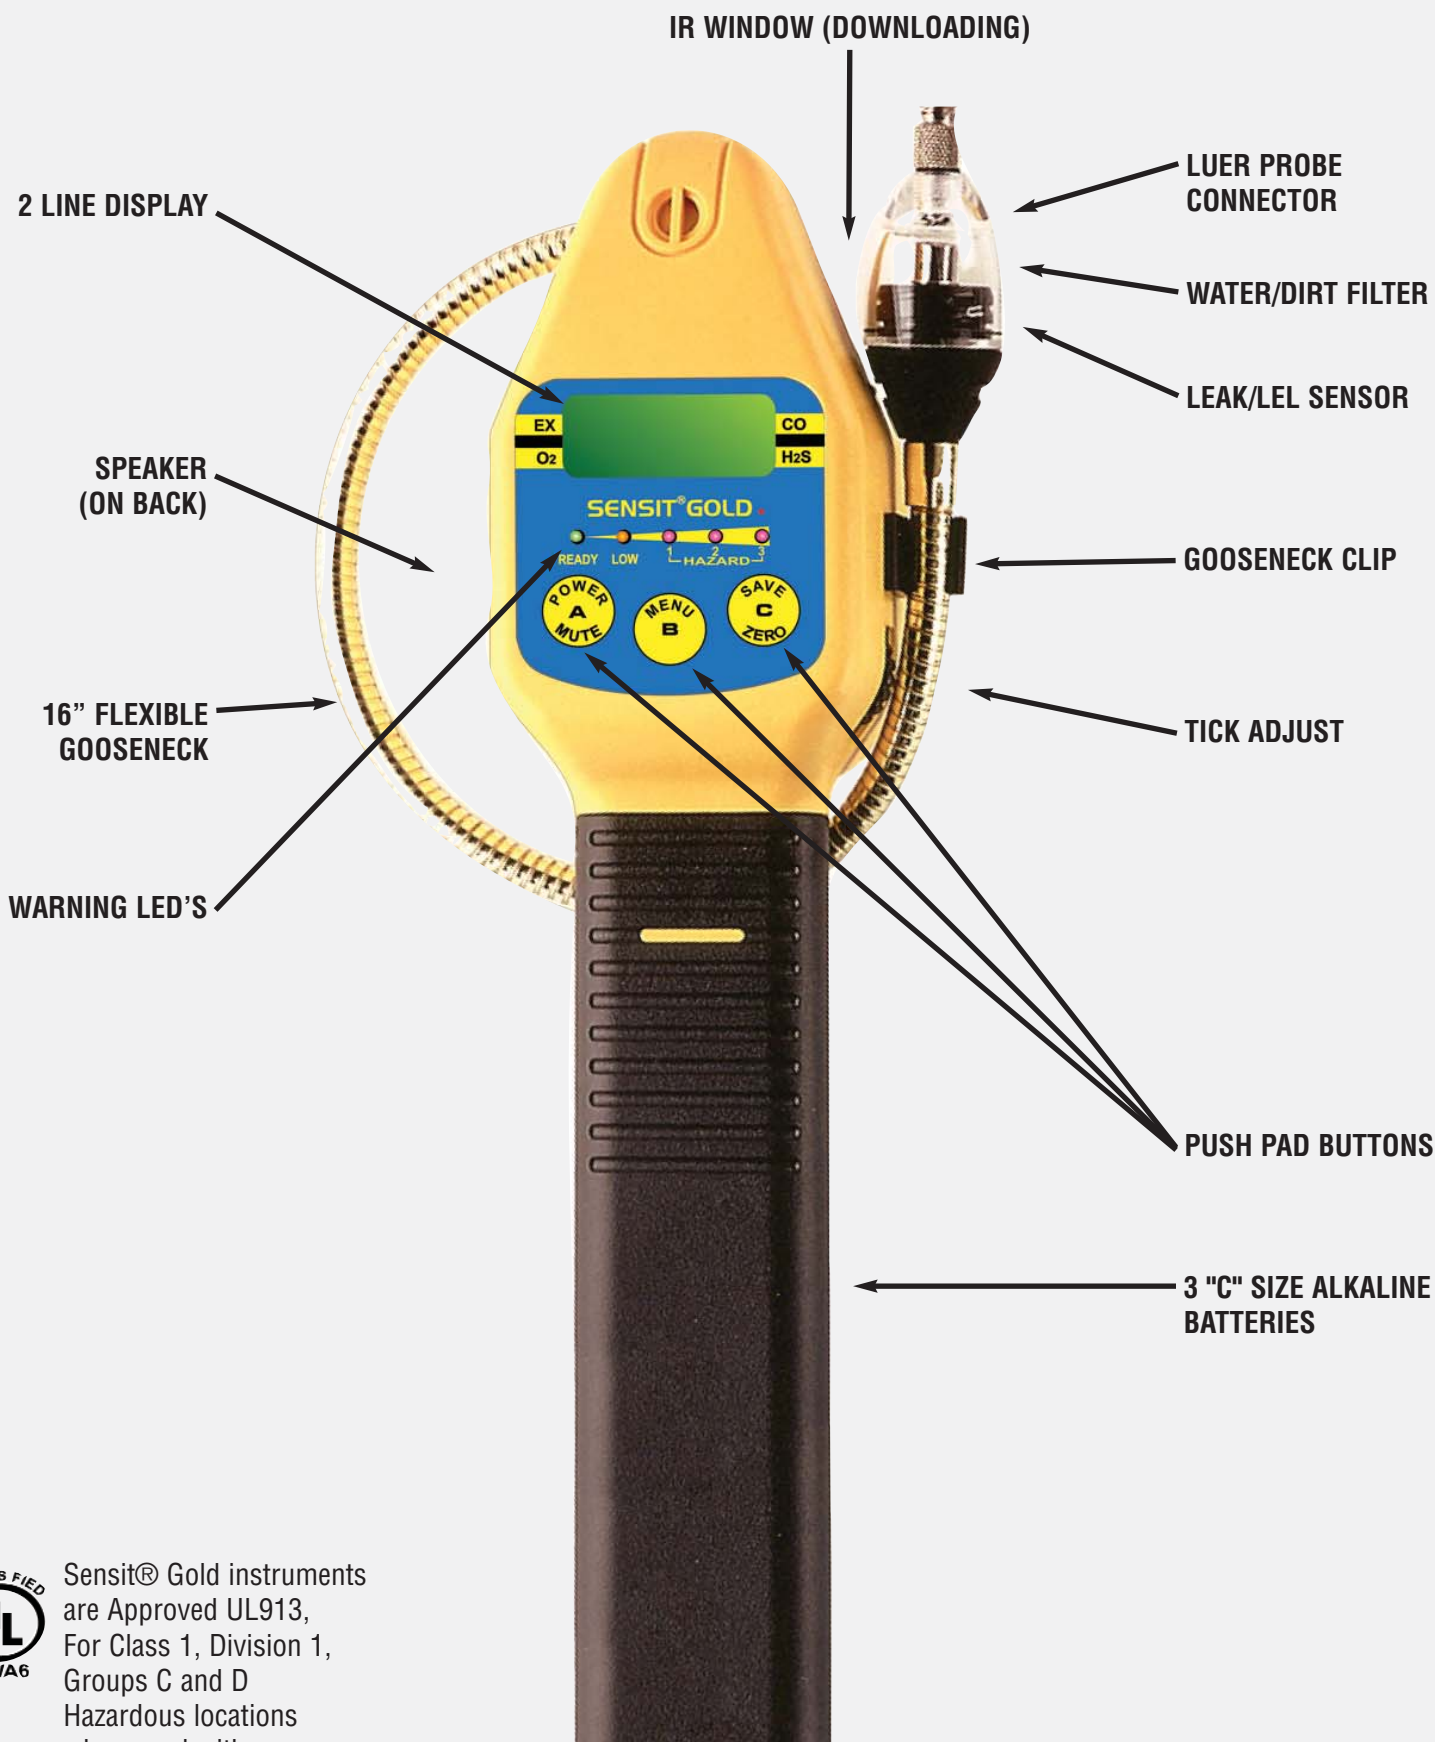

Sensit® Gold instruments are Approved UL913, For Class 1, Division 1, Groups C and D Hazardous locations when used with alkaline batteries.

Size: 11.5" x 3" x 2.32" (292 x 76 x 69 mm)  
Weight: 1.2 Lbs.